

TROPICAL RAINFALL MEASURING MISSION SCIENCE DATA AND INFORMATION SYSTEM

Interface Control Specification Between the Tropical Rainfall Measuring Mission Science Data and Information System (TSDIS) and the TSDIS Science User (TSU) TSDIS-P907

Volume 3 File Specifications for TSDIS Products - Level 1

Release 3

Prepared for:

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
GODDARD SPACE FLIGHT CENTER
Code 902
Greenbelt, Maryland 20771

Prepared by:

GENERAL SCIENCES CORPORATION
Laurel, Maryland 20707
Contract Number - NAS5-32351

October 30, 1996

TABLE OF CONTENTS

	<u>Page</u>
1. INTRODUCTION.....	1-1
1.1 Identification.....	1-1
1.2 Scope	1-1
1.3 Purpose And Objectives.....	1-1
1.4 Document Status And Schedule.....	1-2
1.5 Document Organization.....	1-2
2. EOSDIS AND HDF.....	2-1
2.1 EOSDIS Structures	2-1
2.1.1 Swath Structure.....	2-1
2.1.2 Planetary Grid Structure.....	2-5
2.1.3 Radar Grid Structure.....	2-6
2.1.4 Radar Structure	2-7
2.2 Hierarchical Data Format (HDF).....	2-8
2.2.1 Relevant HDF Data Models	2-8
2.2.2 HDF Structures for Metadata.....	2-9
2.3 Metadata Implementation	2-9
3. FORMATTING CONVENTIONS.....	3-1
3.1 File Structure Figures	3-1
3.2 File Contents.....	3-1
3.3 Missing Data	3-1
3.4 Array Dimension Order.....	3-1
3.5 Orbit And Granule Definition.....	3-2
3.6 Scans In A Granule.....	3-4
3.7 Time.....	3-4
3.8 QAC Error Type.....	3-7
4. TRMM MICROWAVE IMAGER (TMI)	4-1
4.1 Instrument And Scan Geometry.....	4-1
4.2 Design Considerations.....	4-2
4.3 Level-1A.....	4-4

TABLE OF CONTENTS

	<u>Page</u>
4.4 Instrument Analysis Products.....	4-7
4.5 Level-1B.....	4-7
4.5.1 Structure.....	4-7
4.5.2 Contents	4-7
5. VISIBLE AND INFRARED SCANNER (VIRS).....	5-1
5.1 Instrument And Scan Geometry.....	5-1
5.2 Design Considerations.....	5-1
5.3 Level-1A.....	5-2
5.4 Instrument Analysis Products.....	5-5
5.5 Level-1B.....	5-5
5.5.1 Structure.....	5-5
5.5.2 Contents	5-5
6. PRECIPITATION RADAR.....	6-1
6.1 Instrument And Scan Geometry.....	6-1
6.2 Design Considerations.....	6-3
6.3 Level-1A.....	6-4
6.4 Instrument Analysis Products.....	6-9
6.5 Level-1B.....	6-9
6.5.1 Structure.....	6-9
6.5.2 Contents	6-11
6.6 Level-1C.....	6-17
7. GROUND VALIDATION RADAR.....	7-1
7.1 Instrument And Scan Geometry.....	7-1
7.2 Design Considerations.....	7-4
7.3 Level 1B And 1C.....	7-5
7.3.1 Structure.....	7-6
7.3.2 Contents	7-8

TABLE OF CONTENTS

	<u>Page</u>
8. ISSUES.....	8-1
9. ABBREVIATIONS AND ACRONYMS.....	9-1
10. GLOSSARY.....	10-1

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
2.1.1-1	Generic Swath Structure.....	2-1
2.1.2-1	Generic Planetary Grid Structure	2-5
2.1.3-1	Generic Radar Grid Structure	2-7
3.1-1	Example Product Structure	3-2
3.5-1	Granule Structure.....	3-3
4.1-1	TMI Scan Geometry.....	4-1
4.5.1-1	TMI Level-1B Structure.....	4-8
5.5.1-1	VIRS Level-1B Structure.....	5-6
6.1-1	PR Scan Geometry	6-2
6.1-2	Normal Sample Data Array.....	6-3
6.5.1-1	PR Level-1B Structure.....	6-10
6.5.2-1	Normal Sample Data Array.....	6-17
7.1-1	Schematic Showing the Geometry of a Radar Bin.....	7-2
7.3.2-1	ROLL.....	7-15
7.3.2-2	PITCH	7-16
7.3.2-3	HEADING and DRIFT.. ..	7-16
7.3.2-4	ROTATION ANGLE.....	7-17
7.3.2-5	TILT.....	7-17

LIST OF TABLES

<u>Table</u>		<u>Page</u>
2.1.1-1	Relations Between Geolocation and Pixels.....	2-4
2.1.2-1	GridStructure Fields.....	2-5
2.1.3-1	Fields in PS Metadata which Specify the Radar Grid Structure.....	2-7
3.7-1	TMI Equations	3-6
3.7-2	OFFSET Values.....	3-6
3.8-1	Error Fields.....	3-7
4.2-1	Comparison of Wentz with TSDIS Format.....	4-3
4.3-1	Description of 1A-11.....	4-4
4.3-2	Description of 1A-11 Header.....	4-6
4.5.2-1	Scan Time (Vdata Table, record size 8 bytes, nscan records)	4-7
4.5.2-2	Scan Status (Vdata, record size 21 bytes, nscan records).....	4-9
4.5.2.-3	Calibration (Vdata Table, record size 95 bytes, nscan records).....	4-11
4.5.2-4	Low Resolution Channels (SDS, array size 7 x 104 x nscan, 2-byte integer)....	4-12
4.5.2-5	High Resolution Channels (SDS, array size 2 x 208 x nscan, 2-byte integer) ..	4-13
5.1-1	Channels where VIRS Measures Radiance Values	5-1
5.3-1	Description of 1A-VIRS	5-2
5.3-2	Description of 1A-01 Header.....	5-3
5.5.2-1	Scan Time (Vdata Table, record size 8 bytes, nscan records)	5-7
5.5.2-2	Scan Status (Vdata, record size 19 bytes, nscan records).....	5-7
5.5.2-3	VIRS Range and Accuracy	5-11
6.3-1	Description of 1A-21.....	6-4
6.3-2	Description of 1A-21 Header.....	6-7
6.3-3	Description of the PR Science Data Packet (APID # 53).....	6-8
6.5.2-1	Ray Header (Vdata Table, record size 60 bytes, 49 records).....	6-12
6.5.2-2	Scan Time (Vdata Table, record size 8 bytes, nscan records).....	6-12
6.5.2-3	Scan Status (Vdata Table, record size 15 bytes, nscan records)	6-13
6.5.2-4	Powers (Vdata Table, record size 6 bytes, nscan records).....	6-15
7.1-1	Ground Validation Radar Sites.....	7-3
7.1-2	Characteristics of Ground Based Radars.....	7-3
7.1-3	Volume Scan Characteristics	7-3
7.2-1	Names of DORADE Blocks and Corresponding HDF Objects	7-5
7.3-1	Parameters in GV Level-1 Products.....	7-5

LIST OF APPENDICES

<u>Appendix</u>		<u>Page</u>
A	ECS Core Metadata Elements	A- 1
B	PS Metadata Elements.....	B- 1
C	Reversibility from Level-1A to Level-0.....	C-1
D	Navigation.....	D-1

1. INTRODUCTION

The Tropical Rainfall Measuring Mission (TRMM) is an integral part of the National Aeronautics and Space Administration (NASA) Mission to Planet Earth (MTPE). The TRMM observatory is planned for launch in 1997 into a circular orbit of approximately 350 kilometers altitude with an inclination of 35 degrees and a period of 91.5 minutes (15.7 orbits per day). The TRMM Science Data and Information System (TSDIS) is the data processing and science information system for TRMM. The Earth Observing System Data and Information System (EOSDIS) serves as the long-term archive for all TRMM data products.

1.1 IDENTIFICATION

This is the Tropical Rainfall Measuring Mission (TRMM) Science Data and Information System (TSDIS) - TSDIS Science Users (TSU) Interface Control Specification Volume 3 File Specifications for TSDIS Products - Level 1.

1.2 SCOPE

This document describes the file formats for Level 1 TSDIS products. Level 2 and 3 products are described in Volume 4. Browse specifications are described in Volume 5.

1.3 PURPOSE AND OBJECTIVES

The purpose of this file specifications document is to define the file content and format for the TRMM Level-1 data products. Level-1 data products can be divided into Level-1A, Level-1B, and Level-1C data products.

The TRMM Science Requirements references intermediate products for the purpose of monitoring instruments and product production, which this document refers to as "Instrument Analysis Products." Since this data is not archived at EOSDIS, these formats are not described in this document.

The specifications in this document incorporate the results from a series of meetings with EOSDIS for agreements on file structure, and TRMM science team members for file contents. Discussions with other missions that have similar data sets have helped to form the initial basis for the file specifications. In addition, characteristics from popular formats were incorporated into the file formats (e.g., the Wentz format is used to help develop the TMI file specification).

1.4 DOCUMENT STATUS AND SCHEDULE

The file specifications have been reviewed by the algorithm developers and are expected to be fairly stable. The file specifications will be instrumental in developing the algorithm software, the TSDIS toolkit and refining the Data Volume Estimates. The schedule is as follows:

- | | | |
|-----------------------|----------|--|
| • Version 1 | 11/07/94 | Complete |
| • Version 2 | 12/07/94 | Complete |
| • Version 3 | 4/14/95 | Updated metadata with new EOSDIS definitions and updated orbit definition. |
| • ICS Release 2 | 8/31/95 | Incorporates comments from algorithm developers |
| • ICS Release 3 Draft | 3/14/96 | Incorporates file structure and metadata updates from EOSDIS. |
| • ICS Release 3 | 6/28/96 | Incorporates Level-1 PR modifications from NASDA |

1.5 DOCUMENT ORGANIZATION

This document is organized so that a section is dedicated to each instrument. The organization is as follows:

Section 2.0 EOSDIS AND HDF - This section describes EOSDIS structures, aspects of Hierarchical Data Format (HDF) which are used in the TSDIS file formats, and the approach to recording metadata.

Section 3.0 FORMATTING CONVENTIONS - This section describes general formatting conventions used in this document.

Section 4.0 TRMM MICROWAVE IMAGER (TMI) - This section describes the file specifications for the TMI instrument. It provides a brief description of the instrument and the scan geometry as an introduction. The structure of the TMI file is provided, along with descriptions of the data objects and the associated metadata.

Section 5.0 VISIBLE AND INFRARED SCANNER (VIRS) - This section describes the file specifications for the VIRS instrument. It provides a brief description of the instrument and the scan geometry as an introduction. The structure of the VIRS file is provided, along with descriptions of the data objects and the associated metadata.

Section 6.0 PRECIPITATION RADAR (PR) - This section describes the file specifications for the PR instrument. It provides a brief description of the instrument and the scan geometry as an introduction. The structure of the PR file is provided, along with descriptions of the data objects and the associated metadata.

Section 7.0 GROUND-BASED VALIDATION RADAR - This section describes the file specifications for the Ground Validation Radars (GV). It provides a brief description of the instrument and the scan geometry as an introduction. The structure of the GV file is provided, along with descriptions of the data objects and the associated metadata.

Section 8.0 ISSUES - This section identifies any outstanding issues from the discussions with EOSDIS or with the TRMM science team members.

2. EOSDIS AND HDF

2.1 EOSDIS STRUCTURES

2.1.1 Swath Structure

The swath structure was created by EOSDIS to store satellite data which are organized by scans. TSDIS implements the swath structure in Levels 1B, 1C, 2A, and 2B satellite products. Figure 2.1.1-1 shows a generic swath structure as it is used in TSDIS data products. The swath structure is contained in a Vgroup (Vgroups are defined in Section 2.2), with the name SwathData and the class SwathData. In the SwathData Vgroup are SwathStructure, Scan Time, Geolocation, scan data, and IFOV data. For all of these objects, the scan dimension has the least rapidly varying index. SwathStructure (details below) is a text block which specifies which geolocations and times apply to which elements of the IFOV data. The Scan Time is a Vdata (8-byte float or several integers whose sizes sum to 8 bytes; Vdata is defined in Section 2.2). The Geolocation is an SDS (defined in Section 2.2) containing latitude and longitude (4-byte float). Scan data are data that apply to the whole scan and can take the form of one or more Vdatas or SDSs. The IFOV data occur at every pixel or at regular pixel intervals (e.g., every 10 pixels) and take the form of one or more SDSs.

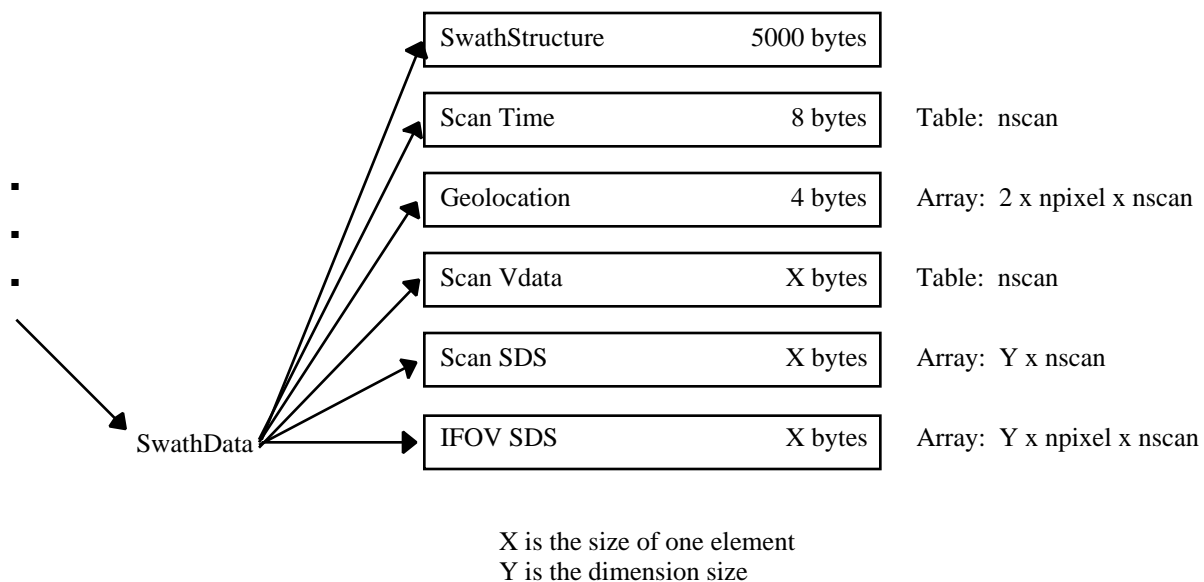


Figure 2.1.1-1
Generic Swath Structure

The purpose of the SwathStructure is to allow EOSDIS to ingest data into their archive; therefore, the Algorithm Developer will not need to read or write the data contained within this object. SwathStructure is an object that mimics an attribute, since HDF has not yet defined attributes for Vgroups. This imitation of an attribute is implemented as a single Vdata with the name SwathStructure, the class "Attr0.0", one field named "VALUES", number type of

DFNT_CHAR8, and order equal to the length of the text. This specification of SwathStructure anticipates the HDF development of attributes for Vgroups. The maximum expected size for SwathStructure is 5000 bytes. The fields within SwathStructure are written in Object Development Language (ODL), which is defined in the Planetary Data System Standard Reference.

SwathStructure relates Geolocation (including time) to the IFOV data. SwathStructure specifies this relationship first by defining each "dimension," where dimension means the size of one index of an array (not a physical dimension such as height). Dimensions of Scan Time, Geolocation, and IFOVs are defined. The names of the dimensions can be any name, but it is recommended to use names similar to those used in the following example. Second, parameters are defined. Examples of parameters are time, latitude, and brightness temperature. In the parameter definition, dimensions are stated in "C order," opposite to the order used in the format definitions later in this document. Parameters used to specify geolocation (normally Latitude, Longitude, and Time) are defined as GeoParameters. Data parameters (for example, radiance or rainfall) are defined as DataParameters. Third, the relationships (i.e., mappings) between geolocation and data parameters are defined in DimensionMap. The following example applies to Level-1B TMI, where the number of low resolution pixels in one scan is 104, the number of high resolution pixels in one scan is 208, the number of scans in one granule is 2991, the number of low resolution channels is 7, and the number of high resolution channels is 2.

```
OBJECT = Dimension
      Name = "nscan"
      Size = 2991
END_OBJECT
```

```
OBJECT = Dimension
      Name = "npixel_low"
      Size = 104
END_OBJECT
```

```
OBJECT = Dimension
      Name = "npixel_high"
      Size = 208
END_OBJECT
```

```
OBJECT = Dimension
    Name = "nchannel_low"
    Size = 7
END_OBJECT
```

```
OBJECT = Dimension
    Name = "nchannel_high"
    Size = 2
END_OBJECT
```

```
OBJECT = GeoParameter
    Name = "Latitude"
    DataType = float32
    Dimension = "nscan"
    Dimension = "npixel_high"
END_OBJECT
```

```
OBJECT = GeoParameter
    Name = "Longitude"
    DataType = float32
    Dimension = "nscan"
    Dimension = "npixel_high"
END_OBJECT
```

```
OBJECT = GeoParameter
    Name = "Time"
    DataType = float64
    Dimension = "nscan"
END_OBJECT
```

```
OBJECT = DataParameter
    Name = "Low Resolution Channels"
    DataType = int16
    Dimension = "nscan"
    Dimension = "npixel_low"
    Dimension = "nchannel_low"
END_OBJECT
```

```
OBJECT = DataParameter
    Name = "High Resolution Channels"
    DataType = int16
    Dimension = "nscan"
    Dimension = "npixel_high"
    Dimension = "nchannel_high"
END_OBJECT
```

```
OBJECT = DimensionMap
    DataDimension = "npixel_low"
    GeoDimension = "npixel_high"
    Offset = 0
    Increment = -2
END_OBJECT
```

DimensionMap specifies the relationship between a DataDimension and a GeoDimension. If the relationship is one-to-one, the DimensionMap may be omitted. In the example, both the High Resolution Channels and the Latitude and Longitude share the npixel_high dimension so no DimensionMap is written.

When the relationship between a DataDimension and a GeoDimension is not one-to-one, a DimensionMap specifies that relationship through Offset and Increment. The fields Offset and Increment specify which elements of the Geolocation or Scan Time array apply to which elements of the IFOV array. To understand Offset and Increment, consider the pixel dimension as an example. Offset is the pixel number (in zero based notation) of the first IFOV pixel to which the first geolocation applies. Increment is the pixel interval to which to apply the Geolocation. In the normal case, Offset = 0 and Increment = 1, meaning Geolocations 1, 2, 3, ... apply to IFOV pixels 1, 2, 3, ... The case where, for example, the second Geolocation applies to the first IFOV pixel is handled with a negative Offset. The case where, for example, every other Geolocation applies to every pixel is handled with a negative Increment. These and other examples for various relations between Geolocation and pixels are shown in Table 2.1.1-1.

Table 2.1.1-1
Relations Between Geolocation and Pixels

OFFSET	INCREMENT	GEOLOCATION PIXELS	IFOV PIXELS
0	1	1, 2, 3, ...	1, 2, 3, ...
0	2	1, 2, 3, ...	1, 3, 5, ...
0	-2	1, 3, 5, ...	1, 2, 3, ...
1	1	1, 2, 3, ...	2, 3, 4, ...
-1	1	2, 3, 4, ...	1, 2, 3, ...

To avoid repetitious text, certain defaults are used in this document for the formats of an IFOV object: in the scan dimension, Offset = 0 and Increment = 1 always; in the pixel dimension, Offset = 0 and Increment = 1 unless otherwise specified; the names of the dimensions are as above.

2.1.2 Planetary Grid Structure

The Planetary Grid Structure is a structure created by EOSDIS to store earth located grids. The grid is an array of grid boxes, rather than grid points. TSDIS employs the Planetary Grid Structure in Level 3A and 3B satellite products. Figure 2.1.2-1 shows a generic Planetary Grid Structure as it is used in TSDIS formats. The Planetary Grid Structure occupies part of a file. This structure is contained in a Vgroup, with the name PlanetaryGrid and the class PlanetaryGrid. In that Vgroup appear one GridStructure, one or more Data Grids, and other Data. GridStructure is a single Vdata which allows the geometric interpretation of the grids. GridStructure is an object that mimics an attribute, since HDF has not yet defined attributes for Vgroups. This imitation of an attribute is implemented as a Vdata with the name GridStructure and the class "Attr0.0", one field named "VALUES", number type of DFNT_CHAR8, and order equal to the length of the text. This specification of GridStructure anticipates the HDF development of attributes for Vgroups. The maximum expected size for GridStructure is 5000 bytes. Since the purpose of GridStructure is to allow EOSDIS to ingest data into their archive, Algorithm Developers do not need to read from or write to GridStructure. Table 2.1.2-1 specifies the fields within GridStructure. Six of the fields (the resolutions and bounding coordinates) are also found in Core Metadata. Three fields (bin_meth, registration, and Origin) are not found in Core Metadata.

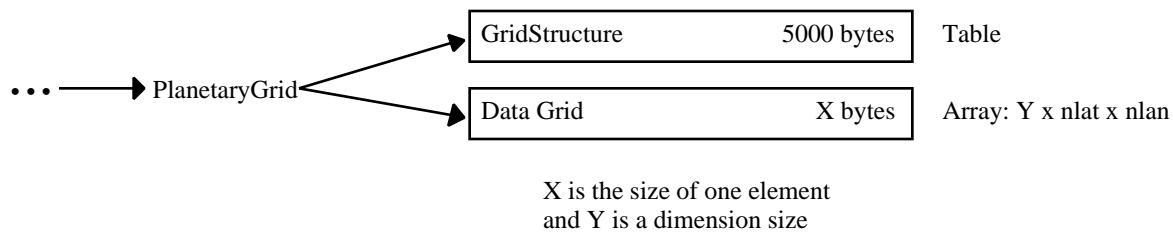


Figure 2.1.2-1
Generic Planetary Grid Structure

Table 2.1.2-1
GridStructure Fields

Name	Estimated Size (bytes)	Description
bin_meth	50	Method used to obtain the value in the bin. A simple mean would have the value "ARITHMEAN". Currently, no other values have been defined.
registration	50	Representative location within the bin. For example, if the center of the bin is the most representative location, the value "CENTER" would be used. Currently, no other values have been defined.
Latitude Resolution	50	North-south size of a bin (degrees latitude).
Longitude Resolution	50	East-west size of a bin (degrees longitude).
North Bounding Coordinate	50	Northern-most latitude (degrees) covered by the grid.
South Bounding Coordinate	50	Southern-most latitude (degrees) covered by the grid.
West Bounding Coordinate	50	Western-most longitude (degrees) covered by the grid.
East Bounding Coordinate	50	Eastern-most longitude (degrees) covered by the grid.
Origin	100	Origin of the grid indices. For example, "SOUTHWEST"

The fields of GridStructure are written as text using ODL. An example for the field named Registration follows:

```

OBJECT = Registration
Value = "CENTER"
END_OBJECT = Registration

```

Unless otherwise specified, bin_meth = "ARITHMEAN" and registration = "CENTER." TSDIS Planetary Grids will always have North Bounding Coordinate = 40, South Bounding Coordinate = -40, West Bounding Coordinate = -180, East Bounding Coordinate = 180, and Origin = "SOUTHWEST". Unless otherwise specified, Latitude Resolution = Longitude Resolution = 5.

Each Data Grid is an SDS with dimensions Y x nlat x nlon, where Y is the number of variables and nlat and nlon are the number of North-South and East-West grid points, respectively. The names of the latitude and longitude dimensions are Latitude_X and Longitude_X, where X is the name of the Data Grid SDS. Other dimensions have the names specified in the Swath description. The name of the SDS is the name of the variable contained in the grid.

One TSDIS product, 3A-25, has grids at two different resolutions, requiring 2 Grid Structures and a different naming convention than above. In this product there are two Vgroups with the names PlanetaryGrid1 and PlanetaryGrid2 and there are two GridStructures with the names GridStructure1 and GridStructure2.

To avoid repetitious text, certain defaults are used in this document for the formats of a Data Grid SDS: unless otherwise specified, the names of the dimensions are as above.

2.1.3 Radar Grid Structure

The Radar Grid Structure is a structure used to store TSDIS GV Level-2 and Level-3 grids. The Radar Grid Structure is a TSDIS defined EOSDIS structure. The grid is equivalent to the grid created by the NCAR SPRINT software and does not correspond to any standard projection. It is neither equal area nor equal angle. The grid is an array of grid points, rather than grid boxes. It has a fixed horizontal distance between grid points and an odd number of grid points in the x and y directions. The origin is in the central grid point of the lowest grid plane. Distances along the x and y directions are measured on a flat plane tangent to the earth's surface directly below the origin. The z distances are measured from mean sea level, perpendicular to this tangent plane. The x dimension coincides with east-west only along the x-direction grid line that intersects the origin. Similarly, the y dimension coincides with north-south only along the y-direction grid line that intersects the origin and the z dimension coincides with vertical only directly above the origin. The constant z grid planes follow the curvature of the earth.

Figure 2.1.3-1 shows a generic Radar Grid Structure as it is used in TSDIS formats. The Radar Grid Structure occupies part of a file. The Radar Grid Structure is contained in a Vgroup, with the name RadarGrid and the class RadarGrid. In that Vgroup appear one or more Data Grids along with other objects. Each Data Grid is an SDS with dimensions nx x ny x nz x nvol, where nx, ny, and nz are the grid dimensions in the x, y, and z dimensions and nvol is the number of Volume Scans (VOSs) in the granule. The fields needed to specify the grid, shown in Table 2.1.3-1, are specified in Product Specific (PS) metadata. The values of these fields are shown in Table 2.1.3-2.

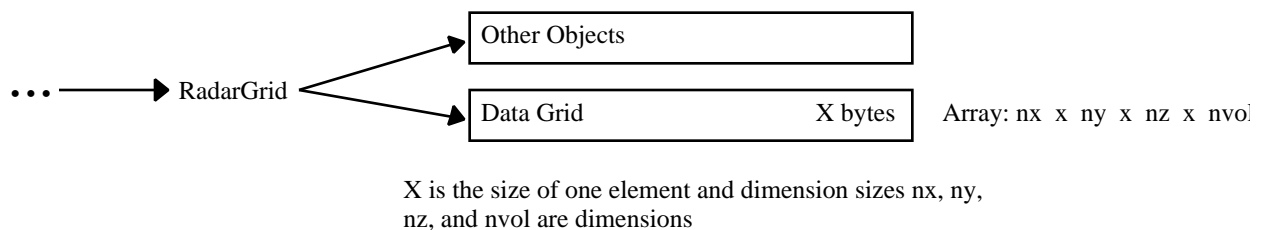


Figure 2.1.3-1
Generic Radar Grid Structure

Table 2.1.3-1
Fields in PS Metadata which Specify the Radar Grid Structure

Name	Estimated Size (bytes)	Description
Radar Grid Origin Latitude	50	Latitude (degrees) of the origin.
Radar Grid Origin Longitude	50	Longitude (degrees) of the origin.
Radar Grid Origin Altitude	50	Altitude (km) of the origin.
Radar Grid Spacing x	50	The zonal interval (km) between grid points.
Radar Grid Spacing y	50	The meridional interval (km) between grid points.
Radar Grid Spacing z	50	The vertical interval (km) between grid points.
Radar Grid Size x	50	The number of grid points in the zonal grid direction.
Radar Grid Size y	50	The number of grid points in the meridional grid direction.

Name	Estimated Size (bytes)	Description
Radar Grid Size z	50	The number of grid points in the vertical grid direction.

Table 2.1.3-2
Values of Radar Grid Structure Fields

Name	Texas	Florida	Single radar sites
Radar Grid Origin Latitude	28° 56' 59.0"	26° 21' 19.4"	Radar latitude
Radar Grid Origin Longitude	-95° 56' 12.5"	-81° 24' 26.3"	Radar longitude
Radar Grid Origin Altitude	1.5	1.5	1.5
Radar Grid Spacing x	2	2	2
Radar Grid Spacing y	2	2	2
Radar Grid Spacing z	1.5	1.5	1.5
Radar Grid Size x	285	353	151
Radar Grid Size y	363	257	151
Radar Grid Size z	13	13	13

2.1.4 Radar Structure

The Radar Structure is simply the navigation information within the GV Level-1B and Level-1C formats. The information to geolocate (radar latitude and longitude and the range, elevation, and azimuth of each bin) are contained in the formats.

2.2 HIERARCHICAL DATA FORMAT (HDF)

Level-1B and higher data products, except 2A-52, produced by TSDIS will be sent to EOSDIS in the Hierarchical Data Format (HDF). HDF was developed by the National Center for Supercomputing Applications (NCSA) at the University of Illinois at Urbana-Champaign and is the selection for the common data format for EOSDIS. HDF manuals and software may be obtained via anonymous ftp at <ftp.ncsa.uiuc.edu>. Communications to NCSA concerning HDF may be made by email to softdev@ncsa.uiuc.edu or by postal mail to

NCSA Software Tools Group HDF
152 Computing Applications Bldg.
605 E. Springfield Ave.
Champaign, IL 61820
USA

HDF is a multi-object file format for the transfer of graphical and numerical data between heterogeneous machines. The design of this format allows self-definition of data content, and easy extensibility for future enhancements or compatibility with other standard formats. HDF provides these benefits to algorithm developers and data users:

- **versatile file format:** HDF supports six different data models (8-bit raster model, palette model, 24-bit raster model, scientific data (SDS) model, annotation model, and the virtual data (Vdata) model).
- **extensible file format:** Although HDF currently supports six different data models, new data models will need to be incorporated in the future. HDF can easily accommodate new data models either through NCSA or HDF users.

- **self-describing:** HDF permits the inclusion of a data index (metadata) inside the data file which describes the contents of the file. This simplifies data sharing among diverse scientists.
- **portable file format:** HDF files are portable across heterogeneous computer systems. This allows for a HDF file created on one system (e.g., UNIX) to be used on a different system (e.g., Macintosh).
- **data abstraction:** When either reading or writing to an HDF file, the user does not have to be concerned with the physical layout of the file.

2.2.1 Relevant HDF Data Models

The EOSDIS data structures are composed of Vgroups and simple HDF models that are well tested and common to the science community. A Vgroup is like a node in a tree structure. The members of a Vgroup can be data models or more Vgroups. Of the six defined data models, the TSDIS file specifications use the following models:

- a) *Scientific Data Set* - An SDS is an HDF structure that stores rectangular gridded arrays of data, together with information about the data. An SDS can contain data that are multi-dimensional, but must be of a singular data type and composed of the following elements:
 - The actual data values.
 - The number of dimensions (rank) and the size of each dimension
 - The type of the data (e.g., integer or floating point)
 - (optional) Scales to be used along the different dimensions when interpreting or displaying the data
 - (optional) Labels for all dimensions and for the data
 - (optional) Units for all dimensions and for the data
 - (optional) Format specifications to be used when displaying values for the dimensions and for the data
 - (optional) A range, attributing maximum and minimum values for the data set.
 - (optional) Calibration information including an offset and scale factor.
 - (optional) A fill value for representing missing data in a data set.
 - (optional) The coordinate system to be used when interpreting or displaying the data
- b) *VData* - The HDF VData model provides a framework for storing related data in a table-like structure in HDF files. Each table is comprised of a collection of similar records called VData records, whose values are stored in fixed-length fields. Each field can support its own data types, however, every VData record in a table must contain the same types of fields.

2.2.2 HDF Structures for Metadata

Metadata are defined as information about data sets which provide a description of the content, format, and utility of the data set. The word metadata is derived from the Greek word Meta, meaning “with”. Metadata may be used to select data for a particular scientific investigation. Each metadata element will have the “label = value” structure. The “label” will be defined by EOSDIS for the core metadata, and by TSDIS for the product specific metadata; the “value” will be supplied by TSDIS. For some core fields though, the values will need to comply with EOSDIS guidelines.

EOSDIS has decided that metadata should be stored in file attributes. Attributes are blocks of text that are attached to either files or SDSs.

2.3 METADATA IMPLEMENTATION

The metadata elements contained in these file specifications were derived from the Proposed ECS Core Metadata Standard Release 2.0, the TSDIS - TSDIS Science User (TSU) Interface Control Specification, and personal communication with algorithm developers.

EOSDIS has divided the metadata elements into two (2) types: core metadata and product specific metadata. Core metadata are common to all or most products in EOSDIS and have been defined by EOSDIS. Product Specific metadata are only related to a particular product, or a group of similar products, and have been defined by TSDIS. Metadata elements are written using ODL.

Core metadata is stored in one file attribute named CoreMetadata.0. CoreMetadata.0 will contain the following structure:

```
OBJECT = <object_name1>;  
    Value = <object_value1>;  
    Data_Location = <data_location1>;  
    Mandatory = <mand_value1>;  
END_OBJECT = <object_name1>;
```

```
OBJECT = <object_name2>;  
    Value = <object_value2>;  
    Data_Location = <data_location2>;  
    Mandatory = <mand_value2>;  
END_OBJECT = <object_name2>;
```

.
.
.

```
OBJECT = <object_nameN>;  
    Value = <object_valueN>;  
    Data_Location = <data_locationN>;  
    Mandatory = <mand_valueN>;  
END_OBJECT = <object_nameN>;
```

Product Specific Metadata is stored in another file attribute named ProductMetadata.0.
ProductMetadata.0 will contain the following structure:

```
OBJECT = <object_name1>;  
    Value = <object_value1>;  
    Data_Location = <data_location1>;  
    Mandatory = <mand_value1>;  
END_OBJECT = <object_name1>;
```

```
OBJECT = <object_name2>;  
    Value = <object_value2>;  
    Data_Location = <data_location2>;  
    Mandatory = <mand_value2>;  
END_OBJECT = <object_name2>;
```

.
.
.

```
OBJECT = <object_nameM>;  
    Value = <object_valueM>;  
    Data_Location = <data_locationM>;  
    Mandatory = <mand_valueM>;  
END_OBJECT = <object_nameM>;
```

where <object_name> is the name of the metadata element, <object_value> is the value of the metadata element, Data_Location is always "PGE", Mandatory is "TRUE" or "FALSE" depending on whether the data is required by TSDIS to be included. For example, if the metadata element named UTCF_SECONDS had a value of 23 and was required, it would be stored as follows:

```
OBJECT = UTCF_SECONDS;  
    Value = 23;  
    Data_Location = "PGE";  
    Mandatory = "FALSE";  
END_OBJECT = UTCF seconds;
```

If the value is a list, for example with three elements, then Value is written as:

(Element1, Element2, Element3)

3. FORMATTING CONVENTIONS

3.1 FILE STRUCTURE FIGURES

The figures that illustrate file structure contain either Vgroups or data objects (metadata objects, SDSs, or Vdatas). Figure 3.1-1 is an example of a product structure with annotations shown in *italics*. Vgroups are represented as the name of the Vgroup without a box. Data objects are represented as the name of the object inside a box. For metadata objects the estimated maximum total size appears on the right hand side of the box. If the object is a Vdata table, the size of one record appears on the right side of the box and the number of records appears next to the box. If the object is a SDS array, the size of one element appears on the right side of the box and the dimensions of the array appear next to the box.

The sizes for the metadata objects are estimated maxima since the values of many metadata are free text and may vary in length and not all metadata elements are used for all products. None of the sizes take HDF overhead into account. Previous (unpublished) experience gained in the TSDIS prototype study and the HDF internal feasibility study has shown HDF overhead to be less than 10% of the total file size for TSDIS products.

3.2 FILE CONTENTS

In the description of the contents of each object within a file, each object is defined in the following format:

Name (Type of HDF structure, Dimensions, word size and type):
Description

3.3 MISSING DATA

Missing satellite scans are filled with standard values denoting missing data. Missing satellite scans also have the "missing" byte in Scan Status set to 1. Values less than or equal to -99, -9999, -9999, -9999.9, -9999.9 denote missing or invalid data for 1-byte integer, 2-byte integer, 4-byte integer, 4-byte float, and 8-byte float, respectively. Any exceptions to the use of these standard values are explicitly noted in the description of the object. For the PR instrument, scans whose mode is other than observation mode are filled with missing values. If an entire orbit of satellite data is missing, scan data is omitted and the metadata named "Orbit Size" has the value zero.

3.4 ARRAY DIMENSION ORDER

In the definition of array dimensions, e.g., npixel x nscan, the first dimension (npixel) has the most rapidly varying index and the last dimension (nscan) has the least rapidly varying index. To implement this format in FORTRAN, declare an array with dimensions as they appear in this document. To implement the format in C, declare an array with dimensions reversed from their appearance in this document.


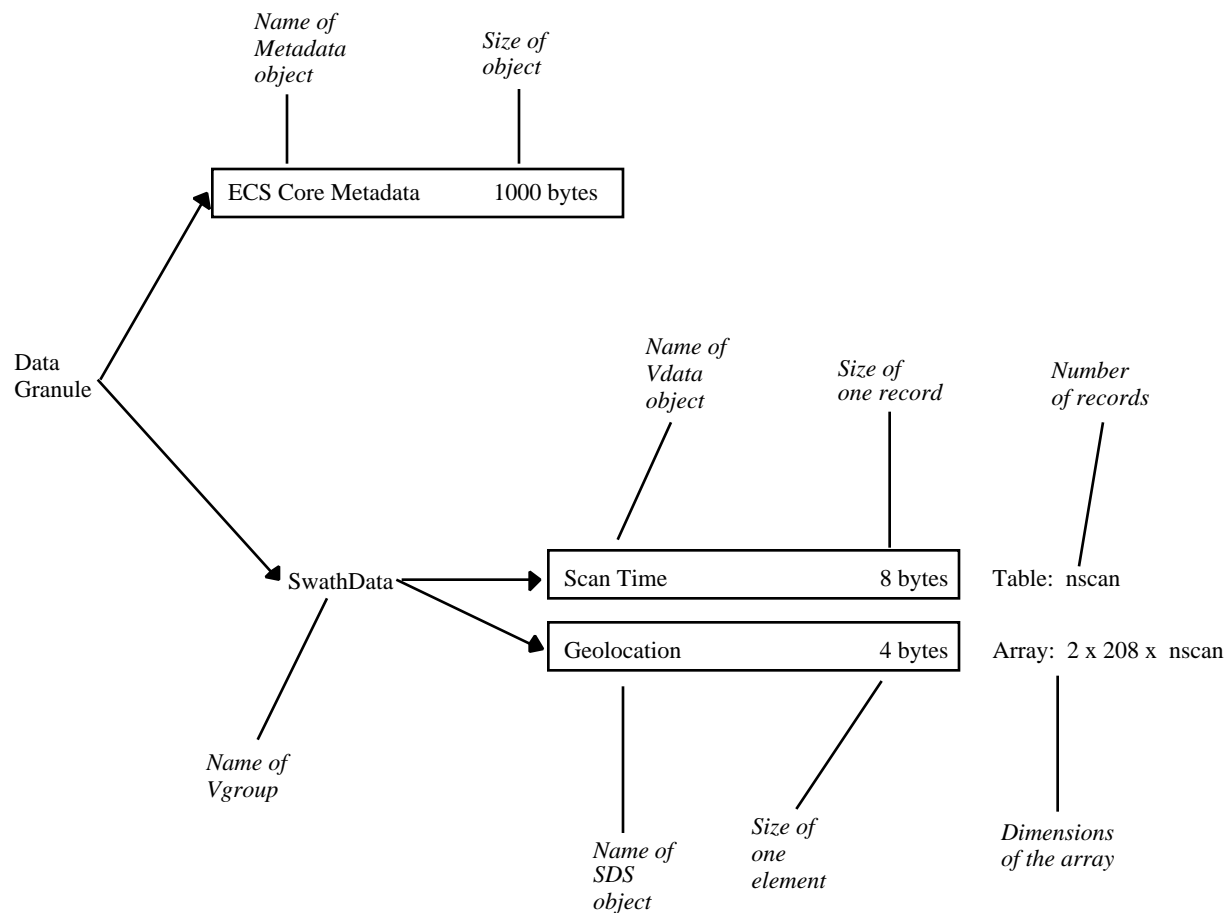


Figure 3.1-1
Example Product Structure

3.5 ORBIT AND GRANULE DEFINITION

The beginning and ending time of an orbit is defined as the time when the sub-satellite track reaches its southernmost latitude. This time is determined from the definitive ephemeris data. A scan is included in an orbit when its Scan Time is greater than or equal to the Orbit Start Time and less than the Orbit End Time. The average orbit is 91.5 minutes or 5490 seconds. The first partial orbit after launch will be orbit 1, so the first full orbit will be orbit 2.

A granule is defined as one orbit for the VIRS and PR instruments. For the TMI instrument, a granule is defined as one orbit plus an overlap before the orbit, known as the Preorbit Overlap, plus an overlap after the orbit, known as the Postorbit Overlap. The overlap size is fixed at exactly 50 scans. Since there are two overlap periods per granule, each granule will contain 100 overlap scans. See Figure 3.5-1.

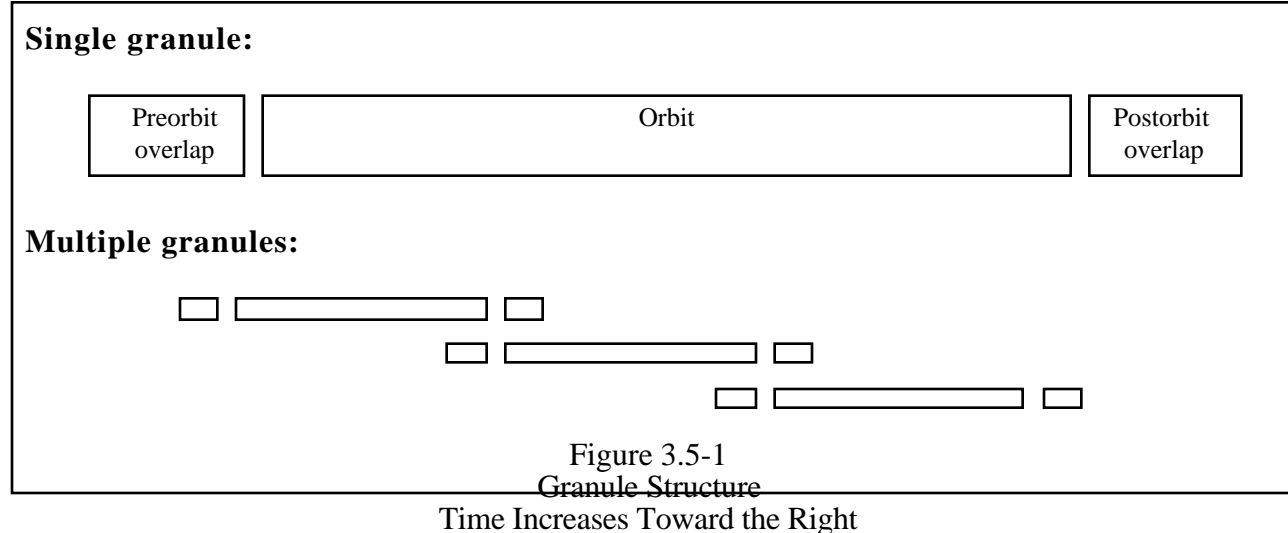

Overlaps are used to allow algorithm 2B-31 to open only one input granule in order to output one granule. The overlap is needed because 2B-31 requires both TMI and PR measurements at the same location. Since PR points at nadir and TMI points at a 49° angle off of nadir, the colocated measurements will occur around a minute apart.

The formats in this document for products with overlap (1A-11, 1B-11, and 2A-12) follow the assumption that uniformity within one granule is preferable to uniformity for the same pixel across granules. Therefore one ephemeris file and one UTCF are used in one granule. In a similar vein, the calibration is started at the beginning of the granule and reaches satisfactory values within 10 scans. The advantage of granule uniformity is that there are no discontinuities within a granule and processing has only to input one granule in order to output one granule. The disadvantage is that a pixel in one granule may have a different value, location, and time from the same pixel in another granule. When such a difference occurs, the pixel is in an overlap region in one of the granules. According to the TRMM requirements, the location and time differences will be less than 1 km and 1 ms, respectively.

In Level-1A, extra (usually one) ACS and instrument housekeeping packets are added to ensure that each science packet has an ACS and instrument housekeeping packet before and after the science packet.

3.6 SCANS IN A GRANULE

The average number of scans in a granule is shown in the structure diagrams and array dimensions as nscan. For VIRS and PR, nscan is calculated from the average number of seconds in an orbit as follows:

$$\text{NSCAN} = \text{SS} \times \text{SO}.$$

For TMI, nscan is calculated from the average number of seconds in an orbit as follows:

$$\text{NSCAN} = \text{SS} \times \text{SO} + 100, \text{ where}$$

INSTRUMENT	SCANS / SECOND (SS)	SECONDS / ORBIT (SO)	NSCAN
------------	------------------------	-------------------------	-------

TMI	31.600 / 60	5490	2991
VIRS	2 * 98.5 / 60	5490	18026
PR	1 / 0.6	5490	9150

3.7 TIME

Scan Times and Orbit Start Times are stored in the Level-1A headers, the metadata, and in the object named "Scan Time". The Orbit Start Time is determined from ephemeris data and the definition of the orbit start -- it is independent of any scans. In contrast, a Scan Time is a time associated with a scan of a particular instrument. The Scan Time is the time tag stamped on each science telemetry packet. In particular, the Orbit First Scan Time is the Scan Time of the first scan in an orbit, which occurs at or later than the Orbit Start Time. The Level-1A header stores the Universal Time Correlation Factor (UTCF) derived from the first ACS packet in the orbit. This UTCF is used to translate the Orbit Start Time from UTC to spacecraft clock time. In normal processing, the UTCF, the Scan Times in UTC, and the Scan Times in spacecraft clock time are repeated exactly in Level-1B and higher levels. In the unusual circumstance that the UTCF is found to be incorrect, a corrected UTCF will be stored in Level-1B and higher data products and a flag set to indicate that a corrected UTCF was used. When a corrected UTCF is applied, the UTC Scan Times will be different between (1) Level-1A and (2) Level-1B and higher levels, although the spacecraft clock Scan Times will be the same in Level-1A and Level-1B and higher levels. Another flag in Level-1B and higher levels shows whether a leap second occurred in the granule.

Times are expressed in five formats:

(1) UTC times in PS metadata or a Level-1A header are written in three words: Date, Time, and Milliseconds. UTC time in Core metadata is written in two words: Date and Time.

Date is a 10 character string with the following characters:

YYYY/MM/DD, where
YYYY = year,
MM = month number,
DD = day of month, and
"/" is a literal.

Time is an 8 character string with the following characters:

HH:MM:SS, where
HH = hour,
MM = minute,
SS = second, and
":" is a literal.

Milliseconds is a 3 character string with the following characters:

MMM, where
MMM = the number of milliseconds later than the last whole second.

(2) In 2A-52, UTC time is stored as in (1) except "/" is replaced by "-".

(3) In 1B-11 and 2A-12, UTC time is stored in separate words for year, month, day of month, hour, minute, and second.

(4) UTC Scan Time in the body of the data is in seconds of the day. The UTC date and time in the metadata can be combined with the Scan Time to get a complete date and time for every scan.

(5) Spacecraft clock time and UTCF have the same format, which is specified in the **TRMM Telemetry and Command Handbook**, Section 3.3.2.

Spacecraft clock time is the accumulated time count since the power-up of the clock card in the TRMM Spacecraft Data System onboard the satellite. Spacecraft time is correlated to UTC time by the UTCF. The sum of the UTCF and Spacecraft time results in a time that represents the total number of seconds since January 1, 1993 at 00:00:00 (UTC) if one assumes that each day has exactly 86400 seconds, even days with leap seconds. This total number of seconds allows easy computation of days since January 1, 1993. However, to accurately compute time differences one must use more complicated methods, which account for leap seconds. For a more thorough discussion of Spacecraft time and UTCF, see the **TRMM Telemetry and Command Handbook**, Section 3.3.2.

Scan Time is a time associated with each satellite science data scan. It is the time tag written in each science telemetry packet. There is one scan per science telemetry packet. The relationship of Scan Time to the time at each IFOV varies by instrument. A description of the relationship between Scan Time and measurement time for each of the three satellite instruments follows. In each description, T is the beginning sample time and i is the IFOV number:

(1) For TMI, the equations shown in Table 3.7-1 were obtained by personal communication with the instrument scientist.

Table 3.7-1
TMI Equations

CHANNEL	RELATIONSHIP	INDICES	SAMPLE TIME
1,2 (10 GHz)	$T = \text{Scan Time} + 59.185 \text{ ms} + (i - 1) * 6.600 \text{ ms}$	i = 1 to 104	6.304 ms
3,4,5 (19 , 21, GHz)	$T = \text{Scan Time} + 125.544 \text{ ms} + (i - 1) * 6.600 \text{ ms}$	i = 1 to 104	6.266 ms
6, 7 (37 GHz)	$T = \text{Scan Time} + 125.544 \text{ ms} + (i - 1) * 6.600 \text{ ms}$	i = 1 to 104	6.304 ms
8, 9 (85 GHz)	$T = \text{Scan Time} + 125.544 \text{ ms} + 1.650 \text{ ms} + (i - 1) * 3.300 \text{ ms}$	i = 1 to 208	3.004 ms

(2) For VIRS, the following equation was derived from a viewgraph produced at Hughes and presented by Bruce Love on January 20, 1995:

$$T = \text{Scan Time} + 107.6 \text{ ms} + (\text{OFFSET} + (i - 1)) * \text{Sample Time},$$

where i = 1, 261,
Sample Time = 0.29157 ms,
and OFFSET values are shown in Table 3.7-2.

Table 3.7-2
OFFSET Values

CHANNEL	OFFSET
1	0
4	2
5	4
3	6

2	8
---	---

The value of Sample Time was derived from the viewgraph using the time of the starting and ending channel 1 science data as follows:

$$\text{Sample Time} = (183.7 \text{ ms} - 107.6 \text{ ms}) / 261$$

(3) For PR, the information was obtained by personal communication with a representative of NASDA at the TSDIS PDR. Note that the PR Scan Time occurs after the science data are measured. In contrast, the TMI and VIRS Scan Time occur before the science data are measured.

$$T = \text{Scan Time} - 550 \text{ ms} + (i - 1) * 11.224 \text{ ms},$$

where $i = 1$ to 49

3.8 QAC ERROR TYPE

This 1 byte of error information is produced at SDPF only for each packet for which an anomaly is detected. This byte contains 8 fields, shown in Table 3.8-1, each of which is a flag.

Table 3.8-1
Error Fields

Bit	Error Type
0	Not used
1	RS header errors
2	Data unit length code wrong
3	RS frame errors
4	CRC frame errors
5	Data unit sequence count error/discontinuity
6	Detected frame errors during the generation of this data unit
7	Data unit contains fill data


A complete description is found in the **Interface Control Document Between the SDPF and the TRMM Consumers.**

4. TRMM MICROWAVE IMAGER (TMI)

4.1 INSTRUMENT AND SCAN GEOMETRY

The TRMM Microwave Imager (TMI) is one of 5 instruments flown on the TRMM satellite. TMI is similar to the SSM/I instrument flown on the DMSP satellites with several key differences: (1) the addition of vertically and horizontally polarized 10 GHz channels, (2) the scan geometry is the same for every scan instead of alternating between an A scan and a B scan, and (3) there are about twice as many pixels per scan.

The TMI is a 9 channel, 5 frequency, linearly polarized, passive microwave radiometric system. The instrument measures atmospheric and surface brightness temperatures at 10.7, 19.4, 21.3, 37.0, and 85.5 GHz. Each frequency has one vertically (V) and one horizontally (H) polarized channel, except for the 21.3 GHz frequency, which has only vertical polarization. The 10.7, 19.4, 21.3, and 37.0 GHz channels are considered low resolution and the 85.5 GHz channels are considered high resolution. TMI has a conical scanning geometry, rotating continuously about a vertical axis, receiving upwelling radiation from 49° off nadir. Scene radiation is recorded from left to right (from the point of view of the spacecraft) over an annular sector of 130° about the sub-satellite track. The swath width is 758.5 km, covered by 104 low resolution pixels or 208 high resolution pixels. A complete description of the TMI instrument is available in the **TMI Technical Description Document**. Figure 4.1-1 shows a simplified version of the scan geometry for two scans. The centers of pixels 1, 3, 5, ... of the high resolution channels (unshaded circles) are collocated with the centers of pixels 1, 2, 3, ... of the low resolution channels (shaded circles).

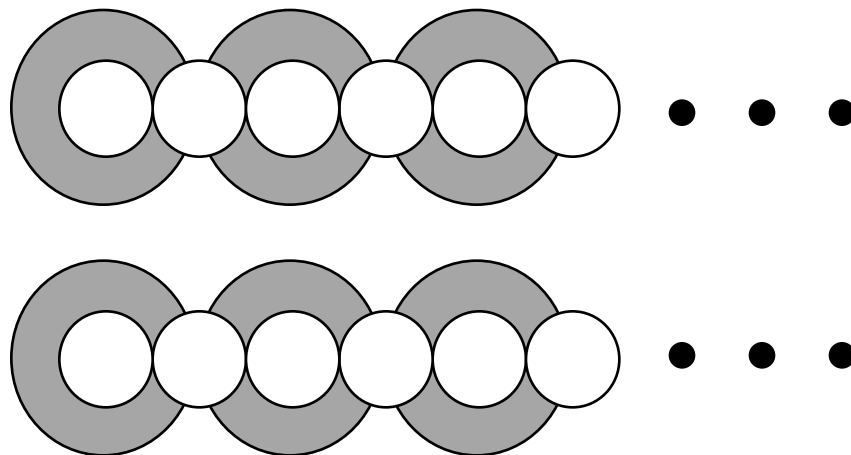

Low resolution channels appear as shaded circles. High resolution channels appear as open circles in front of the shaded circles. The dots indicate continuation.

Figure 4.1-1
TMI Scan Geometry

4.2 DESIGN CONSIDERATIONS

The TMI formats for the Level-1A and Level-1B products were designed in consultation with Dr. James Shiue (the TMI instrument scientist), Dr. Christian Kummerow (a TMI algorithm scientist), and Mr. Ted Meyer, Mr. Doug Ilg and Dr. Brand Fortner (of EOSDIS). The Level-1A format was

designed to minimize processing time and storage volume and to clearly demonstrate reversibility to Level-0. For a discussion of reversibility, see Appendix C. The Level-1A product is a simple concatenation of Level-0 data with a Header Record, which could easily be reversed back to Level-0. Level-1A remains in a binary format and is not in HDF. A detailed description of the Level-1A components is provided in Section 4.3.

The Level-1B format groups like data together. For example, high resolution channel data are in one object rather than, for example, channel, geolocation, and calibration data being interleaved in one object. The Level-1B format includes navigation and calibration information, which was requested by the instrument scientist for purposes of checking the calibration and navigation. Topographic data are not included in Level-1B design at the request of Dr. Kummerow to save disk space. A topographic data base will be provided which users of TSDIS may access. The Surface Type is also not included at the request of Dr. Kummerow since users would have different definitions of Surface Type. The Spacecraft Position and Velocity data are represented in 4-byte floating point precision. Spacecraft Geocentric Position should be represented to 10m accuracy, which equates to 6 significant digits since the earth's radius is about 6,370,000 m. Satellite Local Zenith angle is given for every twentieth high resolution pixel to save disk space. Considerations were given to two existing formats, the "Wentz" format and the MSFC format, both currently used for SSM/I data. The TMI Level-1B format is presented in a Swath Structure and formatted in HDF.

Wentz vs TSDIS format

The Level-1B format is based on the Wentz format, which is described in **User's Manual SSM/I Antenna Temperature Tapes** by Frank J. Wentz of Remote Sensing Systems, published in 1988. Since the Wentz format packs most elements, the scales and biases are listed in the **User's Manual**. The TSDIS format only packs a few elements, whose scales are included in the description of the element. Table 4.2-1 provides a mapping between the Wentz format and the corresponding elements in the TSDIS Level-1B format. Some of the differences in format are due to the difference in scanning geometry between SSM/I and TMI: SSM/I alternates between an A-scan and B-scan, but TMI has only one type of scan. Any references to B-scan by the Wentz format are omitted in the TSDIS format.

MSFC Data

The Pathfinder Daily Antenna Temperature Files archived at MSFC were examined as a possible model for the TSDIS format but not used because their format does not use EOSDIS metadata, and has an unusual way to pack orbits into arrays. Row one of an array contains scan one for the orbit one, then a delimiter, then scan one for orbit two, then a delimiter, and so on for all the orbits in a day. Succeeding rows each contain one particular scan for all of the orbits.

Table 4.2-1
Comparison of Wentz with TSDIS Format

Wentz Element	TSDIS Element
integer time for scan from beginning of 1987	Scan Time
orbit number	Fractional Orbit Number (in Scan Status). The orbit start is defined in Section 3 and is different from the orbit start used in the Wentz format.
time of spacecraft ephemeris	(omitted since ephemeris will be interpolated to the Scan Time)
geodetic latitude of spacecraft ephemeris	Spacecraft Geodetic Position (in Navigation)
fractional time for scan from beginning of 1987	Scan Time
east longitude of spacecraft ephemeris	Spacecraft Geodetic Position (in Navigation)
altitude of spacecraft ephemeris	Spacecraft Geodetic Position (in Navigation)
hot load temperature sensors	Hot Load Temperature (in Calibration)
reference voltages	Hot Load Bridge Reference (in Calibration)
r.f. mixer temperature sensor	(omitted, after discussing with the instrument scientist, Dr. James Shiue, who knows of no algorithm using this information.)
forward radiator temperature sensor	(omitted, after discussing with the instrument scientist, Dr. James Shiue, who knows of no algorithm using this information)
automatic gain control readings for A-scan	Automatic Gain Control (in Calibration)
counts-to- T_A conversion coefficients	Calibration Coefficients (in Calibration)
cold counts for A-scan	Cold Counts (in Calibration Counts)
hot counts for A-scan	Hot Counts (in Calibration Counts)
automatic gain control readings for B-scan	(omitted since there is no B-scan)
cold counts for B-scan	(omitted since there is no B-scan)
hot counts for B-scan	(omitted since there is no B-scan)
geodetic latitudes for A-scan	Geolocation
east longitudes for A-scan	Geolocation
B-scan minus A-scan latitude/longitude differences	(omitted since there is no B-scan)
19, 22, 37 Ghz T_A 's and surface-type	Low Resolution Channels (for the T_A 's) (surface-type is omitted, after discussion with the algorithm scientist Dr. Christian Kummerow, under the assumptions that the user will use the geolocation information and a surface type data base if surface type is desired and radiometrically derived surface type such as ice are beyond the scope of Level 1B processing)
85 Ghz T_A	High Resolution Channels

4.3 LEVEL-1A

The Level-1A product consists of two files: the Level-1A Product file and the SFDU header file. The Level-1A Product file, "1A-11," is a concatenation of Header record, Spacecraft Attitude packets, TMI Housekeeping packets, TMI Science Data packets, QACs and an MDUL. The SFDU header is a separate file whose format is specified in the **Interface Control Document Between EOSDIS Core System (ECS) and TRMM Science Data and Information System (TSDIS) for the ECS Project**. The data granule size is discussed in section 3. Sizing parameters used are:

nsec = the number of seconds in an average granule (includes the seconds in an orbit plus the seconds for 100 scans of overlap) = 5680. Table 4.3-1 describes 1A-11.

Table 4.3-1
Description of 1A-11

Name	Size	Description
Header	184 bytes	The Header contains information about the size of components of Level-1A file. A description of Header is provided in Table 4.3-2.
Spacecraft Attitude Packets	70 bytes * nsec / 0.5	The Spacecraft Attitude is contained in the ACS Ancillary Packet (APID # 45), whose packet size is 70 bytes and is recorded every 0.5s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of the Spacecraft Attitude Packet.
ACS QAC	0 - (5 bytes * nsec / 0.5)	Quality and Accounting Capsules for the ACS Ancillary Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 3 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3 3. Granule Packet Counter (2 bytes)
TMI Housekeeping Packets	80 bytes * nsec / 18.9873	The TMI Housekeeping (APID # 47) packet size is 80 bytes and is recorded every 18.9873s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of the TMI Housekeeping Packet.
HK QAC	0 - (5 bytes * nsec / 18.9873)	Quality and Accounting Capsules for the TMI Housekeeping Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 3 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3 3. Granule Packet Counter (2 bytes)
TMI Science Data Packets	2006 bytes * nsec / 1.89873	The TMI Science Data (APID # 52) Packet size is 2006 bytes and is recorded every 1.89873s. The TMI Science Data Packet contains calibration and scene data. Refer to the TRMM Telemetry and Command Handbook for a detailed description of the TMI Science Data Packet.

Table 4.3-1 (continued)
Description of 1A-11

Name	Size	Description
Science QAC	0 - (5 bytes * nsec / 1.89873)	Quality and Accounting Capsules for the TMI Science Data Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 3 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3 3. Granule Packet Counter (2 bytes)
Science Packets MDUL	0 - (0.5 * 6 byte * nsec / 1.89873)	Missing Data Unit List. The expected number of missing data units is zero. MDUL is only supplied with science data. There are 3 subfields in the MDUL: 1. The Source Data Unit Sequence Count of the first missing packet in a sequence of missing packets (2 bytes). 2. The Source Data Unit Sequence Count of the last missing packet in a sequence of missing packets (2 bytes). 3. The Granule Packet Counter of the last valid packet before the sequence of missing packets (2 bytes).

Table 4.3-2
Description of 1A-11 Header

Number of bytes	Type	Description
4	Character	“TMI ”
4	Integer	Orbit number
12	Character	TSDIS granule ID for the ephemeris file. The format is EPHEM.YYMMDD, where YY is year, MM is month, and DD is day of the month.
10	Character	Orbit Start UTC Date in the format described in section 3
8	Character	Orbit Start UTC Time in the format described in section 3
3	Character	Orbit Start UTC Milliseconds in the format described in section 3
8	**	Orbit Start Spacecraft Time
10	Character	Orbit End UTC Date in the format described in section 3
8	Character	Orbit End UTC Time in the format described in section 3
3	Character	Orbit End UTC Milliseconds in the format described in section 3
8	**	Orbit End Spacecraft Time
10	Character	Orbit First Scan UTC Date in the format described in section 3
8	Character	Orbit First Scan UTC Time in the format described in section 3
3	Character	Orbit First Scan UTC Milliseconds in the format described in section 3
8	**	Orbit First Scan Spacecraft Time
10	Character	Orbit Last Scan UTC Date in the format described in section 3
8	Character	Orbit Last Scan UTC Time in the format described in section 3
3	Character	Orbit Last Scan UTC Milliseconds in the format described in section 3
8	**	Orbit Last Scan Spacecraft Time
8	**	UTCF from the first ACS ancillary packet after Orbit Start Time
4	Integer	Number of scans in the Preorbit overlap
4	Integer	Number of scans in the Orbit
4	Integer	Number of scans in the Postorbit overlap
4	Integer	Number of bytes of Spacecraft Attitude
4	Integer	Number of bytes of ACS QAC
4	Integer	Number of bytes of TMI Housekeeping
4	Integer	Number of bytes of HK QAC
4	Integer	Number of bytes of TMI Science Data
4	Integer	Number of bytes of Science QAC
4	Integer	Number of bytes of Science MDUL

** Spacecraft Time format described in the **TRMM Telemetry and Command Handbook**, section 3.3.2

4.4 INSTRUMENT ANALYSIS PRODUCTS

Instrument Analysis Data and Instrument Analysis Report are intermediate products that are by-products of the Level-1B processing. These products will be made available only to the instrument scientist to assess the health of the TMI. Since these products are not sent to EOSDIS, the format is not specified in this document.

4.5 LEVEL-1B

The TMI Level 1B Product, 1B-11, "TMI Brightness Temperatures," is formatted in HDF. The following sizing parameter is used in describing these formats:

- nscan = the number of scans within one granule = 2991

4.5.1 Structure

Figure 4.5.1-1 shows the structure of the TMI Level-1B product in terms of the component objects and their sizes. The TMI Level-1B product is stored as a swath structure (see section 3).

4.5.2 Contents

ECS Core Metadata (Attribute, 10,000-byte character):
ECS Core Metadata are those metadata defined by ECS as Core metadata.
See Appendix A.

PS Metadata (Attribute, 10,000-byte character):
Product Specific Metadata are metadata defined by and specific to TSDIS.
See Appendix B.

SwathStructure (Attribute, 5,000-byte character):
SwathStructure gives the specification of the swath geometry. See Section 2.

Scan Time (Vdata Table, record size 8 bytes, nscan records):
See the following, Table 4.5.2-1.

Table 4.5.2-1
Scan Time
(Vdata Table, record size 8 bytes, nscan records)

Name	Format	Description
Year	1-byte integer	2-digit year, e.g., 98 for 1998 or 0 for 2000
Month	1-byte integer	The month of the Year
Day of Month	1-byte integer	The day of the Month
Hour	1-byte integer	The hour (UTC) of the Day
Minute	1-byte integer	The minute of the Hour
Second	1-byte integer	The second of the Minute
Day of Year	2-byte integer	The day of the Year

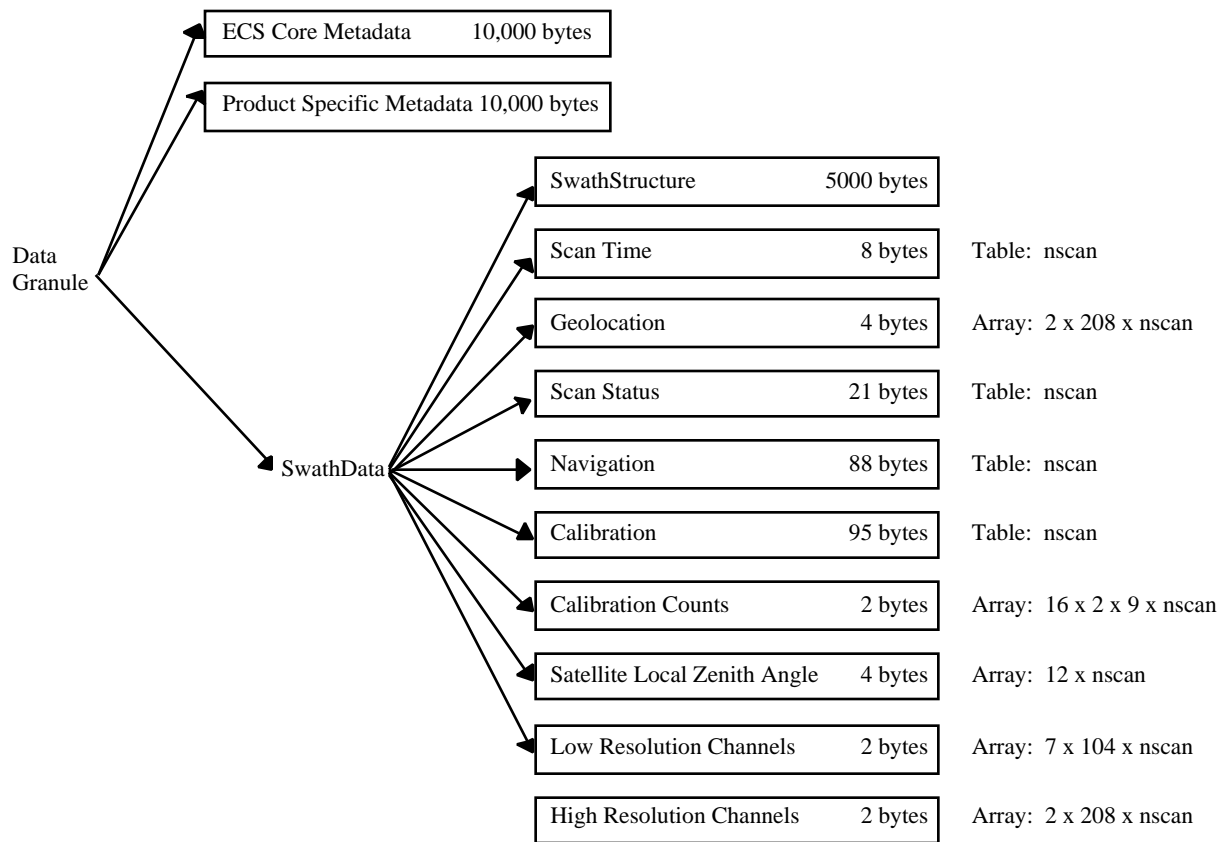


Figure 4.5.1-1
TMI Level-1B Structure

Geolocation (SDS, array size 2 x 208 x nscan, 4-byte float):

The earth location of the center of the IFOV of the high resolution (85 GHz) channels (channels 8 and 9) at the altitude of the earth ellipsoid. The first dimension is latitude and longitude, in that order. The next dimensions are high resolution pixel and scan. Values are represented as floating point decimal degrees. Off-earth is represented as less than or equal to -9999.9 Latitude is positive north, negative south. Longitude is positive east, negative west. A point on the 180th meridian is assigned to the western hemisphere.

Scan Status (Vdata, record size 21 bytes, nscan records):

The status of each scan is represented in terms of quality, platform and instrument control data, and fractional orbit number are shown in Table 4.5.2-2.

Navigation (Vdata, record size 88 bytes, nscan records):

See Appendix D.

Calibration (Vdata Table, record size 95 bytes, nscan records):

See the following, Table 4.5.2-3.

Table 4.5.2-2
Scan Status
(Vdata, record size 21 bytes, nscan records)

Name	Format	Description
Missing	1-byte integer	Missing indicates whether information is contained in the scan data. The values are: 0 Scan data elements contain information 1 Scan was missing in the telemetry data 2 Scan data contains no elements with rain
Validity	1-byte integer	Validity is a summary of status modes. If all status modes are routine, all bits in Validity = 0. Routine means that scan data has been measured in the normal operational situation as far as the status modes are concerned. Validity does not assess data or geolocation quality. Validity is broken into 8 bit flags. Each bit = 0 if the status is routine but the bit = 1 if the status is not routine. The non-routine situations follow: Bit Meaning if bit = 1 0 Spare (always 0) 1 Non-routine spacecraft orientation (2 or 3) 2 Non-routine ACS mode (other than 4) 3 Non-routine yaw update status (0 or 1) 4 Non-routine instrument status (Bit 0 = 1 or bit 1 = 1) 5 Non-routine QAC (non-zero) 6 Spare (always 0) 7 Spare (always 0)
QAC	1-byte integer	The Quality and Accounting Capsule of the Science packet as it appears in Level-0 data. If no QAC is given in Level-0, which means no decoding errors occurred, QAC in this format has a value of zero.

Table 4.5.2-2 (continued)

Scan Status
(Vdata, record size 21 bytes, nscan records)

Name	Format	Description
Geolocation Quality	1-byte integer	<p>Geolocation Quality is broken into 8 bit flags. Each bit = 0 if the status is good but the bit = 1 if the status is bad. Each bit flag is listed below, arranged in approximate descending order of severity:</p> <p>Bit Meaning if bit = 1</p> <p>0 Very bad geolocation results: Latitudes, longitudes, or other parameters out of bounds, or scan missed Earth (excluding CERES deep-sky calibration mode)</p> <p>1 Lat/lon do not vary smoothly from scan to scan. Details TBD. Indicates problem with either current or previous scan, but cannot discriminate between them.</p> <p>2 The difference between the roll/pitch/yaw in consecutive ACS packets was greater than TBD range.</p> <p>3 Roll/pitch/yaw out of normal range. Range TBD.</p> <p>4 Satellite undergoing maneuvers. (Geolocation is less accurate during maneuvers.)</p> <p>5 Questionable Ephemeris or questionable UTCF, including use of predicted ephemeris for quicklook.</p> <p>6 Geolocation calculations failed. Flags whether initialization failed, or whether geolocation processing failed, due to, e.g., error in allocating memory.</p> <p>7 Geolocation quality control not be carried out (e.g., due to error in initialization of QA parameters or failure to write QA verification intermediate product).</p>
Data Quality [9]	9 X 1-byte integer	The Quality of Channel Data for a given channel on a given scan line is the percentage of pixels whose values are within the acceptable range listed in the Metadata. Quality is given for each channel in the order of the channel number.
Current Spacecraft Orientation	1-byte integer	<p>Value Meaning</p> <p>0 +x forward</p> <p>1 -x forward</p> <p>2 -y forward</p> <p>3 Inertial - CERES Calibration</p> <p>4 Unknown Orientation</p>
Current ACS Mode	1-byte integer	<p>Value Meaning</p> <p>0 Standby</p> <p>1 Sun Acquire</p> <p>2 Earth Acquire</p> <p>3 Yaw Acquire</p> <p>4 Nominal</p> <p>5 Yaw Maneuver</p> <p>6 Delta-H (Thruster)</p> <p>7 Delta-V (Thruster)</p> <p>8 CERES Calibration</p>
Yaw Update Status	1-byte integer	<p>Value Meaning</p> <p>0 Inaccurate</p> <p>1 Indeterminate</p> <p>2 Accurate</p>

Table 4.5.2-2 (continued)
Scan Status
(Vdata, record size 21 bytes, nscan records)

Name	Format	Description	
TMI Instrument Status	1-byte integer	Bit	Meaning
		00	Receiver Status (1=ON, 0=OFF)
		01	Spin-up Status (1=ON, 0=OFF)
		02	Spare Command 1 Status
		03	Spare Command 2 Status
		04	1 Hz Clock Select (1=A, 0=B)
		05	Spare Command 3 Status
		06	Spare Command 4 Status
		07	Spare Command 5 Status
Fractional Orbit Number	4-byte float	The orbit number and fractional part of the orbit at Scan Time. The orbit number will be counted from the beginning of the mission. The fractional part is calculated as: (Time - Orbit Start Time) / (Orbit End Time - Orbit Start Time)	

Table 4.5.2.-3
Calibration
(Vdata Table, record size 95 bytes, nscan records)

Name	Format	Description
Hot Load Temperature [3]	3 X 2-byte integer	The physical temperatures, in degrees Kelvin, for the 3 temperature sensors attached to the hot load multiplied by 100 and stored as an integer. Range: 0 to 400 K.
Hot Load Bridge Reference Positive Bridge Voltage	2-byte integer	The positive bridge voltage of the hot load bridge reference. Range: 0 to 4095.
Hot Load Bridge Reference Near Zero Voltage	2-byte integer	The near zero voltage of the hot load bridge reference. Range: 0 to 4095.
85 Ghz Temperature	2-byte integer	The receiver shelf temperature of the 85 Ghz channel multiplied by 100 and stored as an integer. Range: 0 to 400K.
Top Radiator Temperature	2-byte integer	The temperature of the top of the radiator channel multiplied by 100 and stored as an integer. Range: 0 to 400K.
Automatic Gain Control [9]	9 X 1-byte integer	Automatic gain control for the 9 channels in counts. Range: 0 to 15.
Calibration Coefficient A [9]	9 X 4-byte float	<p>Calibration coefficient A (degrees Kelvin / counts) for the 9 channels. Coefficient A for each channel is used in the following equation to convert counts, C, to antenna temperature, T_A:</p> $T_A = A C + B$
Calibration Coefficient B [9]	9 X 4-byte float	<p>Calibration coefficient B (degrees Kelvin / counts) for the 9 channels. Coefficient B for each channel is used in the following equation to convert counts, C, to antenna temperature, T_A:</p> $T_A = A C + B$

Calibration Counts (SDS, array size 16 x 2 x 9 x nscan, 2-byte integer):

Calibration measurements, in counts. The dimensions are: samples, load, channel, and scan. The sample dimension has a maximum of 16. The load dimension has first cold sky and then hot load. The low resolution channels (1-7) have 8 samples (the remaining 8 elements in the array are not used for each low resolution channel) and the high resolution channels (8 - 9) have 16 samples.

Satellite Local Zenith Angle (SDS, array size 12 x nscan, 4-byte float):

The angle, in degrees, between the local pixel geodetic zenith and the direction to the satellite. This angle is given for every twentieth high resolution pixel along a scan: pixel 1, 21, 41, ... , 201, 208. For the pixel dimension, Offset = 0 and Increment = -20.

Low Resolution Channels (SDS, array size 7 x 104 x nscan, 2-byte integer):

Brightness temperature (K) reduced by 100 K, multiplied by 100, and stored as a 2-byte integer, i.e.

$$\text{Stored value} = (T - 100 \text{ K}) * 100$$

The dimensions are: channel, pixel, scan. The pixel dimension has Offset = 0 and Increment = -2. The data range is 100 K to 375 K. The channels shown in Table 4.5.2-4 are included.

Table 4.5.2-4
Low Resolution Channels
(SDS, array size 7 x 104 x nscan, 2-byte integer)

Channel	Frequency	Polarization
1	10 GHz	Vertical
2	10 GHz	Horizontal
3	19 GHz	Vertical
4	19 GHz	Horizontal
5	21 GHz	Vertical
6	37 GHz	Vertical
7	37 GHz	Horizontal

High Resolution Channels (SDS, array size 2 x 208 x nscan, 2-byte integer):

Brightness temperature (K) reduced by 100 K, multiplied by 100, and stored as a 2-byte integer, i.e.

$$\text{Stored value} = (T - 100 \text{ K}) * 100$$

The dimensions are: channel, pixel, scan. The data range is 100 K to 375 K. The following channels are included:

Table 4.5.2-5
High Resolution Channels
(SDS, array size 2 x 208 x nscan, 2-byte integer)

Channel	Frequency	Polarization
8	85 GHz	Vertical
9	85 GHz	Horizontal

5. VISIBLE AND INFRARED SCANNER (VIRS)

5.1 INSTRUMENT AND SCAN GEOMETRY

The Visible and Infrared Scanner (VIRS) sensor is one of the five instruments on the Tropical Rainfall Measurement Mission (TRMM) satellite. The VIRS instrument has a swath width of 720 km and a horizontal resolution of 2 km at nadir. VIRS is similar to the Advanced Very High Resolution Radiometer (AVHRR) now in operation on polar-orbital environmental satellites.

The VIRS measures radiance values in the channels shown in the Table 5.1-1. All five Channels will be in operation during daytime, but only Channels 3, 4 and 5 are in operation during nighttime. The AVHRR is a cross-track scanning system and records scene radiation from left to right over a scan angle of $\pm 45^\circ$ from the nadir (subpoint view). The swath width of 720 km is covered by 261 pixels and every scan has the same geometry. The Level-1B product stores radiance for every pixel measured.

Table 5.1-1
Channels where VIRS Measures Radiance Values

Channel	Spectral Region	Wavelength (μm)
1	Visible	0.63
2	Near Infrared	1.6
3	Near Infrared	3.75
4	Infrared	10.8
5	Infrared	12.0

5.2 DESIGN CONSIDERATIONS

The VIRS formats for the Level-1A and Level-1B products were designed in consultation with Dr. William Barnes (VIRS Instrument Scientist), Mr. Ted Meyer, Mr. Doug Ilg and Dr. Brand Fortner (of EOSDIS). The Level-1A format was designed to minimize processing time and storage volume and to clearly demonstrate reversibility to Level-0. The Level-1A product is a simple concatenation of Level-0 data with a Header, which could easily be reversed back to Level-0. For a discussion of reversibility, see Appendix C. Level-1A remains in a binary format and is not in HDF. A detailed description of the Level-1A components is provided in Section 5.3.

The Level-1B format groups like data together. For example, channel data are in one object rather than, for example, channel, geolocation, and calibration data being interleaved in one object. The Level-1B format includes navigation and calibration information, which was requested by Dr. Barnes. The Satellite and Solar Local Direction are supplied for every tenth pixel in a scan line to save space. Spacecraft Position and Velocity data are represented in 4-byte floating point precision. Spacecraft Geocentric Position is represented to 10m accuracy, which equates to 6 significant digits since the earth's radius is about 6,370,000 m. Data elements are based on the NOAA AVHRR format. The VIRS Level-1B format is presented in a Swath Structure and formatted in HDF

5.3 LEVEL-1A

The Level-1A product consists of two files: the Level-1A Product file and the SFDU header file. The Level-1A Product file, "1A-01," is a concatenation of Header record, Spacecraft Attitude packets, VIRS Housekeeping Data packets, VIRS Science Data packets, QACs, and an MDUL. The SFDU header is a separate file whose format is specified in the **Interface Control**

Document Between EOSDIS Core System (ECS) and TRMM Science Data and Information System (TSDIS) for the ECS Project. The data granule size is discussed in section 3. Sizing parameters used are:

nsec = the number of seconds in a granule = 5490. Table 5.3-1 describes 1A-01.

Table 5.3-1
Description of 1A-01

Name	Size	Description
Header	204 bytes	The Header contains Information about the components of Level-1A file. A description of Header is described in Table 5.3-2.
Spacecraft Attitude Packets	70 bytes * nsec / 0.5	The Spacecraft Attitude is contained in the ACS Ancillary Packet (APID # 45), whose packet size is 70 bytes and is recorded every 0.5s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of the Spacecraft Attitude Packet.
ACS QAC	0 - (5 bytes * nsec / 0.5)	Quality and Accounting Capsules for the ACS Ancillary Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 3 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3 3. Granule Packet Counter (2 bytes)
VIRS Housekeeping Packets	110 bytes * nsec / 10	The VIRS Housekeeping (APID # 46) packet size is 110 bytes and is recorded every 10.00s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of the VIRS Housekeeping Packet.
HK QAC	0 - (5 bytes * nsec / 10)	Quality and Accounting Capsules for the VIRS Housekeeping Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 3 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3 3. Granule Packet Counter (2 bytes)

Table 5.3-1 (continued)
Description of 1A-01

Name	Size	Description
VIRS Science Data Packets	[1892 bytes * (91.5-15) / 91.5 + 1110 bytes * 15/91.5] * nsec / 0.3045685	The VIRS Science Data Packet (APID # 51) contains calibration, scene, and housekeeping information and is recorded every 0.3045685s. The daytime mode packet size is 1892 bytes and the nighttime mode packet size is 1110 bytes. On the average, VIRS would spend 15 minutes out of 91.5 minutes per orbit in the nighttime mode. However, the fraction of packets that are nighttime is determined by the instrument scientist and may change. The packets in a single orbit may divide into 2, 3, or 4 sections, with each section containing a continuous sequence of packets with only one mode. Most orbits will divide into 2 sections, but some orbits will divide into 3 or even 4 sections. The header in Table 5.3-2 stores the sizes of each section separately for easier access to the data. Refer to the TRMM Telemetry and Command Handbook for a detailed description of the VIRS Science Packets.
Science QAC	0 - (5 bytes * nsec / 0.3045685)	Quality and Accounting Capsules for the VIRS Science Data Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 3 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3 3. Granule Packet Counter (2 bytes)
Science Packets MDUL	0 - (0.5 * 6 byte * nsec / 0.3045685)	Missing Data Unit List. The expected number of missing data units is zero. MDUL is only supplied with science data. There are 3 subfields in the MDUL: 1. The Source Data Unit Sequence Count of the first missing packet in a sequence of missing packets (2 bytes). 2. The Source Data Unit Sequence Count of the last missing packet in a sequence of missing packets (2 bytes). 3. The Granule Packet Counter of the last valid packet before the sequence of missing packets (2 bytes).

Table 5.3-2
Description of 1A-01 Header

Number of bytes	Type	Description
4	Character	“VIRS”
4	Integer	Orbit number
12	Character	TSDIS granule ID for the ephemeris file. The format is EPHEM.YYMMDD, where YY is year, MM is month, and DD is day of the month.
10	Character	Orbit Start UTC Date in the format described in section 3
8	Character	Orbit Start UTC Time in the format described in section 3
3	Character	Orbit Start UTC Milliseconds in the format described in section 3
8	**	Orbit Start Spacecraft Time
10	Character	Orbit End UTC Date in the format described in section 3
8	Character	Orbit End UTC Time in the format described in section 3
3	Character	Orbit End UTC Milliseconds in the format described in section 3
8	**	Orbit End Spacecraft Time
10	Character	Orbit First Scan UTC Date in the format described in section 3
8	Character	Orbit First Scan UTC Time in the format described in section 3
3	Character	Orbit First Scan UTC Milliseconds in the format described in section 3

Table 5.3-2 (continued)
Description of 1A-01 Header

Number of bytes	Type	Description
8	**	Orbit First Scan Spacecraft Time
10	Character	Orbit Last Scan UTC Date in the format described in section 3
8	Character	Orbit Last Scan UTC Time in the format described in section 3
3	Character	Orbit Last Scan UTC Milliseconds in the format described in section 3
8	**	Orbit Last Scan Spacecraft Time
8	**	UTCF from the first ACS ancillary packet after Orbit Start Time
4	Integer	Number of scans in the Orbit
4	Integer	Number of bytes of Spacecraft Attitude
4	Integer	Number of bytes of ACS QAC
4	Integer	Number of bytes of VIRS Housekeeping
4	Integer	Number of bytes of HK QAC
4	Integer	Number of bytes of Science Data-Section 1
4	Integer	Type of Science Data-Section 1 0 = no data 1 = daytime mode 2 = nighttime mode
4	Integer	Number of bytes of Science Data-Section 2
4	Integer	Type of Science Data-Section 2
4	Integer	Number of bytes of Science Data-Section 3
4	Integer	Type of Science Data-Section 3
4	Integer	Number of bytes of Science Data-Section 4
4	Integer	Type of Science Data-Section 4
4	Integer	Number of bytes of Science QAC
4	Integer	Number of bytes of Science MDUL

** Spacecraft Time format described in the **TRMM Telemetry and Command Handbook**, Section 3.3.2

5.4 INSTRUMENT ANALYSIS PRODUCTS

Instrument Analysis Data and Instrument Analysis Report are intermediate products that are by-products of the Level-1B processing. These products will be made available only to the instrument scientist to assess the health of the VIRS. Since these products are not sent to EOSDIS, the format is not specified in this document.

5.5 LEVEL-1B

The VIRS Level-1B Product, 1B-01, “VIRS Radiance”, is written in HDF. The following sizing parameter is used in describing these formats:

- nscan = the number of scans within one granule = 18026

5.5.1 Structure

Figure 5.5.1-1 shows the structure of the VIRS Level-1B product in terms of the component objects and their sizes. The VIRS Level-1B product is stored as a swath structure (see Section 3).

5.5.2 Contents

ECS Core Metadata (Attribute, 10,000-byte character):
ECS Core Metadata are those metadata defined by ECS as Core metadata.
See Appendix A.

PS Metadata (Attribute, 10,000-byte character):
Product Specific Metadata are metadata defined by and specific to TSDIS.
See Appendix B.

SwathStructure (Attribute, 5,000-byte character):
SwathStructure gives the specification of the swath geometry. See Section 2.

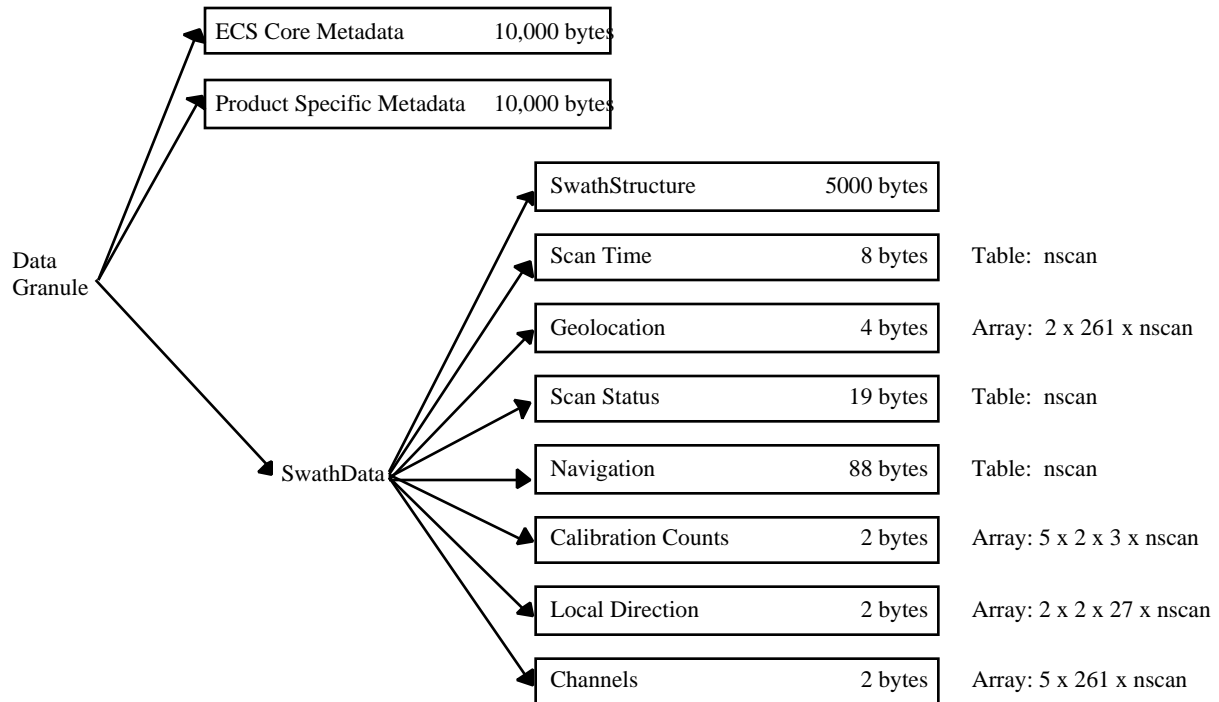


Figure 5.5.1-1
VIRS Level-1B Structure

Scan Time (Vdata Table, record size 8 bytes, nscan records):
See the following, Table 5.5.2-1.

Table 5.5.2-1
Scan Time
(Vdata Table, record size 8 bytes, nscan records)

Name	Format	Description
Scan Time	8-byte float	A time associated with the scan. The exact relationship between Scan Time and the time of each IFOV is described in Section 3. Scan Time is expressed as the UTC seconds of the day.

Geolocation (SDS, array size 2 x 261 x nscan, 4-byte float):
The earth location of the center of the IFOV at the altitude of the earth ellipsoid. The first dimension is latitude and longitude, in that order. The next dimensions are pixel and scan. Values are represented as floating point decimal degrees. Off-earth is represented as less than or equal to -9999.9. Latitude is positive north, negative south. Longitude is positive east, negative west. A point on the 180th meridian is assigned to the western hemisphere.

Scan Status (Vdata, record size 19 bytes, nscan records):
The status of each scan is represented in terms of quality, platform and instrument control data, and fractional orbit number as shown in Table 5.5.2-2.

Table 5.5.2-2
Scan Status
(Vdata, record size 19 bytes, nscan records)

Name	Format	Description
Missing	1-byte integer	Missing indicates whether information is contained in the scan data. The values are: 0 Scan data elements contain information 1 Scan was missing in the telemetry data 2 Scan data contains no elements with rain
Validity	1-byte integer	Validity is a summary of status modes. If all status modes are routine, all bits in Validity = 0. Routine means that scan data has been measured in the normal operational situation as far as the status modes are concerned. Validity does not assess data or geolocation quality. Validity is broken into 8 bit flags. Each bit = 0 if the status is routine but the bit = 1 if the status is not routine. The non-routine situations follow: Bit Meaning if bit = 1 0 Spare (always 0) 1 Non-routine spacecraft orientation (2 or 3) 2 Non-routine ACS mode (other than 4) 3 Non-routine yaw update status (0 or 1) 4 Non-routine instrument status (2) 5 Non-routine QAC (non-zero) 6 VIRS in non-mission mode (non-zero) 7 VIRS condition is abnormal (non-zero)

Table 5.5.2-2 (continued)
Scan Status
(Vdata, record size 19 bytes, nscan records)

Name	Format	Description																				
QAC	1-byte integer	The Quality and Accounting Capsule of the Science packet as it appears in Level-0 data. If no QAC is given in Level-0, which means no decoding errors occurred, QAC in this format has a value of zero.																				
Geolocation Quality	1-byte integer	<p>Geolocation Quality is broken into 8 bit flags. Each bit = 0 if the status is good but the bit = 1 if the status is bad. Each bit flag is listed below, arranged in approximate descending order of severity:</p> <p>BitMeaning if bit = 1</p> <p>0 Very bad geolocation results: Latitudes, longitudes, or other parameters out of bounds, or scan missed Earth (excluding CERES deep-sky calibration mode)</p> <p>1 Lat/lon do not vary smoothly from scan to scan. Details TBD. Indicates problem with either current or previous scan, but cannot discriminate between them.</p> <p>2 The difference between the roll/pitch/yaw in consecutive ACS packets was greater than TBD range.</p> <p>3 Roll/pitch/yaw out of normal range. Range TBD.</p> <p>4 Satellite undergoing maneuvers. (Geolocation is less accurate during maneuvers.)</p> <p>5 Questionable Ephemeris or questionable UTCF, including use of predicted ephemeris for quicklook.</p> <p>6 Geolocation calculations failed. Flags whether initialization failed, or whether geolocation processing failed, due to, e.g., error in allocating memory.</p> <p>7 Geolocation quality control not be carried out (e.g., due to error in initialization of QA parameters or failure to write QA verification intermediate product).</p>																				
Data Quality [5]	5 X 1-byte integer	The Quality of Channel Data for a given channel on a given scan line is the percentage of pixels whose values are within the acceptable range listed in the Metadata. Quality is listed for each channel in order of the channel number.																				
Current Spacecraft Orientation	1-byte integer	<table><tr><th>Value</th><th>Meaning</th></tr><tr><td>0</td><td>+x forward</td></tr><tr><td>1</td><td>-x forward</td></tr><tr><td>2</td><td>-y forward</td></tr><tr><td>3</td><td>Inertial - CERES Calibration</td></tr><tr><td>4</td><td>Unknown Orientation</td></tr></table>	Value	Meaning	0	+x forward	1	-x forward	2	-y forward	3	Inertial - CERES Calibration	4	Unknown Orientation								
Value	Meaning																					
0	+x forward																					
1	-x forward																					
2	-y forward																					
3	Inertial - CERES Calibration																					
4	Unknown Orientation																					
Current ACS Mode	1-byte integer	<table><tr><th>Value</th><th>Meaning</th></tr><tr><td>0</td><td>Standby</td></tr><tr><td>1</td><td>Sun Acquire</td></tr><tr><td>2</td><td>Earth Acquire</td></tr><tr><td>3</td><td>Yaw Acquire</td></tr><tr><td>4</td><td>Nominal</td></tr><tr><td>5</td><td>Yaw Maneuver</td></tr><tr><td>6</td><td>Delta-H (Thruster)</td></tr><tr><td>7</td><td>Delta-V (Thruster)</td></tr><tr><td>8</td><td>CERES Calibration</td></tr></table>	Value	Meaning	0	Standby	1	Sun Acquire	2	Earth Acquire	3	Yaw Acquire	4	Nominal	5	Yaw Maneuver	6	Delta-H (Thruster)	7	Delta-V (Thruster)	8	CERES Calibration
Value	Meaning																					
0	Standby																					
1	Sun Acquire																					
2	Earth Acquire																					
3	Yaw Acquire																					
4	Nominal																					
5	Yaw Maneuver																					
6	Delta-H (Thruster)																					
7	Delta-V (Thruster)																					
8	CERES Calibration																					

Table 5.5.2-2 (continued)
Scan Status
(Vdata, record size 19 bytes, nscan records)

Name	Format	Description		
Yaw Update Status	1-byte integer	Value	Meaning	
		0	Inaccurate	
		1	Indeterminate	
		2	Accurate	
VIRS Instrument Status	1-byte integer	Value	Meaning	
		0	Day (no calibration occurring)	
		1	Night	
		2	Monitor Scan Stability	
		3	Day with Calibration	
VIRS mode	1-byte integer	Value	Meaning	
		0	mission mode	
		1	safehold mode	
		2	outgas mode	
		3	activation mode	
VIRS Abnormal Conditions	1-byte integer	Bit	Value	Meaning
		0	0	normal
			1	scan phase error
		1	0	normal
			1	selftest error
		2	0	normal
			1	thermal data missing
		3	0	normal
			1	moon in space view
		4	0	not used
		5	0	not used
		6	0	not used
		7	0	not used
Fractional Orbit Number	4-byte float	The orbit number and fractional part of the orbit at Scan Time. The orbit number will be counted from the beginning of the mission. The fractional part is calculated as: (Time - Orbit Start Time) / (Orbit End Time - Orbit Start Time)		

Navigation (Vdata, record size 88 bytes, nscan records):
See Appendix D.

Calibration Counts (SDS, array size 5 x 2 x 3 x nscan, 2-byte integer):
Raw calibration counts are given in four dimensions. The first dimension is the channel number, the second dimension is the data word, the third dimension is blackbody, space view and solar diffuser, in that order, and the fourth dimension is the number of scans.

Local Direction (SDS, array size 2 x 2 x 27 x nscan, 2-byte integer):
Angles (degrees) to the satellite and sun from the IFOV pixel position on the earth are given in 4 dimensions. The first dimension is zenith and azimuth angles, in that order. The zenith angle is measured between the local pixel geodetic zenith and the direction to the satellite. The azimuth angle is measured clockwise from the local North direction around toward the local East direction. The second dimension is the object to which the directions point, namely the satellite and the sun, in that order. The third dimension is the pixel number. Angles are given only for every tenth pixel along a scan: pixel 1, 11, 21, ..., and 261. For the pixel dimension, Offset = 0 and Increment = - 10. The fourth dimension is the scan number. Angles are multiplied by 100 and stored as 2-byte integers.

Channels (SDS, array size 5 x 261 x nscan, 2-byte integer):
Scene data for the five channels, measured in Radiance ($\text{mW cm}^{-2} \mu\text{m}^{-1} \text{sr}^{-1}$) multiplied by a scale factor and stored as 2-byte integers. sr means steradian. The scale factors are 500, 1000, 100000, 10000, and 10000 for channels 1, 2, 3, 4, and 5, respectively. The three dimensions are channel, pixel, and scan. The range and accuracy for each channel is shown in Figure 5.2.2-3.

Table 5.5.2-3
VIRS Range and Accuracy

Channel	Minimum ($\text{mW cm}^{-2} \mu\text{m}^{-1} \text{sr}^{-1}$)	Maximum ($\text{mW cm}^{-2} \mu\text{m}^{-1} \text{sr}^{-1}$)	Accuracy
1	0	47	10%
2	0	7.23	10%
3	0	0.0986	2%
4	0	1.28	2%
5	0	1.15	2%

6. PRECIPITATION RADAR


6.1 INSTRUMENT AND SCAN GEOMETRY

The Precipitation Radar (PR) is one of five instruments on the Tropical Rainfall Measuring Mission (TRMM) satellite. The PR is an active 2.2 cm radar, recording energy reflected from atmospheric and surface targets. The PR electronically scans across the ground track of the satellite every 0.6 s with a swath width of 220 km.

The complex scan geometry is represented in Figure 6.1-1. Each scan contains 49 rays sampled over an angular sector of 34° . For a given ray, the satellite begins recording samples at a fixed distance from the satellite and records a certain number of samples every 125 m along the ray. The starting distance and the number of samples are different for each ray. Assuming the satellite altitude is 350 km, the sampling begins about 23 km above mean sea level and extends for a certain distance along the ray. This distance along the ray is 33.5 km at the two rays farthest from nadir, monotonically declining to 30.25 km at the two rays adjacent to nadir, and jumping to 34.75 km at the single nadir ray. The extra data in the nadir ray is known as "the mirror," because it records energy reflected not once from a target, but three times (ground to target to ground). Rays other than the nadir ray also sample "below" the surface. The purpose of this extension is "to see" below the surface to clearly detect the location of the surface.


The satellite saves data in three samples. Every other data point in the vertical is saved in the "normal sample," shown in Figure 6.1-2. Thus the normal sample has a spacing of 250 m along the ray. The mirror is contained in the normal sample. A subset of the remaining data points is saved in two oversamples: the "surface oversample" and the "rain echo oversample." Both oversamples have a spacing of 250 m along a ray, but a region with both normal sample and oversample has a spacing of 125 m. The PR determines which levels to save in the oversamples based on its on board determination of the surface bin. No data are saved as oversample in rays 1-10 and 40-49. Five levels are saved from rays 11-39 in the surface oversample. If the PR detects the surface in an oversample bin, the surface oversample is centered on the detected surface. If, on the other hand, the PR detects the surface in a normal sample bin, 3 oversample bins are above and 2 oversample bins are below the detected surface. In addition, 28 levels (immediately above the surface oversample) are saved from rays 20-30 in the rain echo oversample.

NASDA defines a range bin number, which is related to distance from the satellite along the ray. It is 1 at 327 km from the satellite, increments by 1 every 125 m, and increases to a maximum of 400 at 376.875 km from the satellite.

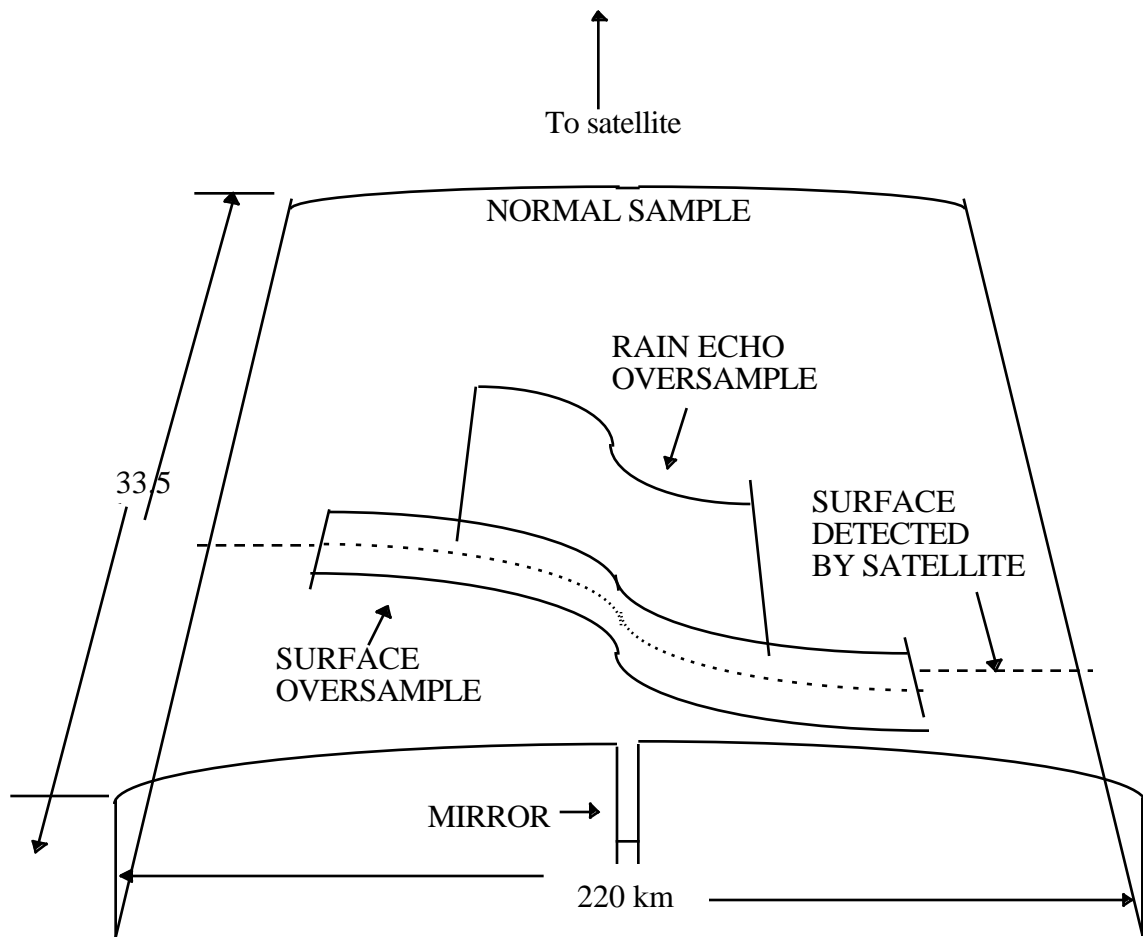

The outer outline encloses the normal sample. The rain echo oversample and the surface oversample occupy subsets of the normal sample region. Both oversamples are vertically located with respect to the surface level detected by the satellite.

Figure 6.1-1
PR Scan Geometry

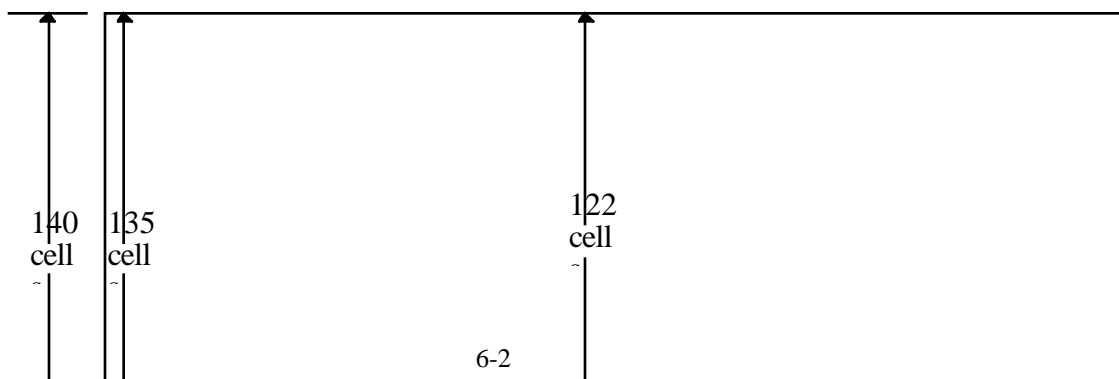

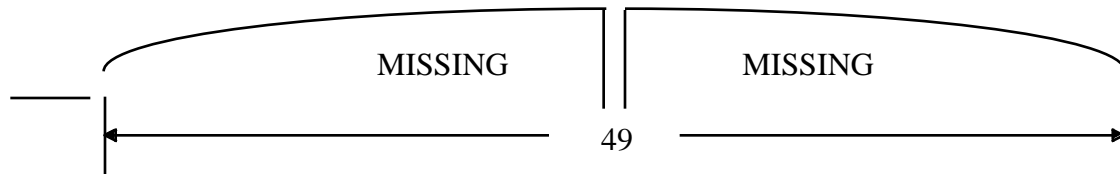


Figure 6.1-2
Normal Sample Data Array

6.2 DESIGN CONSIDERATIONS

The Precipitation Radar (PR) formats for the Level-1A, Level-1B, and Level-1C products were designed in consultation with NASDA, CRL, Dr. Robert Meneghini (a PR algorithm scientist) and Mr. Ted Meyer, Mr. Doug Ilg and Dr. Brand Fortner (EOSDIS).

TSDIS, with guidance from Dr. Meneghini, created a PR synthetic data set in a binary format. The TSDIS Level-1B and Level-1C formats consist of the binary format augmented by satellite information and modified by information from NASDA. The TSDIS Level-1B and Level-1C formats are presented in a Swath Structure and formatted in HDF.

The satellite information includes navigation and calibration information, which was requested by the scientists. The Spacecraft Position and Velocity data are represented in 4-byte floating point precision. Spacecraft Geocentric Position is represented to 10m accuracy, which equates to 6 significant digits since the earth's radius is about 6,370,000 m.

6.3 LEVEL-1A

The Level-1A Product file, "1A-21," is a concatenation of a TSDIS Header, Spacecraft Attitude packets, PR Housekeeping Data packets, PR Science Data packets, Calibration Coefficients, QACs, and a Missing Data Units List (MDUL). Tables 6.3-1, Table 6.3-2, and Table 6.3-3 describe 1A-21. There is an additional file: a detached SFDU header. The SFDU header is described in the **Interface Control Document Between EOSDIS Core System (ECS) and TRMM Science Data and Information System (TSDIS) for the ECS Project**. The sizing parameters used are:

nsec = the number of seconds in a granule. Currently this is 5490.

Table 6.3-1
Description of 1A-21

Name	Size	Description
Header	236 bytes	The Header contains information about the size of components of Level-1A file. A description of Header is provided in Table 6.3-2.
Spacecraft Attitude Packets	70 bytes * nsec / 0.5	The Spacecraft Attitude is contained in the ACS Ancillary Packet (APID # 45), whose packet size is 70 bytes and is recorded every 0.5s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of the Spacecraft Attitude Packet.
ACS QAC	0 - (3 bytes * nsec / 0.5)	QACs for the ACS Ancillary Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
PR Housekeeping Packets	126 bytes * nsec / 10.0	The PR Housekeeping (APID # 48) Packet size is 126 bytes and is recorded every 10.00s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of the PR Housekeeping Packet
Modified PR Housekeeping Packets	198 bytes * nsec / 10.0	The Modified PR Housekeeping Packet size is 198 bytes and is recorded every 10.00s. This packet is an exact copy of the PR Housekeeping Packet except 24 fields are replaced by engineering variables. Since these fields expanded from a 1 byte field to a 4 byte engineering field, the packet size increases by 3 * 24 bytes from the PR Housekeeping Packet size. The modified fields are: 4 fcif_a_temp, 4 fcif_b_temp, 12 panel_temp, and 4 antenna_temp fields.
HK QAC	0 - (3 bytes * nsec / 10.0)	QACs for the PR Housekeeping Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
PR Science Data Packets	6988 bytes * nsec / 0.6	The PR Science Data (APID # 53) Packet size is 6988 bytes and is recorded every 0.6s. Refer to Table 6.3-3 for a detailed description of the PR Science Data Packet.

Table 6.3-1 (continued)
Description of 1A-21

Name	Size	Description
Science QAC	0 - (3 bytes * nsec / 0.6)	QACs for the PR Science Data Packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
Science Packets MDUL	0 - (0.5 * 4 byte * nsec / 0.6)	Missing Data Unit List. Each entry in the list is a pair of 2-byte integer Source Data Unit Sequence Counts. The pair are the Source Data Unit Sequence Counts of the first and last missing packets in a sequence of missing packets. The expected number of missing data units is zero. MDUL is only supplied with science data.
Calibration Coefficients	72 bytes	The Calibration Coefficients consists of 3 tables: Transmission coefficient, 4 bytes Reception coefficient, 4 bytes FCIF I/O Characteristics, 64 bytes Definition of the tables is TBD by NASDA.
IPSDU High Rate Side A Packets	40 bytes * nsec / 1.0	The IPSDU High Rate Side A (APID # 196) Packet size is 40 bytes and is recorded every 1.00s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of this packet.
IPSDU High Rate Side A QAC	0 - (3 bytes * nsec / 1.0)	QACs for these packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
IPSDU High Rate Side B Packets	40 bytes * nsec / 1.0	The IPSDU High Rate Side B (APID # 197) Packet size is 40 bytes and is recorded every 1.00s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of this packet.
IPSDU High Rate Side B QAC	0 - (3 bytes * nsec / 1.0)	QACs for these packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
IPSDU Medium Rate Side A Packets	116 bytes * nsec / 8.0	The IPSDU Medium Rate Side A (APID # 198) Packet size is 116 bytes and is recorded every 8.00s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of this packet.
IPSDU Medium Rate Side A QAC	0 - (3 bytes * nsec / 8.0)	QACs for these packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
IPSDU Medium Rate Side B Packets	116 bytes * nsec / 8.0	The IPSDU Medium Rate Side B (APID # 199) Packet size is 116 bytes and is recorded every 8.00s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of this packet.

Table 6.3-1 (continued)
Description of 1A-21

Name	Size	Description
IPSDU Medium Rate Side B QAC	0 - (3 bytes * nsec / 8.0)	QACs for these packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
IPSDU Low Rate Side A Packets	182 bytes * nsec / 32.0	The IPSDU Medium Rate Side A (APID # 200) Packet size is 182 bytes and is recorded every 32.00s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of this packet.
IPSDU Low Rate Side A QAC	0 - (3 bytes * nsec / 32.0)	QACs for these packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
IPSDU Low Rate Side B Packets	182 bytes * nsec / 32.0	The IPSDU Medium Rate Side B (APID # 201) Packet size is 182 bytes and is recorded every 32.00s. Refer to the TRMM Telemetry and Command Handbook for a detailed description of this packet.
IPSDU Low Rate Side B QAC	0 - (3 bytes * nsec / 32.0)	QACs for these packets. QACs will only be present when some anomaly is detected in the decoding of the packet. Therefore the expected number of QACs is near zero. There are 2 subfields in the QAC: 1. Data Unit Sequence Count (2 bytes) 2. QAC Error Type (1 byte) defined in section 3
Modified IPSDU elements	72 bytes * nsec (estimate)	18 fields of engineering units derived from the IPSDU packets. All fields are 4-byte floats. Details are TBD by NASDA.

Table 6.3-2
Description of 1A-21 Header

Number of bytes	Type	Description
4	Character	“PR ”
4	Integer	Orbit number
12	Character	TSDIS granule ID for the ephemeris file. The format is EPHEM.YYMMDD, where YY is year, MM is month, and DD is day of the month.
10	Character	Orbit Start UTC Date in the format described in section 3
8	Character	Orbit Start UTC Time in the format described in section 3
3	Character	Orbit Start UTC Milliseconds in the format described in section 3
8	**	Orbit Start Spacecraft Time
10	Character	Orbit End UTC Date in the format described in section 3
8	Character	Orbit End UTC Time in the format described in section 3
3	Character	Orbit End UTC Milliseconds in the format described in section 3
8	**	Orbit End Spacecraft Time
10	Character	Orbit First Scan UTC Date in the format described in section 3
8	Character	Orbit First Scan UTC Time in the format described in section 3
3	Character	Orbit First Scan UTC Milliseconds in the format described in section 3
8	**	Orbit First Scan Spacecraft Time
10	Character	Orbit Last Scan UTC Date in the format described in section 3
8	Character	Orbit Last Scan UTC Time in the format described in section 3
3	Character	Orbit Last Scan UTC Milliseconds in the format described in section 3
8	**	Orbit Last Scan Spacecraft Time
8	**	UTCF from the first ACS ancillary packet after Orbit Start Time
4	Integer	Number of scans in the Orbit
4	Integer	Number of bytes of Spacecraft Attitude
4	Integer	Number of bytes of ACS QAC
4	Integer	Number of bytes of PR Housekeeping
4	Integer	Number of bytes of Modified PR Housekeeping
4	Integer	Number of bytes of HK QAC
4	Integer	Number of bytes of PR Science Data
4	Integer	Number of bytes of Science QAC
4	Integer	Number of bytes of Science MDUL
4	Integer	Number of bytes of PR Calibration Coefficients
4	Integer	Number of bytes of IPSDU High Rate Side A
4	Integer	Number of bytes of IPSDU High Rate Side A QAC
4	Integer	Number of bytes of IPSDU High Rate Side B

Table 6.3-2 (continued)
Description of 1A-21 Header

Number of bytes	Type	Description
4	Integer	Number of bytes of IPSDU High Rate Side B QAC
4	Integer	Number of bytes of IPSDU Medium Rate Side A
4	Integer	Number of bytes of IPSDU Medium Rate Side A QAC
4	Integer	Number of bytes of IPSDU Medium Rate Side B
4	Integer	Number of bytes of IPSDU Medium Rate Side B QAC
4	Integer	Number of bytes of IPSDU Low Rate Side A
4	Integer	Number of bytes of IPSDU Low Rate Side A QAC
4	Integer	Number of bytes of IPSDU Low Rate Side B
4	Integer	Number of bytes of IPSDU Low Rate Side B QAC
4	Integer	Number of bytes of Modified IPSDU Elements

** Spacecraft Time format described in the **TRMM Telemetry and Command Handbook**, section 3.3.2

Table 6.3-3
Description of the PR Science Data Packet (APID # 53)

Byte Position	Number of Bytes	Description
1 - 6	6	CCSDS Primary Header. Refer to TRMM Telemetry and Command Handbook for a description
7 - 14	8	CCSDS Secondary Header. Refer to TRMM Telemetry and Command Handbook for a description
15	1	PR mode status: 1= Observation 2= External Calibration 3= Internal Calibration 4= Analysis 5= Stand-By
16 - 23	8	8 (out of 128) contiguous Solid State Power Amplifier (SSPA) transmitted powers
24	1	The SSPA number of the first SSPA power above. SSPA numbers would be 1, 9, 17,..., 121
25	1	Bias of logarithmic amplifier
26	1	Selected value of attenuation frequency converter
27 - 222	196	4 System noise values for each of Observation angle bins No. 1 - 49.
223 - 530	308	28 rain echo oversample data values for the Observation angle bin No. 20 - 30.
531 - 733	203	1 Range bin number of the Peak surface echo (2 bytes) and 5 Surface echo oversample data values for Observation angle bins #11 - 39.
734 - 6979	6246	Rain echo data
6980 - 6988	9	Spare

6.4 INSTRUMENT ANALYSIS PRODUCTS

Since NASDA will monitor the PR instrument and instrument analysis products will not be created in TSDIS, TSDIS will not supply a format for PR instrument analysis products.

6.5 LEVEL-1B

The PR Level-1B product, 1B-21, "PR Power," is written as a Swath Structure (see Section 2) in HDF. The following sections describe the structure and contents of the format.

6.5.1 Structure

Figure 6.5.1-1 shows the structure of the PR Level-1B product in terms of its component objects and their sizes.

The following sizing parameters are used in describing the format:

- nray = number of rays = 49
- nscan = number of scans = 9150

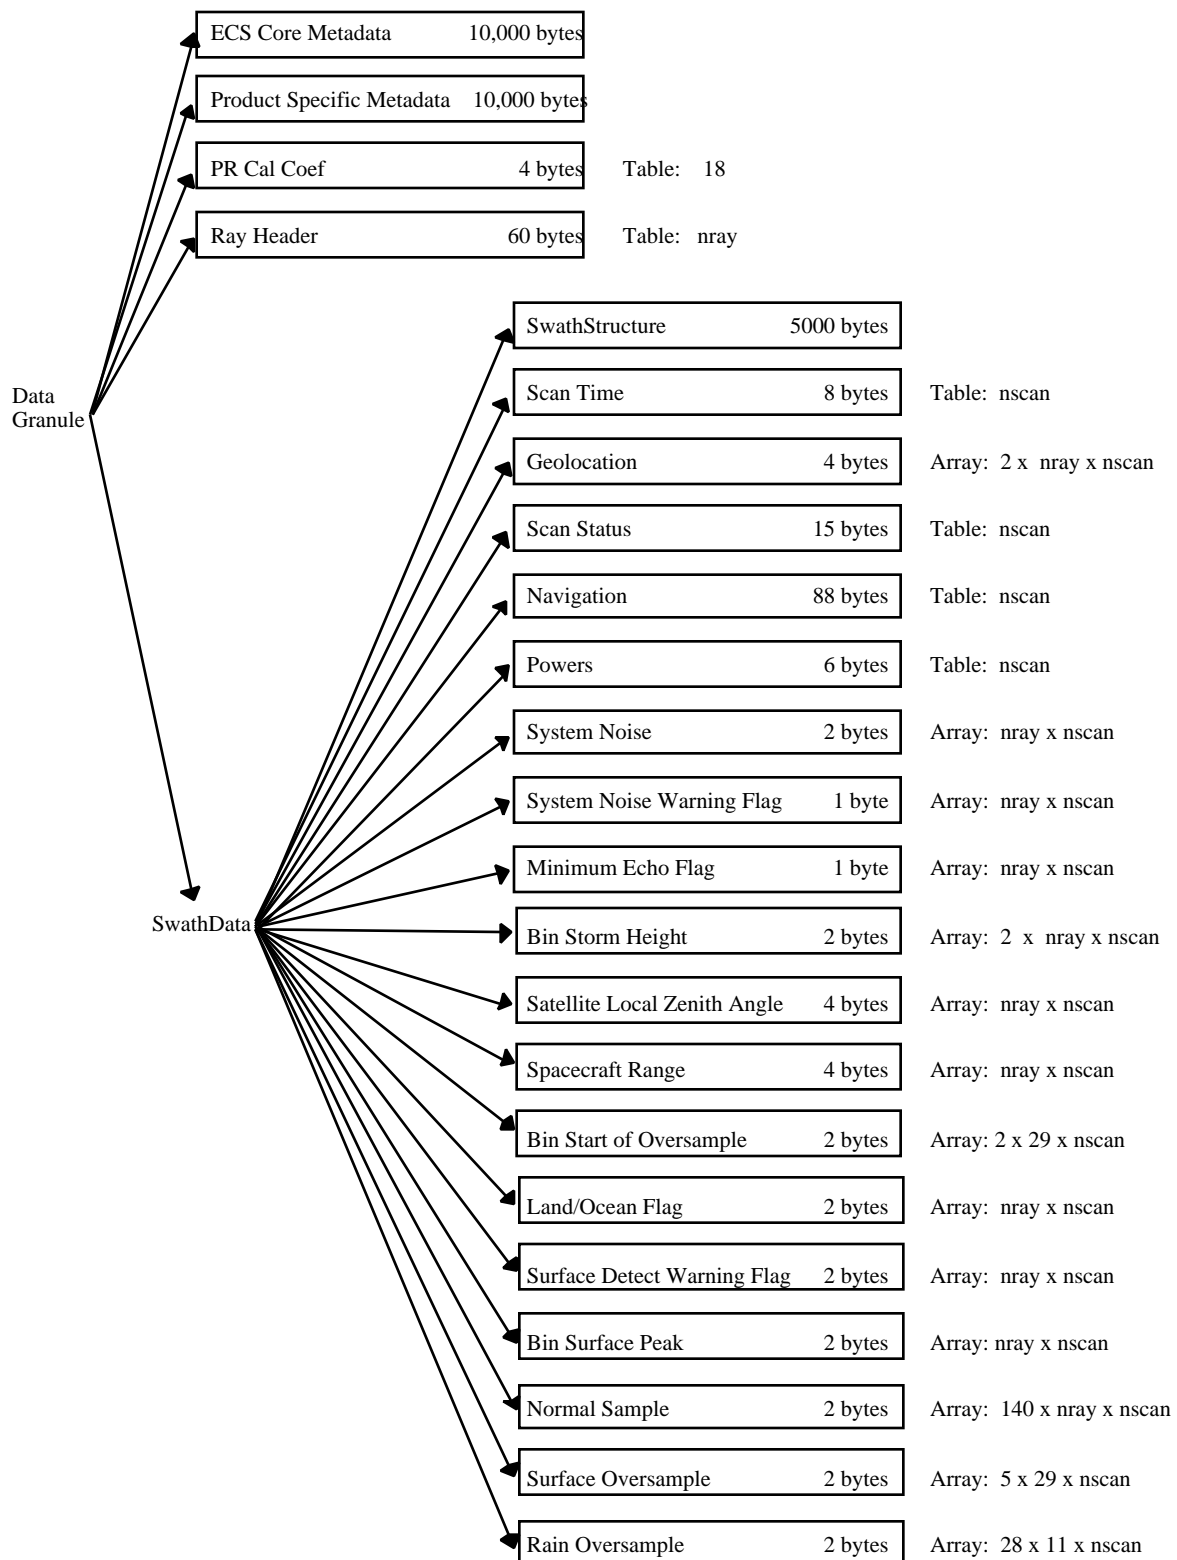


Figure 6.5.1-1
PR Level-1B Structure

6.5.2 Contents

ECS Core Metadata (Attribute, 10,000-byte character):

ECS Core Metadata are those metadata defined by ECS as Core metadata.
See Appendix A.

PS Metadata (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS.
See Appendix B.

PR Cal Coef (Vdata Table, record size 4 bytes, 18 records):

Calibration coefficients for the PR. The records consist of:

Transmission coefficient (unitless, 1 record),

Reception coefficient (unitless, 1 record), and

FCIF I/O Characteristics (unitless, 16 records).

Descriptions are **TBD** by NASDA.

Ray Header (Attribute, record size 60 bytes, 49 records):

Information about each ray (angle bin) that is constant for every scan. The record number represents the angle bin number. Each record describes one ray and is defined in Table 6.5.2-1.

SwathStructure (Attribute, 5,000-byte character):

SwathStructure gives the specification of the swath geometry. See Section 2.

Scan Time (Vdata Table, record size 8 bytes, nscan records):

See the following, Table 6.5.2-2.

Table 6.5.2-1
Ray Header
(Vdata Table, record size 60 bytes, 49 records)

Name	Format	Description
Ray Start	2-byte integer	Range bin number of starting sample
Ray Size	2-byte integer	Number of samples in the ray
Angle	4-byte float	Angle (degrees) of the ray from nadir. The sign of the angle is consistent with the sensor y-axis, i.e., the angle is positive to the right of the direction of travel if the spacecraft is in normal mode.
Starting Bin Distance	4-byte float	Distance (m) between the satellite and the starting sample
Rain Threshold 1	4-byte float	TBD by NASDA (unitless)
Rain Threshold 2	4-byte float	TBD by NASDA (unitless)
Transmitter Antenna Gain	4-byte float	Spaceborne transmitted radar antenna effectiveness (dB)
Receiver Antenna Gain	4-byte float	Spaceborne received radar antenna effectiveness (dB)
One-way 3dB Along-track Beamwidth	4-byte float	Radar beamwidth (radians) at the point transmitted power reaches one half of peak power in the along-track direction.
One-way 3dB Cross-track Beamwidth	4-byte float	Radar beamwidth (radians) at the point transmitted power reaches one half of peak power along the cross-track.
Equivalent wavelength	4-byte float	Equivalent wavelength due to pulse compression (m).
Radar Constant	4-byte float	Radar constant dC (units are dB) in the following equation: $dC = 30\log () - 10\log (2^{10} * \ln 2) + 10\log (K ^2) - 180$ <p>where</p> $K = (\epsilon - 1)/(\epsilon + 2)$ <p>ϵ is the dielectric constant of water</p>
PR Internal delayed time	4-byte float	Units are seconds, description is TBD by NASDA
Range Bin Size	4-byte float	The distance (m) between bins. (125 m)
Logarithmic Averaging Offset	4-byte float	Description TBD by NASDA. Units are dB. (2.5 dB)
Mainlobe Clutter Edge	1-byte integer	Absolute value of the difference in Range Bin Numbers between the detected surface and the edge of the clutter from the mainlobe.
Sidelobe Clutter Range [3]	3 X 1-byte integer	Absolute value of the difference in Range Bin Numbers between the detected surface and the clutter position from the sidelobe. A zero means no clutter indicated in this field since less than 3 bins contained significant clutter.

Table 6.5.2-2
Scan Time
(Vdata Table, record size 8 bytes, nscan records)

Name	Format	Description
Scan Time	8-byte float	A time associated with the scan. The exact relationship between Scan

Name	Format	Description
		Time and the time of each IFOV is described in Section 3. Scan Time is expressed as the UTC seconds of the day.

Geolocation (SDS, array size 2 x 49 x nscan, 4-byte float):

The earth location of the center of the IFOV at the altitude of the earth ellipsoid. The first dimension is latitude and longitude, in that order. The next dimensions are pixel and scan. Values are represented as floating point decimal degrees. Off-earth is represented as less than or equal to -9999.9 Latitude is positive north, negative south. Longitude is positive east, negative west. A point on the 180th meridian is assigned to the western hemisphere.

Scan Status (Vdata Table, record size 15 bytes, nscan records):

The status of each scan is represented in terms of quality, platform and instrument control data, and fractional orbit number as shown in Table 6.5.2-3.

Table 6.5.2-3
Scan Status
(Vdata Table, record size 15 bytes, nscan records)

Name	Format	Description
Missing	1-byte integer	Missing indicates whether information is contained in the scan data. The values are: 0 Scan data elements contain information 1 Scan was missing in the telemetry data 2 Scan data contains no elements with rain
Validity	1-byte integer	Validity is a summary of status modes. If all status modes are routine, all bits in Validity = 0. Routine means that scan data has been measured in the normal operational situation as far as the status modes are concerned. Validity does not assess data or geolocation quality. Validity is broken into 8 bit flags. Each bit = 0 if the status is routine but the bit = 1 if the status is not routine. The non-routine situations follow: Bit Meaning if bit = 1 0 Spare (always 0) 1 Non-routine spacecraft orientation (2 or 3) 2 Non-routine ACS mode (other than 4) 3 Non-routine yaw update status (0 or 1) 4 Non-routine instrument status (other than 1) 5 Non-routine QAC (non-zero) 6 Spare (always 0) 7 Spare (always 0)
QAC	1-byte integer	The Quality and Accounting Capsule of the Science packet as it appears in Level-0 data. If no QAC is given in Level-0, which means no decoding errors occurred, QAC in this format has a value of zero.

Table 6.5.2-3 (continued)
Scan Status
(Vdata Table, record size 15 bytes, nscan records)

Name	Format	Description																				
Geolocation Quality	1-byte integer	<p>Geolocation Quality is broken into 8 bit flags. Each bit = 0 if the status is good but the bit = 1 if the status is bad. Each bit flag is listed below, arranged in approximate descending order of severity:</p> <p>BitMeaning if bit = 1</p> <ul style="list-style-type: none">0 Very bad geolocation results: Latitudes, longitudes, or other parameters out of bounds, or scan missed Earth (excluding CERES deep-sky calibration mode)1 Lat/lon do not vary smoothly from scan to scan. Details TBD. Indicates problem with either current or previous scan, but cannot discriminate between them.2 The difference between the roll/pitch/yaw in consecutive ACS packets was greater than TBD range.3 Roll/pitch/yaw out of normal range. Range TBD.4 Satellite undergoing maneuvers. (Geolocation is less accurate during maneuvers.)5 Questionable Ephemeris or questionable UTCF, including use of predicted ephemeris for quicklook.6 Geolocation calculations failed. Flags whether initialization failed, or whether geolocation processing failed, due to, e.g., error in allocating memory.7 Geolocation quality control not be carried out (e.g., due to error in initialization of QA parameters or failure to write QA verification intermediate product).																				
Data Quality	1-byte integer	The Quality of Data on a given scan line is the percentage of pixels whose values are within the acceptable range listed in the Metadata.																				
Current Spacecraft Orientation	1-byte integer	<table><tr><th>Value</th><th>Meaning</th></tr><tr><td>0</td><td>+x forward</td></tr><tr><td>1</td><td>-x forward</td></tr><tr><td>2</td><td>-y forward</td></tr><tr><td>3</td><td>Inertial - CERES Calibration</td></tr><tr><td>4</td><td>Unknown Orientation</td></tr></table>	Value	Meaning	0	+x forward	1	-x forward	2	-y forward	3	Inertial - CERES Calibration	4	Unknown Orientation								
Value	Meaning																					
0	+x forward																					
1	-x forward																					
2	-y forward																					
3	Inertial - CERES Calibration																					
4	Unknown Orientation																					
Current ACS Mode	1-byte integer	<table><tr><th>Value</th><th>Meaning</th></tr><tr><td>0</td><td>Standby</td></tr><tr><td>1</td><td>Sun Acquire</td></tr><tr><td>2</td><td>Earth Acquire</td></tr><tr><td>3</td><td>Yaw Acquire</td></tr><tr><td>4</td><td>Nominal</td></tr><tr><td>5</td><td>Yaw Maneuver</td></tr><tr><td>6</td><td>Delta-H (Thruster)</td></tr><tr><td>7</td><td>Delta-V (Thruster)</td></tr><tr><td>8</td><td>CERES Calibration</td></tr></table>	Value	Meaning	0	Standby	1	Sun Acquire	2	Earth Acquire	3	Yaw Acquire	4	Nominal	5	Yaw Maneuver	6	Delta-H (Thruster)	7	Delta-V (Thruster)	8	CERES Calibration
Value	Meaning																					
0	Standby																					
1	Sun Acquire																					
2	Earth Acquire																					
3	Yaw Acquire																					
4	Nominal																					
5	Yaw Maneuver																					
6	Delta-H (Thruster)																					
7	Delta-V (Thruster)																					
8	CERES Calibration																					
Yaw Update Status	1-byte integer	<table><tr><th>Value</th><th>Meaning</th></tr><tr><td>0</td><td>Inaccurate</td></tr><tr><td>1</td><td>Indeterminate</td></tr><tr><td>2</td><td>Accurate</td></tr></table>	Value	Meaning	0	Inaccurate	1	Indeterminate	2	Accurate												
Value	Meaning																					
0	Inaccurate																					
1	Indeterminate																					
2	Accurate																					

Table 6.5.2-3 (continued)
Scan Status
(Vdata Table, record size 15 bytes, nscan records)

Name	Format	Description												
PR Mode	1-byte integer	<table><tr><th>Value</th><th>Meaning</th></tr><tr><td>1</td><td>Observation Mode</td></tr><tr><td>2</td><td>Internal Calibration Mode</td></tr><tr><td>3</td><td>External Calibration Mode</td></tr><tr><td>4</td><td>Analysis Mode</td></tr><tr><td>5</td><td>Stand-by Mode</td></tr></table>	Value	Meaning	1	Observation Mode	2	Internal Calibration Mode	3	External Calibration Mode	4	Analysis Mode	5	Stand-by Mode
Value	Meaning													
1	Observation Mode													
2	Internal Calibration Mode													
3	External Calibration Mode													
4	Analysis Mode													
5	Stand-by Mode													
PR Status 1	1-byte integer	FCIF Component used 0 FCIF A 1 FCIF B												
PR Status 2	1-byte integer	Initialization in Onboard Surface Search Algorithm 0 Not initialized 1 Initialized												
Fractional Orbit Number	4-byte float	The orbit number and fractional part of the orbit at Scan Time. The orbit number will be counted from the beginning of the mission. The fractional part is calculated as: (Time - Orbit Start Time) / (Orbit End Time - Orbit Start Time)												

Navigation (Vdata Table, record size 88 bytes, nscan records):
See Appendix D.

Powers (Vdata Table, record size 6 bytes, nscan records):
See the following, Table 6.5.2-4.

Table 6.5.2-4
Powers
(Vdata Table, record size 6 bytes, nscan records)

Name	Format	Description
Radar Transmission Power	2-byte integer	The total (sum) power of 128 SSPA elements corrected with SSPA temperature in orbit, based on temperature test data of SSPA transmission power. The units are dBm * 100.
Transmitted Pulse Width	4-byte float	Transmitted pulse width (s) corrected with FCIF temperature in orbit, based on temperature test data of FCIF.

System Noise (SDS, array size nray x nscan, 2-byte integer):
System Noise (dBm) is an average of the 4 measured system noise values, multiplied by 100 and stored as a 2-byte integer. The range is -120 dBm to -20 dBm with an accuracy of 0.9 dBm. Missing data are given the value of -32,734.

System Noise Warning Flag (SDS, array size nray x nscan, 1-byte integer):
System Noise Warning Flag indicates possible contamination of lower window noise by high towers of rain. 1 means possible contamination; 0 means no possible contamination.

Minimum Echo Flag (SDS, array size nray x nscan, 1 byte-integer):
Flag to show the presence of rain in the ray (angle bin). The values of the flag are:
0 = no rain

1 = rain possible
2 = rain certain

Bin Storm Height (SDS, array size 2 x nray x nscan, 2 byte-integer):

Range Bin Number of the storm top. The first dimension is threshold, with values of possible rain threshold and certain rain threshold in that order. The Bin Storm Heights are generated in the procedure to determine the Minimum Echo Flag. The Bin Storm Height is the top range bin of the portion of consecutive range bins that flagged the ray as rain possible or rain certain.

Satellite Local Zenith Angle (SDS, array size nray x nscan, 4-byte float):

The angle, in degrees, between the local zenith and the beam's center line. The local (geodetic) zenith at the intersection of the ray and the earth ellipsoid is used.

Spacecraft Range (SDS, array size nray x nscan, 4-byte float):

Distance (m) between the spacecraft and the center of the footprint of the beam on the earth ellipsoid.

Bin Start of Oversample (SDS, array size 2 x 29 x nscan, 2 byte-integer):

The first dimension is the Bin Start of Oversample and Surface Tracker Status. The second dimension is the ray. The number of rays is 29 because this information only applies to the rays that have oversample data (rays #11 to #39). The third dimension is the scan. The Bin Start of Oversample is the starting range bin number of the oversample (either surface or rain) data, counting from the top down. The Surface Tracker Status has the value of 0 (Unlock) or 1 (Lock), where Lock means that (1) the on board surface detection detected the surface and (2) the surface detected later by processing on the ground fell within the oversample bins. Unlock means that Lock was not achieved.

Land/Ocean Flag (SDS, array size nray x nscan, 2-byte integer):

Land or ocean information. 0 = ocean; 1 = land.

Surface Detect Warning Flag (SDS, array size nray x nscan, 2-byte integer):

Information on the surface detection. Values are TBD by NASDA.

Bin Surface Peak (SDS, array size nray x nscan, 2 byte-integer):

The range bin number of the peak surface echo. This peak is determined by the post observation ground processing, not by the on board surface detection.

Normal Sample (SDS, array size 140 x nray x nscan, 2 byte-integer):

Return power (dBm) of the normal sample, multiplied by 100 and stored as a 2-byte integer. Since each ray has a different size, the elements after the end of each ray are filled with a value of -32767. Other bins where data is not written due to a transmission, calibration, or other problem, including an entire scan of missing bins, have the value of -32734. See Figure 6.5.2-1. The size of each ray is specified in Ray Header. The range is -120 dBm to -20 dBm with an accuracy of 0.9 dBm.

Surface Oversample (SDS, array size 5 x 29 x nscan, 2 byte-integer):

Return power (dBm) of the surface echo oversample for the central 29 rays (rays #11-39), multiplied by 100 and stored as a 2-byte integer. The range is -120 dBm to -20 dBm with an accuracy of 0.9 dBm. Bins where data is not written due to a transmission, calibration, or other problem, including an entire scan of missing bins, have the value of -32734. In the CrossTrack dimension, Offset = -10 and Increment = 1.

Rain Oversample (SDS, array size 28 x 11 x nscan, 2 byte-integer):

Return power (dBm) of the rain echo oversample for the central 11 rays (rays #20-30), multiplied by 100 and stored as a 2-byte integer. The range is -120 dBm to -20 dBm with an accuracy of 0.9 dBm. Bins where data is not written due to a transmission, calibration, or other problem, including an entire scan of missing bins, have the value of -32734. In the CrossTrack dimension, Offset = -19 and Increment = 1.

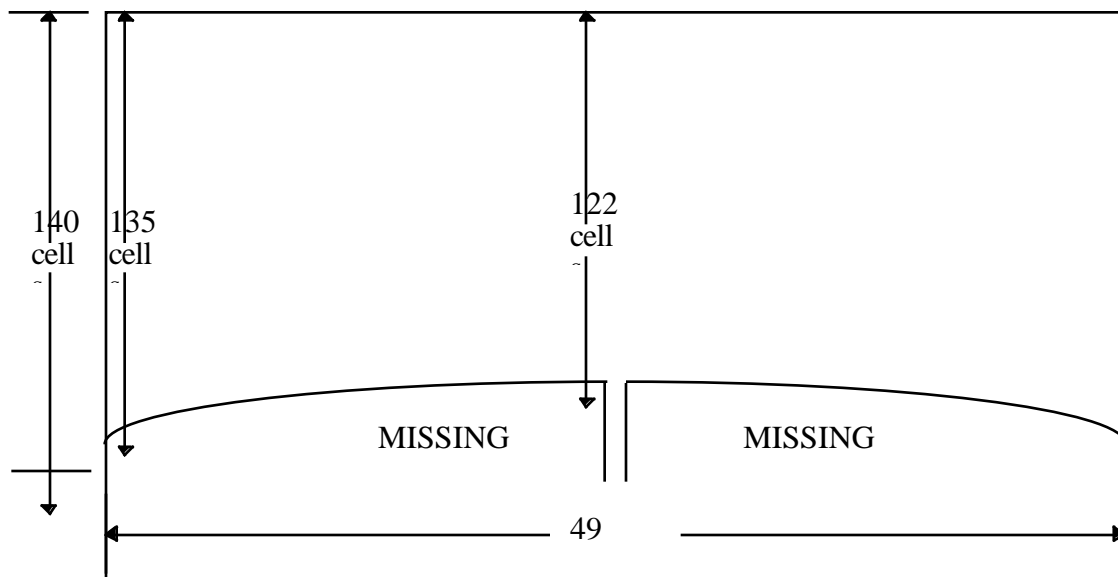


Figure 6.5.2-1
Normal Sample Data Array

6.6 LEVEL-1C

The PR Level-1C product, 1C-21, "PR Reflectivities," has the same format as 1B-21, with 3 changes: The variable in the Normal Sample, Surface Oversample, and Rain Oversample is reflectivity (dBz) in 1C-21. In these 3 objects, the data ranges from -20 dBZ to 80 dBZ with an accuracy of 1.0 dBZ. If a cell (range bin) is determined to have no rain, the reflectivity is set to -32700.

7. GROUND VALIDATION RADAR

7.1 INSTRUMENT AND SCAN GEOMETRY

The purpose of the Ground Validation (GV) activities of TRMM is to provide reliable comparative data during the TRMM mission for space/time averaged rainfall, which will allow the validity of the TRMM satellite measurements to be established within specified limits. The TRMM GV network will consist of 4 Primary and 6 Special Climatology sites. In addition, there will be two sites that consist of multiple radars and are considered Special Climatology-Multiple Radar sites. Table 7.1-1 lists the currently selected sites along with the type and number of radars.

The GV radars consist of simple radars, Doppler radars and a single dual polarization Doppler radar. Operated at the radio frequencies sensitive to precipitation, simple radars measure the returned power from the precipitation signal. This power is converted to reflectivity (Z) and estimates of rainfall are inferred from it. In addition to reflectivity, Doppler radars have the ability to estimate the mean radial velocity (V) of targets by measuring Doppler shifts in the returned signal. At a site with multiple Doppler radars with overlapping coverage it is possible to map the 2D wind field. The United States National Weather Service's WSR-88D radars, also known as Next Generation Radar (NEXRAD) systems, are examples of Doppler radars. Polarimetric radars are capable of transmitting microwaves of different polarization. Measuring the power or reflectivity in the returned signals at each polarization (differential reflectivity, ZDR) can yield an estimate of hydrometeor asymmetry. Table 7.1-2 shows typical ranges for some characteristics of ground-based radars.

As stated above, some parameters that radars measure are; reflectivity (Z), mean radial velocity (V) and, for a polarimetric radar, differential reflectivity (ZDR). In addition to these parameters, Doppler radars can measure spectral width (SW), a measure of the fluctuations in radial velocity. This can provide information on local turbulence. Polarimetric radars (e.g. the Darwin radar) can measure a host of other parameters including reflectivity at both polarizations (ZH, ZV), linear depolarization ratio (LDR), cross correlation coefficient between two polarizations (HV) and propagation differential phase shift (KDP). These parameters can be used to obtain more detailed microphysical information about the hydrometeors. While TRMM GV algorithms will not use these additional parameters they may appear in the raw data tapes. Table 7.1-3 lists the parameters for each radar along with specific range information for the parameters that impact TRMM GV algorithms. Note the values denoted with * are estimates derived from specifications provided by the TRMM Office. These estimated values will most likely need revision when more information is available.

A radar transmits a series of pulses and measures the power in the returned signal as a function of time delay. The time delay is then converted to distance from the radar and the measurements are presented in a number of discrete bins. Figure 7.1-1 shows the geometry of a single radar bin. The position of a bin relative to the radar is defined by two angles (the position of the radar antenna) and a slant range distance. The elevation angle is defined from the local horizontal and the azimuth angle is defined from some prescribed direction (geographic north). The data collected from a specific elevation and azimuth angle is called a ray. By changing the elevation and azimuth, various scanning strategies can be implemented.

TSDIS will receive GV data for volume scan (VOS) mode only. A volume scan consists of a base scan, during which the radar is set at the lowest elevation angle, making a complete 360° sweep in the azimuth direction. The radar antenna is then moved up to a higher elevation angle and another full sweep of azimuth is performed. After the radar antenna has completed a full sweep at the highest elevation angle the VOS is complete. The antenna is moved back to its original position at

the lowest elevation level to begin a new VOS. The number of sweeps (elevation angles) and rays in a sweep vary from radar to radar. Table 7.1-3 lists the characteristics of a VOS for the GV radars.

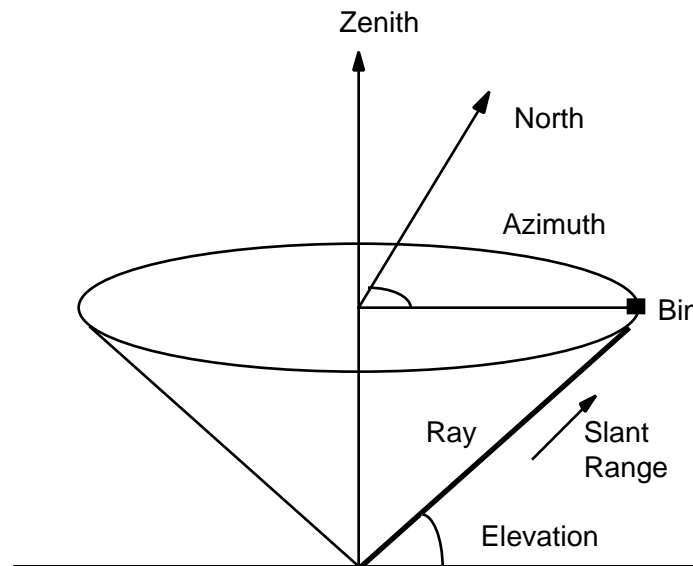


Figure 7.1-1
Schematic Showing the Geometry of a Radar Bin.

Table 7.1-1
Ground Validation Radar Sites

Site Name	Site Type	Number of Radars	Radar Type
Darwin	Primary	1	C band dual-polarized Doppler
Melbourne,FL	Primary	1	NEXRAD
Kwajalein	Primary	1	NEXRAD
Houston, TX	Primary	1	NEXRAD
Florida	Special Cl. Multiple	4	All NEXRAD
Texas	Special Cl. Multiple	4	All NEXRAD
Guam	Special Cl.	1	NEXRAD
Taiwan	Special Cl.	1	S band Doppler
Sao Paolo, Brazil	Special Cl.	1	S band simple
Jerusalem, Israel	Special Cl.	1	S band simple
Chiang Mai,Thailand	Special Cl.	1	S band Doppler
Hawaii	Special Cl.	1	NEXRAD

Table 7.1-2
Characteristics of Ground Based Radars

Antenna	Representative Values
Antenna Diameter	3 to 9 meters
Beam Width	.96 to 1.1 degrees
Gain	39 to 45 dB
Azimuth speed	up to 36 deg/s
Elevation speed	up to 18 deg/s
Transmitter	Representative Values
Wavelength	5.30 to 10.77 cm
Peak Power	250 to 1000 kW
Pulse Width	.5 to several μ s
Polarization	Horizontal, Vertical, Left/Right Circular
Doppler Capability	yes/no
PRF	Variable: 250 to 1500 Hz
Noise Figure	1 to 4 dB

Table 7.1-3
Volume Scan Characteristics

Site / Type	Parameters	VOS per hour	Number of Elevation Angles	Number of Azimuth Angles	Z Range Interval (m)	Z Number of bins	V Range Interval (m)	V Number of bins
Darwin	Z _H ,Z _V ,V,SW, Z _{DR} ,LDR, KDP, _{HV}	6	15	360	300	600	150*	600*
NEXRAD	Z,V,SW	10	14/9	375	1000	475	500	460
Thailand	Z,V,SW	12	16	360	1000	250	1000	250
Israel	Z	12	16	360	1000	295	-	-
Brazil	Z	6	16	360	1000	295	-	-

Taiwan	Z,V,SW	6	15	360	1000	295	500*	295*
--------	--------	---	----	-----	------	-----	------	------

* These are estimates since this information is not currently available.

7.2 DESIGN CONSIDERATIONS

This section describes the design considerations that were taken into account while constructing the Level-1B and Level-1C formats. These formats for ground validation products were designed in consultation with Dr. Robert Houze (the GV Team Leader) and Mr. David Wolff of the TRMM Office. Following direction from these sources, the Doppler Radar Data Exchange (DORADE) format developed by the National Center for Atmospheric Research (NCAR) has been used as a model. The DORADE fields used to develop this file format are outlined in the DORADE specifications dated October 1994, available from NCAR. While the data fields in this file format have been obtained from the DORADE conventions, the file format itself is HDF. This has lead to a small number of unavoidable deviations from the DORADE convention, which is primarily a tape format. This section points out and explains these deviations and illustrates the motivations behind them.

The goal was to accommodate the HDF format while adhering to DORADE conventions whenever possible. Ideally each DORADE block would be mapped to a single HDF object. However one of the constraints of the HDF format is that performance suffers when the number of objects in the HDF file is large. Therefore, the number of HDF objects has been minimized. Table 7.2-1 gives an overview of DORADE block names and their HDF counterparts along with the type of structure used for each. Note that due to the constraints on the type of variables in SDS arrays the Ray Info Block has been separated into two HDF objects. This reduces the total number of HDF objects since the ray information for all rays in a VOS are consolidated into two SDS arrays.

DORADE contains two fields at the beginning of each block, a code identifier which denotes the beginning of a block and a field for the length of a block. This is desirable when the data are read sequentially from tape. However, this is not needed in HDF and if included, would increase the number of objects since the tags and lengths are of different data types. Therefore, the first two entries of every DORADE block do not appear in the HDF structures. All other fields in the HDF objects appear as they do in the appropriate DORADE block. Since the size of many objects is variable, the Toolkit will provide a routine to get information on the sizes of objects in the HDF file.

Table 7.2-1
Names of DORADE Blocks and Corresponding HDF Objects

DORADE Block	DORADE-TRMM_GV HDF Object Code identifier and block length not included	Structure
Comment Block	Comment	Vdata Table
Volume Descriptor	Volume Descriptor	Vdata Table
Radar Descriptor	Radar Descriptor	Vdata Table
Correction Factor Descriptor	Correction Factor Descriptor	Vdata Table
Cell Range Vector	Cell Range Vector	Vdata Table
Sweep Info Block	Sweep Info	Vdata Table
Platform Info Block	Platform Info	SDS Array
Ray Info Block	Ray Info_Integer	SDS Array
	Ray Info_Float	SDS Array
Parameter Descriptor	Parameter Descriptor	Vdata Table
Parameter Data Block	Parameter Data	SDS Array

7.3 LEVEL 1B AND 1C

This section describes the file format which is valid for both Level-1B and Level-1C products. Level-1B contains raw radar data while Level-1C contains range truncated reflectivity and differential reflectivity and quality control masks for both. The only difference between Level-1B and Level-1C formats is the number and type of parameters. Level-1B parameters will include reflectivity (thresholded at -15dBZ), mean velocity and differential reflectivity when available. Level-1C will include reflectivity and differential reflectivity from Level-1B with the addition of a Quality Control Mask for each parameter. Data will be truncated at 230km (slant range) for Level-1B and 200km (slant range) for Level-1C. The Level-1C Quality Control Mask will consist of values from -99 to 99, with -99 indicating a deletion and 99 indicating that the point needs no correction. Values from -10 to +10 in the Quality Control Mask are corrections to the data and should be mathematically added to the corresponding data value. No other values are valid.

Table 7.3-1 lists the names, descriptions, units and data size for each parameter in Level-1 GV products. These parameter names will be entered in the Parameter Name field of the Parameter Descriptor. Additional information can be given in the Parameter Description field (e.g., "Reflectivity" for Z).

Table 7.3-1
Parameters in GV Level-1 Products

Description	Name	Units	Data Size	Product Level
Reflectivity (Z)	Z	dBZ	2-bytes	1B, 1C
Differential Reflectivity (Z_{DR})	ZDR	dB	2-bytes	1B, 1C
Mean Velocity (V)	V	m/s	2-bytes	1B
Quality Control Mask for Z	QCMZ	dBZ	1-bytes	1C
Quality Control Mask for Z_{DR}	QCMZDR	dB	1-bytes	1C

7.3.1 Structure

Figure 7.3.1-1 shows the structure of the GV Level-1B and Level-1C products in terms of the component objects and their sizes. Note that the Vgroups are repeated; e.g. VOS is repeated *nvos* times per granule, Sensor is repeated *nsensor* times per VOS and Parameter is repeated *nparm* times per Sensor.

The GV granule size for Level-1 is 1 hour. Level-1B products contain all VOSs from the raw radar tape. The number of VOSs in a granule at Level-1B depends on the radar type (see Table 7.1-3). At Level-1C, volume scans will be kept every 30 minutes, for 2 VOS per granule, except when the satellite passes over a GV site. Every VOS within +/- 30 minutes of a satellite overpass will be retained at Level-1C. Therefore, the number of VOSs in a granule at Level-1C can range from 2 to 12. The former number applies if no satellite overpass occurs and the latter if there is an overpass of the Israeli radar in the middle of a granule.

The relevant variables which contain sizing information can be found at the locations specified below.

- *nvos* - Number of volume scans in granule. Provided in PS Metadata.
- *nsensor* - Number of sensors in a volume scan. Provided in Volume Descriptor.
- *nparm* - Number of parameters in a volume scan. Provided in Radar Descriptor.
- *nsweep* - Number of sweeps in a volume scan. Obtained from dimensions of Sweep Info
- *nray* - Number of rays in a sweep. Provided in Sweep Info.
- *ncell* - Number of cells in a ray. Obtained from Cell Range Vector.

Typical values of these variables at Level-1B for a NEXRAD system are:

nvos = 10
nsensor = 1
nparm = 2
nsweep = 14
nray = 375
ncell = 230

At Level-1C, typical values for a NEXRAD system (no satellite overpass) are:

nvos = 2
nsensor = 1
nparm = 2
nsweep = 14
nray = 375
ncell = 200

Note that these values vary with the radar and will also vary in time for a given radar.

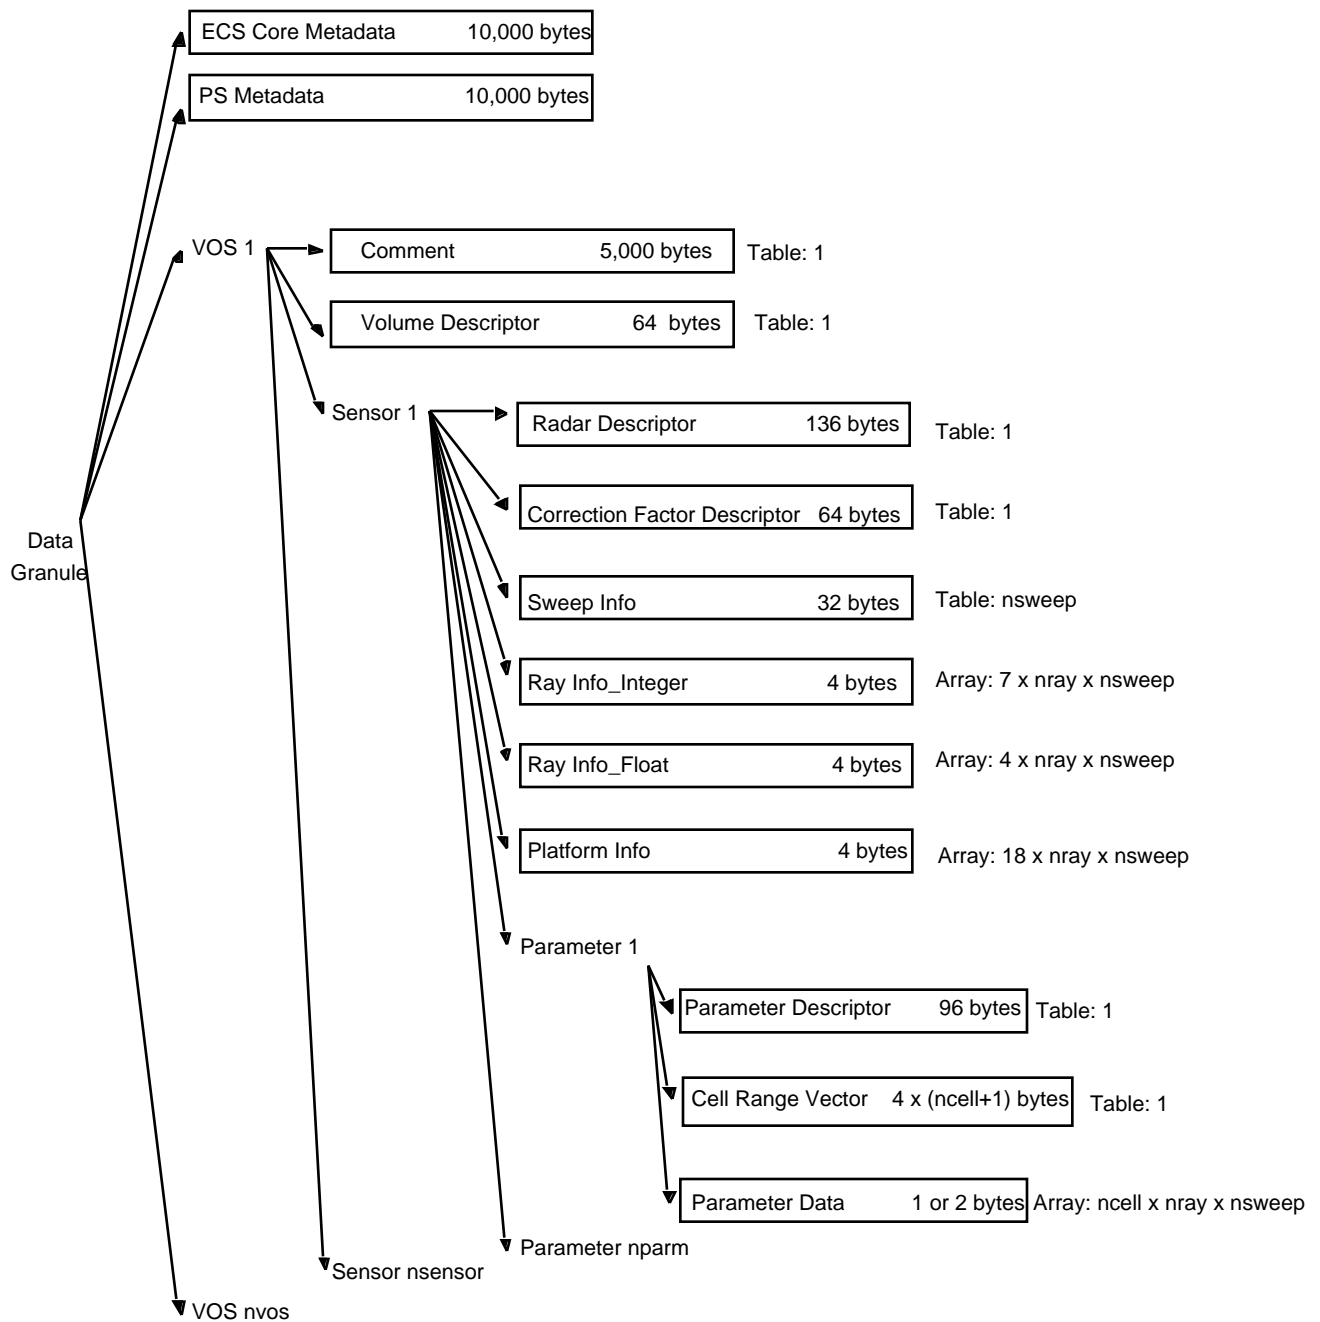


Figure 7.3.1-1
Ground Validation Level-1 Structure

7.3.2 Contents

ECS Core Metadata (Attribute, 10,000 byte character):

ECS Core Metadata are those metadata defined by ECS.

See Appendix A.

PS Metadata (Attribute, 10,000 byte character):

Product Specific (PS) Metadata are metadata defined by and specific to TSDIS.

See Appendix B.

Comment (Vdata Table, 5,000 bytes character):

This can contain any information which is specific to the current volume scan. This information can include, for example, descriptions of staggered pulse repetition rates, unconventional scan strategies or detailed antenna polarization information.

Volume Descriptor (Vdata Table, record size 64 bytes, 1 record):

This contains information on when the data for this volume scan was obtained and when this file was produced. The following table lists the fields contained in the Volume Descriptor.

Name	Format	Description
Version Number	2-byte integer	Version number of DORADE specifications used. Currently 1.0
Volume Number	2-byte integer	Number of this volume scan in granule
Size of Data Record	4-byte integer	The maximum size of a DORADE data record in this VOS: 2bytes x max(ncell).
Project Name	20-byte character	Project name: 20 ASCII characters e.g. TRMM_GV
Date -- Year	2-byte integer	Year of the beginning of this volume scan. (UTC) e.g. 1995
Date -- Month	2-byte integer	Month of the beginning of this volume scan. (UTC) e.g. 8
Date -- Day	2-byte integer	Day of the beginning of this volume scan. (UTC) e.g. 23
Time -- Hour	2-byte integer	Hour of the beginning of this volume scan. (UTC) e.g. 16
Time -- Minute	2-byte integer	Minute of the beginning of this volume scan. (UTC) e.g. 35
Time -- Second	2-byte integer	Second of the beginning of this volume scan. (UTC) e.g. 20
Flight Number for Airborne Radar or IOP Number for Ground Radars	8-byte character	Flight number or IOP (Intense Observation Period) number. 8 ASCII characters.
Generation Facility Name	8-byte character	Name of the data processing facility that generated this volume. 8 ASCII characters e.g. TSDIS.
Generation date -- Year	2-byte integer	Year when this volume was generated. (UTC)
Generation date -- Month	2-byte integer	Month when this volume was generated. (UTC)
Generation date -- Day	2-byte integer	Day when this volume was generated. (UTC)
Number of Sensor Descriptors	2-byte integer	Number of sensor descriptors that are in this particular volume scan.

Radar Descriptor (Vdata Table, record size 136 bytes, 1 record):

Entries in this object include radar/antenna parameters such as radar name, scan mode, frequency and antenna gain. The following table defines all entries in the Radar Descriptor.

Name	Format	Description
Radar Name	8-byte character	Radar name, 8 ASCII characters
Radar Constant	4-byte float	Radar constant (dB). Used in radar equation to convert received power (P) to reflectivity (Z) for a given range (r). Defined here as $Z = P \cdot C \cdot r^2$ (linear)
Nominal Peak Power	4-byte float	Nominal peak power of transmitter (kW)
Nominal Noise Power	4-byte float	Nominal noise power (dBm)
Receiver Gain	4-byte float	Receiver gain (dB)
Antenna Gain	4-byte float	Antenna gain (dB). Ratio of power per unit area along beam axis to that of isotropic radiator at same point.
Radar System Gain	4-byte float	Radar system gain (dB)
Horizontal Beam Width	4-byte float	3 dB one-way beam width along horizontal axis (deg)
Vertical Beam Width	4-byte float	3 dB one-way beam width along vertical axis (deg)
Radar Type	2-byte integer	Radar type: 0 - Ground 1 - Airborne fore 2 - Airborne aft 3 - Airborne tail 4 - Airborne lower fuselage 5 - Shipborne 6 - Not defined 7 - Satellite
Scan Mode	2-byte integer	Scan Mode of the Radar: 0 -- Calibration 1 -- PPI (Constant Elevation) 2 -- Coplane 3 -- RHI (Constant Azimuth) 4 -- Vertical pointing 5 -- Target (Stationary) 6 -- Manual 7 -- Idle (out of control) 8 -- Surveillance 9 -- Vertical sweep (Aircraft only, rotation axis parallels the fuselage)
Nominal Scan Rate	4-byte float	Nominal scan rate (deg/sec). The meaning of this and the following two angles depends on the scan mode specified above
Nominal start angle	4-byte float	Nominal start angle (deg)
Nominal stop angle	4-byte float	Nominal stop angle (deg)
Number of Parameter Descriptors	2-byte integer	Total number of parameter descriptors for this particular radar.
Number of Descriptors	2-byte integer	Total number of descriptors, including parameter descriptors for this radar.
Data Compression	2-byte integer	Data compression in use: 0 - No compression 1 - Data compressed Should always be 0, compression handled by HDF.

Name	Format	Description
Data Reduction Algorithm	2-byte integer	Data reduction algorithm in use: 0 -- No Reduction 1 -- Data recorded between two rotation angles 2 -- Data recorded between two concentric circles 3 -- Data recorded between two altitudes 4 -- Other type of data reduction
Data Reduction Specific Parameter #1	4-byte float	Data reduction specific parameter #1: 1 -- Smallest Positive Angle (deg) 2 -- Inner Circle Diameter (km) 3 -- Minimum Altitude (km) 4 -- TBD if type defined
Data Reduction Specific Parameter #2	4-byte float	Data reduction specific parameter #2: 1 -- Largest Positive Angle (deg) 2 -- Outer Circle Diameter (km) 3 -- Maximum Altitude (km) 4 -- TBD if type defined
Radar Longitude	4-byte float	Radar longitude (deg). For airborne radar only this should be airport longitude.
Radar Latitude	4-byte float	Radar latitude (deg). For airborne radar only this should be airport latitude.
Radar altitude above mean sea level	4-byte float	Radar altitude above mean sea level (km). For airborne radar only this should be airport altitude.
Effective unambiguous velocity	4-byte float	Effective unambiguous velocity (m/s). Determined by inter-pulse period and frequency
Effective unambiguous range	4-byte float	Effective unambiguous range (km). Determined by inter-pulse period and frequency
Number of Transmitted Frequencies	2-byte integer	Number of different frequencies transmitted.
Number of Inter-Pulse Periods Transmitted	2-byte integer	Number of different inter-pulse periods (IPP) transmitted.
Frequency #1	4-byte float	Frequency #1 (GHz) Frequency of transmitted microwave radiation. Determines wavelength.
Frequency #2	4-byte float	Frequency #2 (GHz). See Frequency #1
Frequency #3	4-byte float	Frequency #3 (GHz). See Frequency #1
Frequency #4	4-byte float	Frequency #4 (GHz). See Frequency #1
Frequency #5	4-byte float	Frequency #5 (GHz). See Frequency #1
Inter-Pulse Period #1	4-byte float	Inter-pulse period #1 (msec). Period between successive transmitted pulses, inverse of pulse repetition frequency
Inter-Pulse Period #2	4-byte float	Inter-pulse period #2 (msec). See Inter-pulse period #1
Inter-Pulse Period #3	4-byte float	Inter-pulse period #3 (msec). See Inter-pulse period #1
Inter-Pulse Period #4	4-byte float	Inter-pulse period #4 (msec). See Inter-pulse period #1
Inter-Pulse Period #5	4-byte float	Inter-pulse period #5 (msec). See Inter-pulse period #1

Correction Factor Descriptor (Vdata Table, record size 64 bytes, 1 record):

This object contains correction information that is to be mathematically added to the appropriate field. The following table lists the fields found in the Correction object.

Name	Format	Description
Correction for Azimuth	4-byte float	Correction for azimuth. This number is added to the azimuth angle. (deg)
Correction for Elevation	4-byte float	Correction for elevation. This number is added to the elevation angle. (deg)
Correction for Range Delay	4-byte float	Correction for range delay. This number is added to the range delay. (m)
Correction for Radar Longitude	4-byte float	Correction for radar longitude. This number is added to the radar longitude. (deg)
Correction for Radar Latitude	4-byte float	Correction for radar latitude. This number is added to the radar latitude. (deg)
Correction for Radar Pressure Altitude	4-byte float	Correction for radar altitude pressure, msl. This number is added to the radar altitude pressure. (km)
Correction for Radar Altitude Above Ground Level	4-byte float	Correction for radar altitude above ground level, agl. This number is added to the radar altitude. (km)
Correction for Radar Platform Ground Speed East-West	4-byte float	Correction for radar platform ground speed East-West. This number is added to the radar platform ground speed East-West. (m/s)
Correction for Radar Platform Ground Speed North-South	4-byte float	Correction for radar platform ground speed North-South. This number is added to the radar platform ground speed North-South. (m/s)
Correction for Radar Platform Vertical Velocity	4-byte float	Correction for radar platform vertical velocity. This number is added to radar platform vertical velocity. (m/s)
Correction for Radar Platform Heading	4-byte float	Correction for radar platform heading. This number is added to the radar platform heading. (deg)
Correction for Radar Platform Roll	4-byte float	Correction for radar platform roll. This number is added to the radar platform roll. (deg)
Correction for Radar Platform Pitch	4-byte float	Correction for radar platform pitch. This number is added to the radar platform pitch. (deg)
Correction for Radar Platform Drift	4-byte float	Correction for radar platform drift. This number is added to the radar platform drift. (deg)
Correction for Radar Rotation Angle	4-byte float	Correction for radar rotation angle. This number is added to the radar rotation angle. (deg)
Correction for Radar Tilt Angle	4-byte float	Correction for radar tilt angle. This number is added to the radar tilt angle. (deg)

Sweep Info (Vdata Table, record size 32 bytes, nsweep records):

This object contains information specific to a sweep. The record is repeated nsweep times in a VOS. The table below lists all fields in the Sweep Info object.

Name	Format	Description
Radar Name	8-byte character	Name of radar. 8 ASCII characters. Note: as in DORADE, this field is repeated here.
Sweep Number	4-byte integer	Sweep number of this volume scan. The first sweep in volume scan is sweep 1.
Number of Rays in Sweep	4-byte integer	Number of rays in this sweep.
True Start Angle	4-byte float	Angle of instantaneous field of view at start of sweep (deg).
True Stop Angle	4-byte float	Angle of instantaneous field of view at end of sweep (deg).
Fixed Angle	4-byte float	The constant angle of this sweep (deg). PPI: angle is elevation. RHI: angle is azimuth. etc.
Filter Flag	4-byte integer	Filter flag: 0 -- No filtering 1 -- Filter in use (description of filter placed in comment block)

Ray Info Integer (SDS, array size 7 x nray x nsweep, 4-byte integers):

This array contains information on the current ray which can be represented as integer.

The structure of the first vector is repeated for each ray in the sweep. The following table lists each unique entry in the array.

Entry	Name	Description
1	Ray Sweep Number	Number of the sweep that contains this ray.
2	Julian Day	Julian Day for this ray.
3	Hour	Hour of the day for this ray. UTC
4	Minute	Minutes for this ray.
5	Second	Seconds for this ray.
6	Millisecond	Milliseconds for this ray.
7	Ray Status	Status of current ray: 0 -- Normal 1 -- Transition (antenna repositioning) 2 -- Bad 3 -- Questionable

Ray Info_Float (SDS, array size 4 x nray x nsweep, 4-byte float):

This array contains information on the current ray which can be represented as floating point. The structure of the first vector is repeated for each ray in the sweep. The following table lists each unique entry in the array. Figures referenced appear in the DORADE specifications document dated Oct. 1994.

Entry	Name	Description
1	Azimuth Angle	Azimuth angle for this ray (deg). See DORADE specification Figure 9 for definition when platform is moving..
2	Elevation Angle	Elevation angle for this ray (deg). See DORADE specification Figure 9 for definition when platform is moving.
3	Peak Transmitted Power	Average peak transmitted power for this ray (kw).
4	Radar True Scan Rate	True scan rate of radar for this ray (deg/s)

Platform Info (SDS, array size 18 x nray x nsweep, 4-byte float):

One complete vector of entries represents the platform information for one ray. This structure is repeated for each ray in a sweep. Each vector has a one to one correspondence with a vector in the Ray Info objects. Figures referenced below are included at the end of this section. The figures are taken from the DORADE specifications document dated Oct. 1994. Note that TSDIS Ground Validation products will not use this object, since products are generated for stationary radars only. The table below lists all entries in the Platform Info block.

Entry	Name	Description
1	Radar Longitude	Radar longitude (deg). East is positive. West is negative. - 180 to +180
2	Radar Latitude	Radar latitude (deg). North is positive. South is negative. - 90 to +90
3	Radar Pressure Altitude	Radar pressure altitude, msl (km)
4	Radar Altitude Above Ground Level	Radar altitude above ground level, agl (km)
5	Platform Ground Speed (East-West)	Platform ground speed along East - West (m/s)
6	Platform Ground Speed (North-South)	Platform ground speed along North - South (m/s)
7	Platform Vertical Velocity	Platform vertical velocity (m/s) Positive is up, Negative is down
8	Platform Heading	Platform heading (deg) See Figure 7.3.2-3.
9	Platform Roll	Platform roll (deg) See Figure 7.3.2-1.
10	Platform Pitch	Platform pitch (deg) See Figure 7.3.2-2.
11	Platform Drift	Platform drift (deg) See Figure 7.3.2-3.
12	Radar Rotation Angle	Radar rotation angle (deg) See Figure 7.3.2-4
13	Radar Tilt Angle	Radar tilt angle (deg) See Figure 7.3.2-5
14	Horizontal Wind Speed at Radar (East-West)	Horizontal wind speed at radar along East-West (m/s)
15	Horizontal Wind Speed at Radar (North-South)	Horizontal wind speed at radar along North-South (m/s)
16	Vertical Wind Speed at Radar	Vertical wind speed at radar (m/s) Positive is up, Negative is down
17	Heading Change Rate	Heading change rate (deg/s)
18	Pitch Change Rate	Pitch change rate (deg/s)

TSDIS-P907
Release 3
October 30, 1996

Parameter Descriptor (Vdata Table, record size 96 bytes, 1 record):

This Vdata table contains information unique to a given parameter. This object is repeated for each parameter in this volume scan. Each parameter name can be described in 8 ASCII characters. The following table lists the entries in the Parameter Descriptor.

Name	Format	Description
Name of Parameter	8-byte character	Name of this parameter. 8 ASCII characters.
Description of Parameter	40-byte character	A description of this parameter. 40 ASCII characters.
Units of Parameter	8-byte character	Units for this parameter. 8 ASCII characters.
Inter-Pulse Periods Used	2-byte integer	Bit 0 set to 1 indicates IPP #1 was used. Bit 1 set to 1 indicates IPP #2 was used. Bit 2 set to 1 indicates IPP #3 was used. Bit 3 set to 1 indicates IPP #4 was used. Bit 4 set to 1 indicates IPP #5 was used.
Transmitted Frequencies Used	2-byte integer	Bit 0 set to 1 indicates frequency #1 was used. Bit 1 set to 1 indicates frequency #2 was used. Bit 2 set to 1 indicates frequency #3 was used. Bit 3 set to 1 indicates frequency #4 was used. Bit 4 set to 1 indicates frequency #5 was used.
Receiver Bandwidth	4-byte float	Receiver bandwidth (MHz)
Pulse Width	2-byte integer	Pulse width (length) of transmitted wave (m)
Polarization of Transmitted Wave(s)	2-byte integer	Polarization of transmitting antenna(s) used for this parameter: 0 -- Horizontal 1 -- Vertical 2 -- Circular, Right-handed 3 -- Elliptical (specify in comment block) 4 -- Circular, Left-handed 5 -- Dual Polarization Dual polarization indicates that two transmitted waves of different polarization were used to measure this parameter. The polarizations used should be implicit in the parameter description, e.g. Differential reflectivity (Z_{DR}). Any needed clarifications should appear in the comment block for this VOS.
Number of Samples	2-byte integer	Number of samples used in a single dwell time, e.g. many samples may be averaged to produce an average power for a single cell.
Parameter Data Type	2-byte integer	Data type of parameter: 1 -- 8 bit integer 2 -- 16 bit integer 3 -- 32 bit integer 4 -- floating point
Threshold Field	8-byte character	Name of threshold value. 8 ASCII characters. This is the name of the threshold parameter that was used to threshold these data. Note: This can and often is different from the parameter in this descriptor. For example; velocity can be thresholded by power values.
Threshold Value	4-byte float	Units depend on threshold field above. The value of the parameter was set to the Deleted or Missing Data Flag (below) when the threshold parameter described above takes on the threshold value or below.
Scale Factor	4-byte float	Scale factor to be used in obtaining meteorological value from data, see offset factor below.
Offset Factor	4-byte float	Offset factor to be used in obtaining meteorological value from data. meteorological value = (recorded value-offset factor)/scale factor

Deleted or Missing Data Flag	4-byte integer	Flag for missing or deleted data , from TSDIS specs: -99 for 1 byte integer -9999 for 2 byte integer -9999 for 4 byte integer -9999.9 for float
------------------------------	----------------	---

Cell Range Vector (Vdata, record size $4 \times (\text{ncell} + 1)$, 1 record):

This contains information on the distance in meters (m) from the radar to the center of a cell for a single parameter. The first entry contains the number of cells in this vector. The remaining entries contain the distance from the radar to cell n. Since the number of cells and the distances to a cell may be different for each parameter, this vector is repeated for each parameter. The table below lists the entries in the Cell Range Vector.

Name	Format	Description
Number of Cells	4-byte integer	Number of cells in this cell vector
Distance to cell 1	4-byte float	Distance from radar to center of cell 1 (m)
.	.	.
.	.	.
Distance to cell n	4-byte float	Distance from radar to center of cell n (m)

Parameter Data (SDS, array size $\text{ncell} \times \text{nray} \times \text{nsweep}$, 1-byte or 2-byte integer):

This array contains all the data for a single parameter for a single volume scan. This structure is repeated for each parameter. The type of the parameter is specified in the Parameter Descriptor, i.e. 1-byte integer or 2-byte integer. The possible parameters are listed in Table 7.3-1. Currently the data sizes for GV radar data do not include 4-byte integer or floating point values.

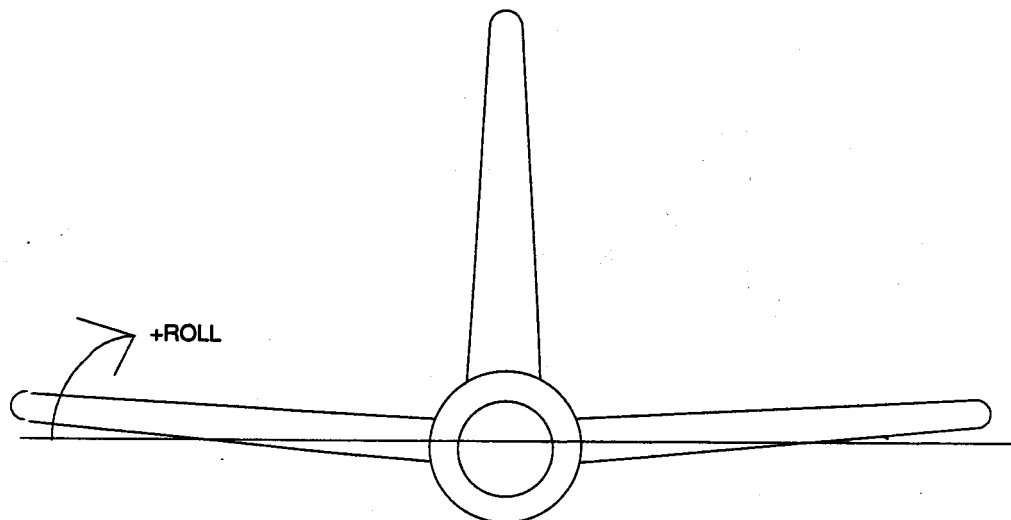


Figure 7.3.2-1

ROLL: Zero is Horizontal, Left Wing Up is Positive Looking Forward
Note: This figure appears as Figure 3 in the DORADE specifications document.

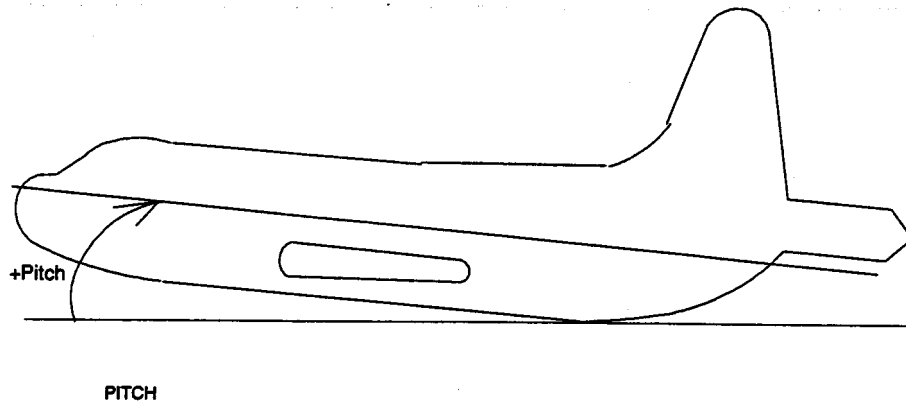


Figure 7.3.2-2
PITCH Horizontal is Zero, Nose Up is Positive
Note: This figure appears as Figure 4 in the DORADE specifications document.

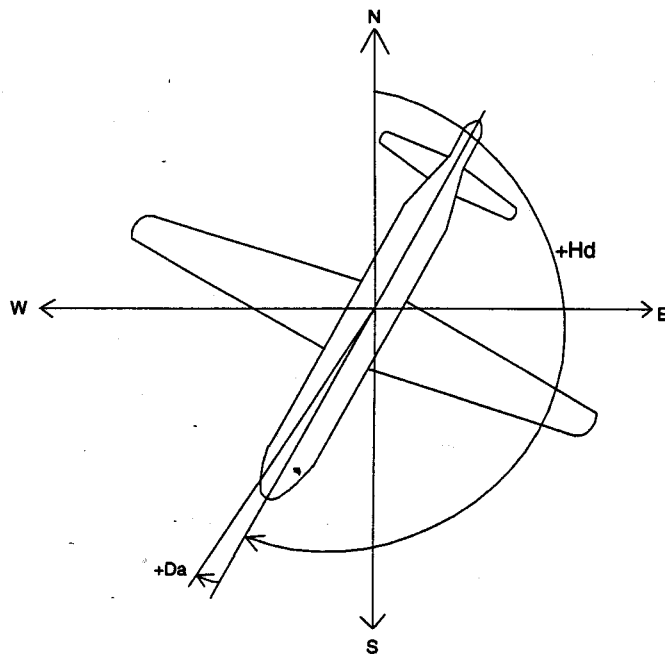


Figure 7.3.2-3
HEADING and DRIFT: Zero heading is True North, Positive is Clockwise While Looking Down.
Zero drift is equal to heading, positive drift is aircraft's motion vector more clockwise than heading. Note: This figure appears as Figure 5 in the DORADE specifications document..

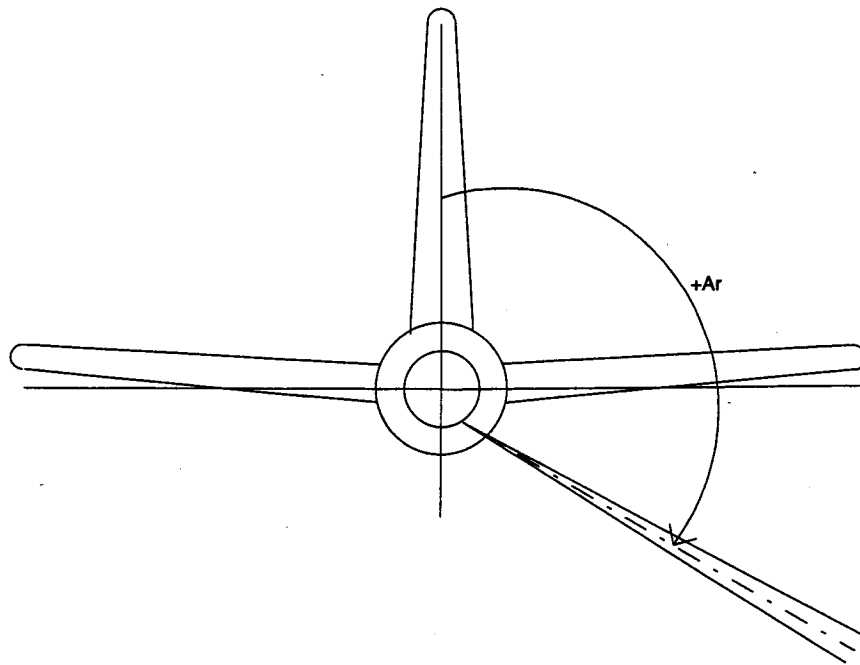


Figure 7.3.2-4
ROTATION ANGLE: Angle Between the Radar Beam and the Vertical Axis of the Aircraft, Zero is along vertical stabilizer, Positive is Clockwise Looking Forward. Note: This figure appears as Figure 7 in the DORADE specifications document..

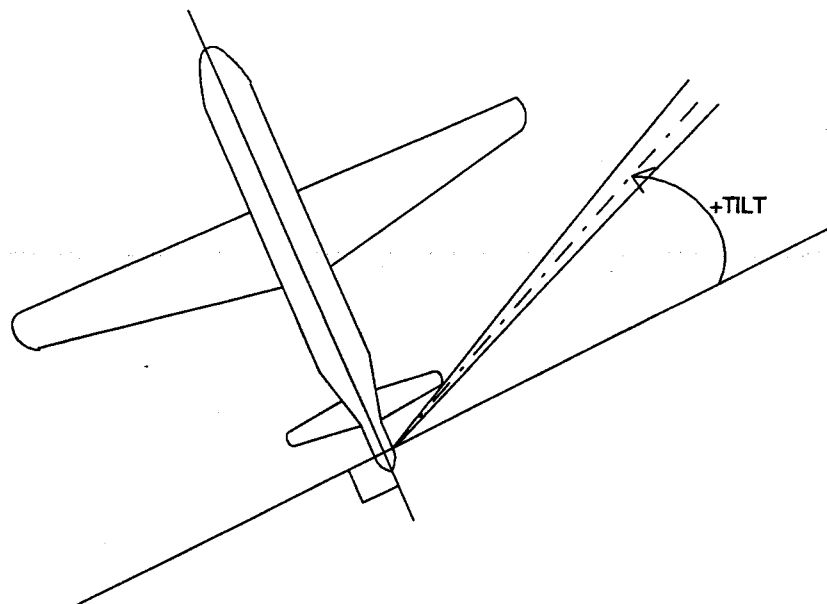


Figure 7.3.2-5
TILT: Angle Between Radar Beam (When it is In a Plane Containing the Longitudinal Axis of the Aircraft) and a Line Perpendicular to the Longitudinal Axis. Zero is Perpendicular to Longitudinal Axis, Positive is Towards Nose of Aircraft. Note: This figure appears as Figure 8 in the DORADE specifications document.

8. ISSUES

ECS Core Metadata Issues

1. Ground Stations / Ground Instruments are not represented in the current ECS Sources object class. The Source Short Name in the list above should be tied to a Ground Instrument for GV granules and there should be an equivalent for Satellite Short Name to indicate the ground site/radar name. ECS now includes elements to represent ground radar and ground platforms. Issue **closed**. TSDIS will provide a list of Satellite Short Names to ECS.
2. Issue **closed**.
3. TSDIS would like to set up pre-defined collections in ECS to contain TRMM granules. The collections would be defined by product type and grouped under higher-level collections identifying the instrument and satellite that produced the data. Given these pre-defined collections, we would prefer not to provide collection information on each granule such as: Discipline Keyword, Geophysical Parameter Keyword, Spatial Keyword, Temporal Keyword, and Vertical Coverage Value. Is this acceptable even though these are listed as required granule metadata in table 4-15? Issue **closed**. These Metadata were moved to Collection Metadata (not in each granule).
4. Are Keplerian elements acceptable as an Orbit Model? Yes. Issue **closed**.
5. TRMM currently produces none of the following ECS quality flags:
 - Geophysical location accuracy
 - Bias
 - Situational Bias
 - Random Error
 - Radiometric Accuracy

Should they be added? Can we generate values for them? Do they vary on a granule by granule basis or are they constant for a given instrument? Issue **closed**. ECS has changed the quality flag to "Science Quality Flag". TSDIS supplies Science Quality Flag.
6. Reprocessing status is intended to identify future intent to reprocess a granule. What are we going to do with this field? .
7. The TRMM products are not generated by an ECS PGE. What should TRMM products put in the PGE metadata field? There also does not seem to be any tie in the current granule metadata to indicate which Algorithm Package generated the granule. Should the granule metadata in the files include Algorithm Package Name and Algorithm Version? Issue **closed**. PGE metadata moved to Collection Metadata.
8. There are some TRMM products that are 3D. Should a Dss Altitude System Definition be included in these products to further define the vertical coverage of the data? Issue **closed**. ECS does not require this metadata.
9. The L2-3 GV products do not fit well into the geographic coordinate system which is described in terms of degree x degree resolution. Is there a way to specify km x km resolution of gridded products? Issue **closed**. These will be user defined structures.

10. If using an Orbit Model to represent spacial coverage, what value should be used for Path Number if a granule contains an entire orbit? Issue **closed**. Path Number deleted.

9. ABBREVIATIONS AND ACRONYMS

A

ACS Attitude Control System
APID Application Process ID

C

CCSDS Consultative Committee for Space Data Standards

D

DORADE Doppler Radar Data Exchange

E

ECS EOSDIS Core System
EOSDIS EOS Data and Information System

F

FORTTRAN Formula Translation

G

GMT Greenwich Mean Time
GV Ground Validation

H

HDF Hierarchical Data Format

I

ID Identifier
IFOV Instantaneous Field of View
IPSDU Instrument Power Switching and Distribution Unit

M

MDUL Missing Data Units List

N

NASDA National Space Development Agency
NCSA National Center for Supercomputing Applications
NEXRAD Next Generation Radar
NMC National Meteorological Center

O

ODL Object Development Language (defined in the Planetary Data System Standards Reference)

P

PR Precipitation Radar
PS Product Specific

Q

QAC Quality and Accounting Capsule

S

SDS Scientific Data Set
SFDU Standard Format Data Unit
SSPA Solid State Power Amplifier

T

TBD To Be Determined
TMI TRMM Microwave Imager
TRMM Tropical Rainfall Measuring Mission
TSDIS TRMM Science Data and Information System

U

UTC Universal Time Coordinated
UTCf Universal Time Correlation Factor

V

VIRS Visible Infrared Scanner
VOS Volume Scan

10. GLOSSARY

Attribute	A structure for textual information in HDF attached to an SDS or a file.
Earth Ellipsoid	An imaginary surface of the earth in the shape of an ellipsoid that coincides with the average Mean Sea Level.
Eccentricity	A quantity expressing the elliptical shape of an orbit.
Geoid	An imaginary surface of the earth that coincides with Mean Sea Level over oceans and is extended through continents.
Granule	The amount of information contained in one file (e.g., one orbit for Level-1 and Level-2 satellite data or one hour for Level-1 and Level-2 ground validation data).
Housekeeping Data	Satellite data concerning an instrument or platform (e.g., voltages, temperatures, doors open or shut, etc.)
Increment	The data element interval to which each geolocation element applies (i.e., if Stride = 2, each successive geolocation applies to every other data element).
Meridional	North-South
Metadata	Information about a data set (e.g., date recorded, source, or purpose).
Offset	The first data element to which the first geolocation element applies.
Planetary Grid Structure	An EOSDIS defined structure in HDF to store data organized in one of the planetary grids defined by EOSDIS.
Radar Grid Structure	A user defined structure in HDF to store data organized in a grid with constant distance spacing on the surface of the earth.
Radar Structure	A user defined structure in HDF to store data organized in original ground radar spherical geometry.
Scan	A sweep of a sensor on a satellite
Steradian	The unit of solid angle, abbreviated sr. The total solid angle about a point is equal to 4 steradians.
Swath Structure	An EOSDIS defined structure in HDF to store data organized by scans.
Vdata	An HDF object that is a table of records.
Vgroup	An HDF group of objects or other Vgroups.

Zonal

East-West

Appendix A ECS Core Metadata Elements

ECS Core Metadata Format (Attribute, maximum 10,000-byte character):

ECS Core Metadata are those metadata defined by ECS as Core metadata. A description of each ECS Core metadata element follows. The size column refers to the size of the name plus value. The actual element would take up an additional 100 bytes due to metadata implementation overhead. In other words, the true size is the listed size plus 100 bytes.

ECS Metadata Element	Size (bytes)	Description	Products Using Element
ID of ECS Data Object (collection)	65	The unique identifier of an ECS collection to which this granule belongs. (i.e. "Total Power, Noise")	All
Size MB ECS Data Object	20	The size attribute will indicate the volume of data contained in the granule.	All
Spatial Coverage Type	32	This attribute denotes whether the locality/coverage requires horizontal, vertical or both spatial domain and coordinate system definitions.	All
Ellipsoid Name	50	Name of the ellipsoid.	L1 & L2 Satellite Products
Equatorial Radius	50	Equatorial radius of the earth ellipsoid	L1 & L2 Satellite Products
Denominator of Flattening Ratio	50	The reciprocal of the flattening ratio, f, where $f = 1 - b / a$, a = Equatorial radius of the earth ellipsoid and b = Polar radius of the earth ellipsoid	L1 & L2 Satellite Products
Orbit Model Name	97	The reference name to the orbital model to be used to calculate the geolocation of this data to determine global spatial extent.	L1 & L2 Satellite Products
Orbit Number	17	The orbit number to be used in calculating the spatial extent of this data.	L1 & L2 Satellite Products
Semi Major Axis	19	Half of the long axis of the orbit ellipse.	L1 & L2 Satellite Products
Mean Anomaly	17	Angle around the orbit at the Epoch Time about the Ellipse center from the ascending node.	L1 & L2 Satellite Products
Right Ascension of Ascending Node	42	Right Ascension in Geocentric Inertial Coordinates of the north bound equator crossing.	L1 & L2 Satellite Products
Argument of Perigee	28	Angle from the ascending node to perigee.	L1 & L2 Satellite Products
Eccentricity	21	Eccentricity of ellipse.	L1 & L2 Satellite Products

ECS Metadata Element	Size (bytes)	Description	Products Using Element
Inclination	20	Angle between Orbit plane and Earth Equatorial plane.	L1 & L2 Satellite Products
Epoch date	19	Reference date for orbital elements	L1 & L2 Satellite Products
Epoch time	19	Reference time for orbital elements	L1 & L2 Satellite Products
West Bounding Coordinate	29	The degree value for the west longitude of boundary.	All
East Bounding Coordinate	29	The degree value for the east longitude of boundary.	All
North Bounding Coordinate	30	The degree value for the north latitude of boundary.	All
South Bounding Coordinate	30	The degree value for the south latitude of boundary.	All
Center Point Latitude	52	Latitude of center point of product.	L1 GV
Center Point Longitude	52	Longitude of center point of product.	L1 GV
Radius	15	Distance in km from Point	L1 GV
Latitude Resolution	27	The minimum difference between two adjacent latitude values expressed in Geographic Coordinate units of measure	L3 Satellite & L2-3 GV
Longitude Resolution	28	The minimum difference between two adjacent longitude values expressed in Geographic Coordinate units of measure.	L3 Satellite & L2-3 GV
Geographic Coord Units	112	Units of measure used for the latitude and longitude resolution values.	L3 Satellite & L2-3 GV
Temporal Range Type	39	This tells the system how temporal coverage is specified for the granule.	All
Beginning Date	25	The date when the granule coverage began.	All
Beginning Time	23	The time when the granule coverage began.	All
Ending Date	22	The date when the granule coverage ended.	All
Ending Time	20	The time when the granule coverage ended.	All
QA Parameter Name	98	"ScienceQualityFlag"	All
QA Parameter Value	99	A post processing indication of quality by the algorithm developer. The Quality Indicator takes the form of 4 possible ASCII strings: "NOT BEING INVESTIGATED", "BEING INVESTIGATED", "FAILED", or "PASSED".	All
Reprocessing Status	40	This attribute identifies the intent of the product author to reprocess the data (i.e. data gaps, geolocation accuracy, scientist review quality flags).	All
Browse Package Reference	105	This attribute will contain a system-resolvable reference to an HDF package containing a collection of browse granules.	All
Contact Name	93	The name of the algorithm developer related to this granule. The contact name supplied here must exist in the ECS contact database.	All

Appendix B PS Metadata Elements

PS Metadata (Attribute, maximum 10,000-byte character): Product Specific Metadata are metadata defined by TSDIS. The size column refers to the size of the name plus value. The actual element would take up an additional 100 bytes due to metadata implementation overhead. In other words, the true size is the listed size plus 100 bytes. A description of each PS metadata element follows:

Metadata Element	Estimated Size (bytes)	Description	Products Using Element
Granule ID	50	TSDIS granule ID	All
Algorithm ID	50	Name of the algorithm (i.e. 1B-21)	All
Algorithm Version	50	Version of the algorithm. (i.e. 1, 2, 3, etc.)	All
Calibration Coefficient Version	50	Version of the calibration coefficients. (i.e. 1, 2, 3, etc.)	1B-21, 1C-21
Missing Data	50	Number of missing scans in the orbit (satellite data), missing rays (ground radar data), or missing observations (rain gauge or disdrometer data) expressed in percent.	L1 and L2 data
Percentage of bad or missing pixels	50	List by channel of the percentage of bad or missing pixels in the orbit (satellite data) or granule (GV data).	L1 and L2 data
Number of Data Gaps	50	The number of data gaps in the data in the orbit (satellite data) or granule (GV data).	L1 and L2 data
Data Gaps Duration	50	The sum of the durations of the data gaps in seconds in the orbit (satellite data) or granule (GV data).	L1 and L2 data
Data Accuracy	50	List by channel of the accuracies of the data.	L1 data
Maximum valid value of channel	50	List by channel of the maximum valid value (value specified by the instrument scientist).	L1 data
Minimum valid value of channel	50	List by channel of the minimum valid value (value specified by the instrument scientist).	L1 data
Min Max Units	50	Units of the Minimum and Maximum valid values.	L1 and L2 data
Input files	300	List of input file names.	All
Date of Generation of input files	100	List of the generation dates of the input files. For ingested files, this is the date TSDIS received the file.	All
Data center source of input files	50	List of the data centers generating the input files, e.g., TSDIS, NMC	All
Generation date	50	Date the dataset was generated	All
Day/Night	50	Percentage scans during the orbit in daytime mode	1B-01
Mean Motion	50	Number of orbits per day, including fractions of orbits.	L1 and L2 Satellite Products
Orbit Adjust Flag	50	Orbit Adjust Flag. Values are as follows: 0 = no orbit adjust activity during this orbit. 1 = orbit adjustment control modes occurred during this orbit.	L1 and L2 Satellite Products
Attitude Mode Flag	50	Attitude Mode Flag. Values are as follows: 0 = forward mode (+X forward) throughout this orbit 1 = backward mode (-X forward) throughout this orbit 2 = yaw maneuver during this orbit	L1 and L2 Satellite Products

Metadata Element	Estimated Size (bytes)	Description	Products Using Element
Solar beta angle at beginning of granule	50	Elevation of sun in the orbit plane at the orbit start.	L1 and L2 Satellite Products
Solar beta angle at end of the granule	50	Elevation of sun in the orbit plane at the orbit end.	L1 and L2 Satellite Products
Sensor Alignment	50	Euler Sequence (3 integers) and Euler angles for rotation from spacecraft coordinates to sensor coordinates in degrees. (These are to be provided by the science team)	L1 and L2 Satellite Products
Sensor Alignment Channel Offsets	50 x number of channels	Euler Sequence (3 integers) and Euler angles for rotation from sensor coordinates to Channel coordinates with angles separately for each channel in degrees. (These are to be provided by the science team if needed, but they are not nominally used in TSDIS processing since geolocation is not done per channel)	L1 and L2 Satellite Products
Scan Path Model	100	Parameters describing the scan path as used for pixel geolocation. For a (nominal) conical scan model the following parameters are used: Axis of Scan (+/- 1,2,or 3). Reference Axis for zero rotation angle (+/- 1,2,or 3), and Scan cone angular radius in degrees. Starting rotation angle relative to the scan axis in degrees, Total rotation angle spanned in degrees, Active scan duration time in seconds (between first and last pixel), and Time Offset between spacecraft time of the sensor data packet and the first pixel time, in seconds.	L1 and L2 Satellite Products
Scan Path Parameters Per Channel	100	Parameters describing the scan path separately for each channel in degrees. (These are to be provided by the science team if needed, but they are not nominally used in TSDIS processing since geolocation is not done per channel)	L1 and L2 Satellite Products
Ephemeris file ID	50	TSDIS granule ID for the ephemeris file. The format is EPHEM.YYMMDD, where YY is year, MM is month, and DD is day of the month.	L1 and L2 Satellite Products
Orbit size	50	Number of scans in Orbit.	L1 and L2 Satellite Products
Orbit First Scan UTC Date	50	Orbit First Scan UTC Date in the format described in section 3	L1 and L2 Satellite Products
Orbit First Scan UTC Time	50	Orbit First Scan UTC Time in the format described in section 3	L1 and L2 Satellite Products
Orbit First Scan UTC Milliseconds	50	Orbit First Scan UTC Milliseconds in the format described in section 3	L1 and L2 Satellite Products
Orbit First scan time - Spacecraft clock - seconds	50	The seconds field of the spacecraft clock time of the first scan in the orbit	L1 and L2 Satellite Products

Metadata Element	Estimated Size (bytes)	Description	Products Using Element
Orbit First scan time - Spacecraft clock - subseconds	50	The subseconds field of the spacecraft clock time of the first scan in the orbit	L1 and L2 Satellite Products
Orbit Last Scan UTC Date	50	Orbit Last Scan UTC Date in the format described in section 3	L1 and L2 Satellite Products
Orbit Last Scan UTC Time	50	Orbit Last Scan UTC Time in the format described in section 3	L1 and L2 Satellite Products
Orbit Last Scan UTC Milliseconds	50	Orbit Last Scan UTC Milliseconds in the format described in section 3	L1 and L2 Satellite Products
Orbit Last scan time - Spacecraft clock - seconds	50	The seconds field of the spacecraft clock time of the last scan in the orbit	L1 and L2 Satellite Products
Orbit Last scan time - Spacecraft clock - subseconds	50	The subseconds field of the spacecraft clock time of the last scan in the orbit	L1 and L2 Satellite Products
UTCf seconds	50	The seconds field of the UTCf for the granule.	L1 and L2 Satellite Products
UTCf subseconds	50	The subseconds field of the UTCf for the granule.	L1 and L2 Satellite Products
UTCf flag	50	Flag that indicates the origin of the UTCf. 0 = UTCf was derived from the first ACS packet in the orbit. 1 = a corrected UTCf was used.	L1 and L2 Satellite Products
Leap second flag	50	Flag that indicates if a leap second occurred within the granule. 0 = no; 1 = yes.	All
Radar wavelength	50	Wavelength of the radar.	L1 PR and GV Products
Minimum Reflectivity Threshold	50	The threshold (dBz) below which ground based radar reflectivity data is set to the missing value.	L1 and L2 GV
Temperature Telemetry Abnormal	50	TBD by NASDA.	1B-21, 1C-21
Numbers of Troubled SSPA Units	50	TBD by NASDA. Range is 1 - 128.	1B-21, 1C-21
Numbers of Troubled LNA Units	50	TBD by NASDA. Range is 1 - 128.	1B-21, 1C-21
Radar site name	50	Name of the GV radar or radar site, whichever is applicable	GV, gauge and disdrometer Products
Radar city	50	Nearest city to the radar site	GV, gauge and disdrometer Products
Radar state	50	State or province containing the radar site, if applicable	GV, gauge and disdrometer Products
Radar country	50	Country containing the radar site	GV, gauge and disdrometer Products

Metadata Element	Estimated Size (bytes)	Description	Products Using Element
Number of VOS	50	The number of volume scans in this granule	GV L1 and L2 Products

Metadata Element	Estimated Size (bytes)	Description	Products Using Element
Radar Grid Origin Latitude	50	Latitude (degrees) of the origin.	GV L2 and L3
Radar Grid Origin Longitude	50	Longitude (degrees) of the origin.	GV L2 and L3
Radar Grid Origin Altitude	50	Altitude (km) of the origin.	GV L2 and L3
Radar Grid Spacing x	50	The zonal interval (km) between grid points.	GV L2 and L3
Radar Grid Spacing y	50	The meridional interval (km) between grid points.	GV L2 and L3
Radar Grid Spacing z	50	The vertical interval (km) between grid points.	GV L2 and L3
Radar Grid Size x	50	The number of grid points in the zonal grid direction.	GV L2 and L3
Radar Grid Size y	50	The number of grid points in the meridional grid direction.	GV L2 and L3
Radar Grid Size z	50	The number of grid points in the vertical grid direction.	GV L2 and L3

Appendix C

Reversibility from Level-1A to Level-0

Level-1A data are required to be “reversible to their input formats and values.” The Level-1A formats in this document are simple concatenations of Level-0 packets. Figure C-1 maps Level-0 to Level-1A. Note that lines entering Level-1A Attitude cross the lines entering Instrument Housekeeping because Level-0 is sorted by time but Level-1A is sorted by data type. Figure C-1 is simplified. Not shown are elements that occur only for PR (Calibration Coefficients and IPSDU packets), QACs and MDULs, and the Level-1A SFDU header and metadata.

All the sections of the Level-1A File except the Header are copies of Level-0 packets file as well as information about decoding errors (QACs) and missing packets (MDUL). The Header contains information about the structure of the Level-1A file, start and end times, and the UTCF derived from the first ACS packet in the orbit. Since they are straight copies, all the Level-1A data are “reversible to their input formats and values.”

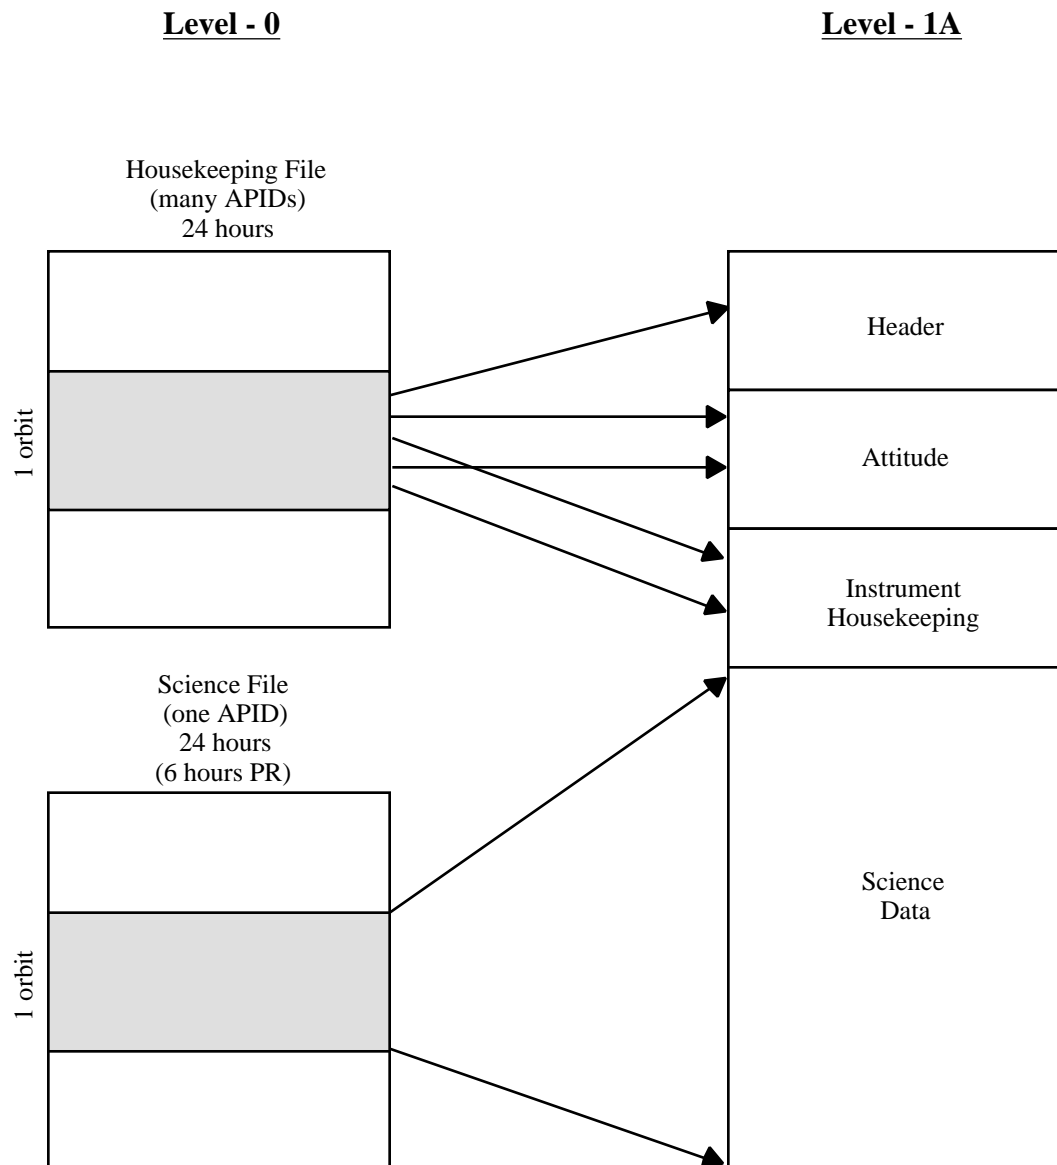


Figure C-1
Level-0 to Level-1A Mapping

Appendix D Navigation

Navigation (Vdata, record size 88 bytes, nscan records):

Name	Format	Description
Spacecraft Geocentric Position [3]	3 X 4-byte float	The position (m) of the spacecraft in Geocentric Inertial Coordinates at the Scan mid-Time (i.e., time at the middle pixel/IFOV of the active scan period). The order of components is: x, y, and z. Geocentric Inertial Coordinates are also commonly known as Earth Centered Inertial coordinates. These coordinates will be True of Date (rather than Epoch 2000 which are also commonly used), as interpolated from the data in the Flight Dynamics Facility ephemeris files generated for TRMM.
Spacecraft Geocentric Velocity [3]	3 X 4-byte float	The velocity (ms^{-1}) of the spacecraft in Geocentric Inertial Coordinates at the Scan mid-Time. The order of components is: x, y, and z.
Spacecraft Geodetic Latitude	4-byte float	The geodetic latitude (decimal degrees) of the spacecraft at the Scan mid-Time.
Spacecraft Geodetic Longitude	4-byte float	The geodetic longitude (decimal degrees) of the spacecraft at the Scan mid-Time.
Spacecraft Geodetic Altitude	4-byte float	The altitude (m) of the spacecraft above the Earth Ellipsoid at the Scan mid-Time.
Spacecraft Attitude [3]	3 X 4-byte float	<p>The satellite attitude Euler angles at the Scan mid-Time. The order of the components is yaw, pitch, and roll, and these provide angles in degrees for a 3-2-1 Euler rotation sequence from Orbital Coordinates to the spacecraft body coordinates. Orbital Coordinates represent an orthogonal triad in Geocentric Inertial Coordinates where the Z-axis is toward the geocentric nadir, the Y-axis is perpendicular to the spacecraft velocity opposite the orbit normal direction, and the X-axis is approximately in the velocity direction for a near circular orbit.</p> <p>Note this is geocentric, not geodetic, referenced, so that pitch and roll will have twice orbital frequency components due to the onboard control system following the oblate geodetic Earth horizon. Note also that the yaw value will show an orbital frequency component relative to the Earth fixed ground track due to the Earth rotation relative to inertial coordinates.</p>
Sensor Orientation Matrix [3 X 3]	3 X 3 X 4-byte float	The rotation matrix from the instrument coordinate frame to Geocentric Inertial Coordinates at the Scan mid-Time.
Greenwich Hour Angle	4-byte float	The rotation angle (degrees) from Geocentric Inertial Coordinates to Earth Fixed Coordinates.